

STAINLESS STEEL BRAIDED FLEXIBLE SUPPLY LINE

3/8" Compression x 1/2" FIP



EASTMAN®

STEEL-FLEX®

Peace of Mind for the Professional Plumber

TECHNICAL DATA

DESCRIPTION: Stainless Steel Braided Flexible Supply Line - 3/8" Comp x 1/2" FIP

CONSTRUCTION:

Braiding - 304 Stainless Steel

Internal Hose - Polyvinyl Chloride (PVC)

Metal Nuts - Nickel Plated Brass Alloy

Ferrule - Steel

Washer - Rubber

TECHNICAL SPECIFICATIONS:

Working Pressure - 125 PSI

Burst Pressure - 1500 PSI

Working Temperature - 40° F to 150° F


Max Temperature - 180° F

Connectors are lead free and contain a weighted average lead content of ≤ 0.25%.

PART#	Dimension "A"	Inner/Master	Pack	UPC
48030	9"	25/100	Bulk	091712480303
48003	12"	25/100	Bulk	091712211945
48004	16"	25/100	Bulk	091712480044
48005N	20"	25/100	Bulk	091712480051
48006	24"	25/100	Bulk	091712480068
48007	30"	25/100	Bulk	091712480075
48008	36"	25/100	Bulk	091712480082
48301	48"	25/50	Bulk	091712483014
48302	60"	25/50	Bulk	091712483021
48303	72"	-/50	Bulk	091712483038

MADE IN: Eastman Factory in China

ROUGH IN DRAWING

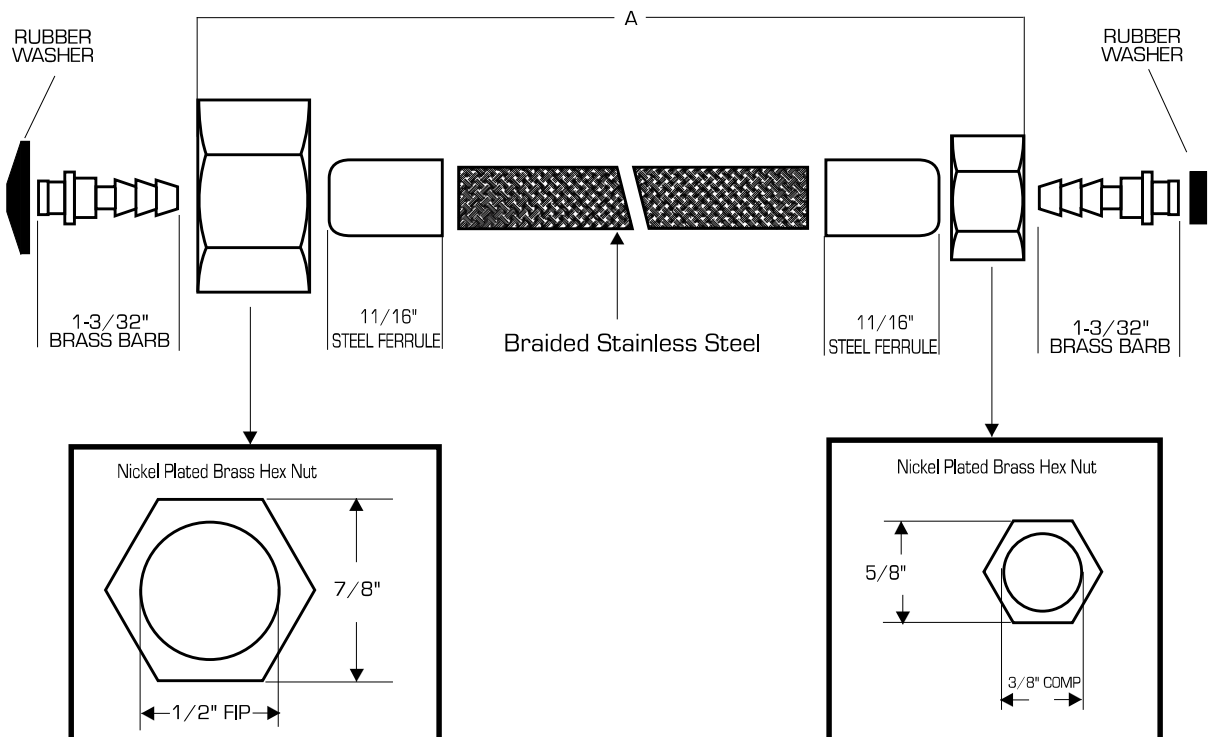

ALL DIMENSIONS SHOWN ARE NOMINAL

Meets requirements for NSF-61



Approved



Complies with Low Lead Plumbing Laws