

## **Faucets**


TAG:

## 5F-4WWX03-4W-S

# Hand Sink w/ 4" Wall Mount Faucet

### **Architect/Engineering Specifications:**

Stainless steel hand sink with side splash shields and 4" wall mount mixing faucet with polished chrome plated brass body, 2 13/16" swivel gooseneck with 2.2 GPM aerator, ceramic cartridges, 4" wrist action handles, and 1/2" NPT male inlets. Certified to ASME A112.18.1/CSA B125.1, ASME A112.18.2/CSA B125.2, ASME A112.19.3/CSA B45.4, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

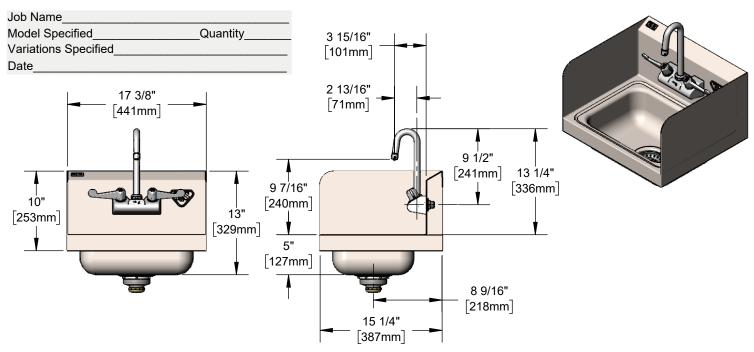

#### Features & Benefits:

- Stainless steel wall mount hand sink w/ side splash shields and 3 1/2" drain
- 4" c/c wall mount mixing faucet w/ polished chrome plated brass body
- 2 13/16" swivel gooseneck w/ 2.2 GPM aerator
- Quarter-turn ceramic cartridges
- equip 4" wrist action handles w/ color coded screws
- 1/2" NPT male inlets
- Material: Polished chrome plated brass body & chrome plated metal handles, stainless steel sink

#### **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- ASME A112.19.3 / CSA B45.4 (Sink & Drain)
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)
- NSF / ANSI 2 (Sink & Drain)
- ASME A112.18.2 / CSA B125.2 (Drain)





Warranty: One Year (Limited)

### Performance Data:

Pressure: 20 - 125 psi [1.38 - 8.62 bar]

Temperature: 40°F - 140°F [4.44°C - 60 °C]

Flow Rate: 2.2 GPM [8.33 L/min] @ 60 psi [4.14 bar]

Discharge Rate: 18.00 GPM [68.14 L/min] max









