



Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Hot Food Tables, open base design, model _____ . Top and body are heavy gauge type 430 stainless steel. Beaded top openings are 12½" x 20½". Heating compartments are 8"-deep, galvanized, and insulated on all four sides and bottom with 1" fiberglass or equal. Recessed control panel with individual infinite controls offer high and low settings. Each compartment fitted with 500-watt heating element for 120-volt units, and 750-watt heating element for 208- and 240-volt units. 6' cord and plug extends from the bottom right hand side of the unit. Furnished with polycarbonate cutting board. Legs are 1½" O.D. tubing, with adjustable undershelf and 4"-diameter casters.



#PDHT4-120 portable hot food table

Options / Accessories

- | | |
|---|---|
| <input type="checkbox"/> Spillage pans | <input type="checkbox"/> Tray shelf |
| <input type="checkbox"/> Bolted-in undershelf | <input type="checkbox"/> Dish shelf |
| <input type="checkbox"/> Overshelves | <input type="checkbox"/> Rolltop cover |
| <input type="checkbox"/> Tray slides | <input type="checkbox"/> Hardwood cutting board |

* See Catalog Sheet #EG30.18 for more information on Flex-Master® overshelves

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our SpecFAB® Division.

Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.: _____
Project No.: _____
S.I.S. No.: _____

Electric Hot Food Tables— Open Base, Portable

MODELS:

- | | | | |
|-------------------------------------|-------------------------------------|--------------------------------------|--------------------------------------|
| <input type="checkbox"/> PDHT2-120 | <input type="checkbox"/> PDHT4-120 | <input type="checkbox"/> SPDHT2-120 | <input type="checkbox"/> SPDHT4-120 |
| <input type="checkbox"/> PDHT2-208* | <input type="checkbox"/> PDHT4-208* | <input type="checkbox"/> SPDHT2-208* | <input type="checkbox"/> SPDHT4-208* |
| <input type="checkbox"/> PDHT2-240* | <input type="checkbox"/> PDHT4-240* | <input type="checkbox"/> SPDHT2-240* | <input type="checkbox"/> SPDHT4-240* |
| <input type="checkbox"/> PDHT3-120 | <input type="checkbox"/> PDHT5-208* | <input type="checkbox"/> SPDHT3-120 | <input type="checkbox"/> SPDHT5-208* |
| <input type="checkbox"/> PDHT3-208* | <input type="checkbox"/> PDHT5-240* | <input type="checkbox"/> SPDHT3-208* | <input type="checkbox"/> SPDHT5-240* |
| <input type="checkbox"/> PDHT3-240* | | <input type="checkbox"/> SPDHT3-240* | |

* Available in three-phase. See chart on back page.

Construction

- Table body and top are constructed of highly polished 22 gauge 430 series stainless steel.
- Top features die stamped beaded openings measuring 12½" x 20½" (307 x 510mm).
- A poly cutting board, 8" (203mm) wide and ½" (13mm) thick, is mounted on drop brackets located on control side of unit, allowing movement through standard doorway.
- Legs are 1½" (41mm) O.D. tubing fitted with 4" (102mm) diameter NSF certified ball-bearing casters.
- All models are 30½" (774mm) wide and 34" (863mm) high.
- Units feature 1" (25mm)-wide push bar attached to the end panel at operator's right.

Controls

- Individual infinite controls offer high and low selections along with eight other temperature settings.
- Indicator light remains on continuously while control is in "ON" position.

Heat compartments

- Each heat compartment is 8" (203mm) deep and lined with 22 gauge galvanized steel.
- Each compartment is insulated on all four sides and bottom with 1" (25mm) thick fiberglass or equal.

Electrical

- Each compartment is fitted with a 500-watt or 750-watt tubular element above the insulated bottom. 500-watt element is standard on units wired for 110-120 volts; 750-watt element is standard for units wired for 220-240 volts.
- 6' (1829mm) cord with plug extends from the bottom of the right hand control side as standard equipment.
- 120-volt models are single phase. 208- and 240-volt models available in single- or three-phase.

Certifications / Approvals



New York MEA 376-84-E

AUTOQUOTES



Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com


Eagle Foodservice Equipment, Eagle MHC, SpecFAB®, and Retail Display are divisions of Eagle Group. ©2015 by the Eagle Group



Profit from the Eagle Advantage®

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Electric Hot Food Tables—Open Base, Portable

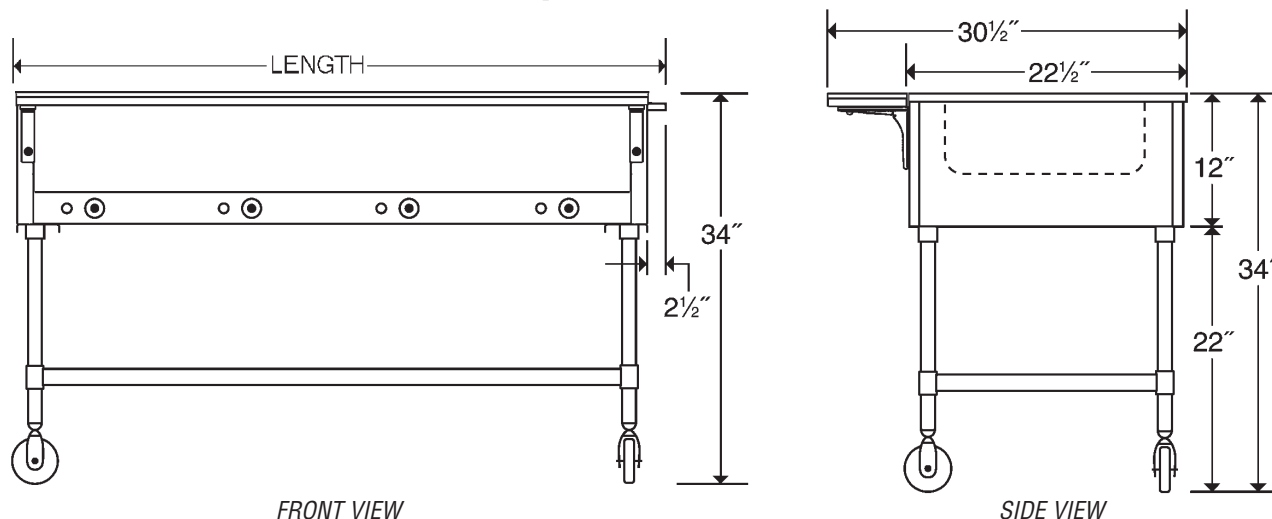

“PDHT” units feature galvanized legs & undershelf. “SPDHT” units feature stainless steel legs & undershelf.

| SINGLE-PHASE | | | | THREE-PHASE * | | | | # of top openings | electrical data | length | | weight | |
|---------------------------------|--------------------------------------|-------|-----------|---------------------------------|--------------------------------------|-------|-----------|-------------------|-----------------|---------|------|--------|------|
| WITH GALVANIZED BASE model # | WITH STAINLESS STEEL BASE model # | amps | NEMA plug | WITH GALVANIZED BASE model # | WITH STAINLESS STEEL BASE model # | amps | NEMA plug | | | in. | mm | lbs. | kg |
| PDHT2-120 | SPDHT2-120 | 8.3A | 5-15P | n/a | n/a | - | - | 2 | 1000W, 120V | 35 1/2" | 902 | 101 | 45.8 |
| PDHT2-208 | SPDHT2-208 | 7.2A | 6-15P | PDHT2-208-3 | SPDHT2-208-3 | 6.3A | 15-20P | 2 | 1500W, 208V | 35 1/2" | 902 | 101 | 45.8 |
| PDHT2-240 | SPDHT2-240 | 6.25A | 6-15P | PDHT2-240-3 | SPDHT2-240-3 | 5.4A | 15-20P | 2 | 1500W, 240V | 35 1/2" | 902 | 101 | 45.8 |
| PDHT3-120 | SPDHT3-120 | 12.5A | 5-15P | n/a | n/a | - | - | 3 | 1500W, 120V | 50 1/2" | 1283 | 129 | 58.5 |
| PDHT3-208 | SPDHT3-208 | 10.8A | 6-15P | PDHT3-208-3 | SPDHT3-208-3 | 6.3A | 15-20P | 3 | 2250W, 208V | 50 1/2" | 1283 | 129 | 58.5 |
| PDHT3-240 | SPDHT3-240 | 9.38A | 6-15P | PDHT3-240-3 | SPDHT3-240-3 | 5.4A | 15-20P | 3 | 2250W, 240V | 50 1/2" | 1283 | 129 | 58.5 |
| PDHT4-120 | SPDHT4-120 | 16.6A | 5-30P | n/a | n/a | - | - | 4 | 2000W, 120V | 66" | 1676 | 162 | 73.5 |
| PDHT4-208 | SPDHT4-208 | 14.4A | 6-20P | PDHT4-208-3 | SPDHT4-208-3 | 9.5A | 15-20P | 4 | 3000W, 208V | 66" | 1676 | 162 | 73.5 |
| PDHT4-240 | SPDHT4-240 | 12.5A | 6-20P | PDHT4-240-3 | SPDHT4-240-3 | 8.3A | 15-20P | 4 | 3000W, 240V | 66" | 1676 | 162 | 73.5 |
| PDHT5-208 * | SPDHT5-208 * | 18.0A | 6-30P | PDHT5-208-3 | SPDHT5-208-3 | 12.5A | 15-20P | 5 | 3750W, 208V | 81 1/2" | 2070 | 199 | 90.3 |
| PDHT5-240 * | SPDHT5-240 * | 15.6A | 6-30P | PDHT5-240-3 | SPDHT5-240-3 | 10.8A | 15-20P | 5 | 3750W, 240V | 81 1/2" | 2070 | 199 | 90.3 |

* All Three-Phase units and Single-Phase 5-well units available in 208V and 240V only.

Receptacle Configurations Required

See above chart for applicable NEMA plug.

| | | | | | |
|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|
| | | | | | |
| 15A 120V | 15A 240V | 20A 240V | 30A 240V | 30A 120V | 20A 3Ø 240V |
| furnished with NEMA 5-15 plug | furnished with NEMA 6-15 plug | furnished with NEMA 6-20 plug | furnished with NEMA 6-30 plug | furnished with NEMA 5-30 plug | furnished with NEMA 15-20 plug |

FLEX-MASTER® Overshelf Kits

Both kits include two 16/304 overshelves and four 30" (762mm) posts. Add suffix specified to order kit (**example: PDHT2-120-FMU**), or design your own using standard components from EG30.18.

| description | add suffix |
|--|------------|
| 10" (254mm) overshelves | -FM |
| 15" (381mm) overshelves, plus one ladle rack | -FMU |

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.

Printed in U.S.A.
 ©2015 by Eagle Group

Rev. 10/15