



Model: 28-114S Item #: \_\_\_\_\_ Date: \_\_\_\_\_

Project: \_\_\_\_\_ Qty: \_\_\_\_\_ Approved By: \_\_\_\_\_

# Adjustable 6" to 7" Height Universal Plate Casters


Casters



28-114S

## Standard Features

- Fits most manufacturers
- 6" to 7" height adjustment
- 3-1/2" x 3-1/2" plate
- 3" grease resistant wheels
- Total lock front brake prevents swivel and locks wheel in place
- 4 pieces per set
- Quantity per case: 12

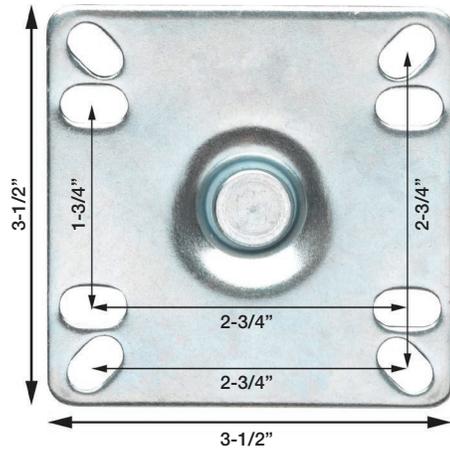

## Specifications

Hole Centers	Weight (Set of 4)	Load Capacity	Temp Range	Wheel Size	Overall Height
2-3/4" Outer 1-3/4" Inner	10 lbs.	220 lbs. per caster	14°F to 212°F	3" wheels with front brake	6" to 7" adjustable

## Installation

1. Loosen two allen screws on side of caster stem to allow for adjustment.

2. Hold base of caster stem and turn stem until raised to the desired height.

3. Tighten allen screws so wheel and swivel will be locked in place.



**NOTE:** Locking front brake will prevent lower section of caster from rotating as well as secure wheel in place