

Project:
Item Number:
Quantity:

SHORT SIDE NON-REFRIGERATED COLD PAN DROP-IN



Short Side Non-Refrigerated Cold Pan Drop-in

DESCRIPTION

The short side non-refrigerated cold pans are designed for top-mount installation.

A full-perimeter drip edge contains spills and condensation within the stainless steel countertop area of the drop-in.

High-density polyurethane foam insulation surrounds the exterior of the well to provide better temperature maintenance and hold ice longer.

The deep display well provides maximum capacity for ice, essential for optimum presentation and performance. The seamless well is designed for maximum capacity.

MODELS

36654 Two Pan (US/Canada) 36657 Three Pan (US/Canada) 36660 Four Pan (US/Canada)

FEATURES

- Top is 18-gauge stainless steel, 18-8 Type 304, with 3/8" (9.5 mm) overhang on all sides and die stamped with fullperimeter drip edge.
- Molded breaker gasket fitted under drip edge.
- ☐ Flat work surface around opening.
- Exterior housing is 18-gauge galvanized steel.
- ☐ Seamless well is 18-gauge 18-8 Type 304 stainless steel
- ☐ 1" (2.5 cm) integral drain.
- Inner well assembly is insulated with foamed in place polyurethane foam insulation.
- Positioning clips provided to center drop-in within cutout.
- Full one-year parts and labor warranty.

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

Approvals	Date

Agency Listings



Due to continued product improvement, please consult www.vollrathco.com for current product specifications.




SHORT SIDE NON-REFRIGERATED COLD PAN DROP-IN


MODELS


36654 Two Pan (US/Canada) Three Pan (US/Canada) 36657 36660 Four Pan (US/Canada)

DIMENSIONS

☐ Dimensions shown in inches (cm). Opening cutout must have a 7/8" (2.22 cm) corner radius.

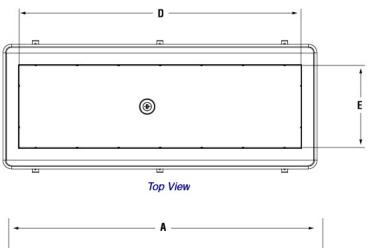



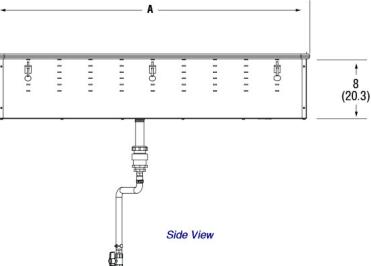

SPECIFICATIONS

	(A)	(B)	(C)	(D)	(E)	Cutout	
Item	Overall Length	Overall Width	Overall Height	Well Length	Well Width	Length	Width
36654	45 ⁷ / ₁₆ (115.4)	18 (45.7)	17 ¹⁵ / ₁₆ (45.6)	40¾ (103.5)	12 (30.5)	44¾ (113.7)	17¼ (44.2)
36657	66% (169.8)	18 (45.7)	17 ¹⁵ / ₁₆ (45.6)	61½ (156.2)	12 (30.5)	66¾16 (168.1)	17¼ (44.2)
36660	88¼ (224.2)	18 (45.7)	17 ¹⁵ / ₁₆ (45.6)	82¼ (208.9)	12 (30.5)	87% (222.6)	17¼ (44.2)



The Vollrath Company, L.L.C. 1236 North 18th Street Sheboygan, WI 53081-3201 U.S.A. Customer Service: 800.628.0830 Canada Customer Service: 800.695.8560 Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832 Technical Services Fax: 920.459.5462