

G3 GemX™ IntelliFresh® Coffee Brewer

with FreshTrac® Satellites



GEMXSIFT63A1000

G3 Gemini IntelliFresh Single Coffee Brewer
with FreshTrac Satellite



GEMXTIFT10A1000

G3 Gemini IntelliFresh Twin Coffee Brewer
with FreshTrac Satellites

GemX IntelliFresh® Brewer Features

G3 Digital Control – Easy-to-read true-green LED display. Scroll through navigation. Allows for precise fine-tuning of brewing process.

IntelliFresh Technology – Digitally controlled gentle pulses of heat maintains perfect coffee temperature.

Elegant Design – Adds major counter appeal.

Curtis Gold Cup Series® – Provides precise control over all aspects of brewing: time, temperature, volume, pre-infusion, pulse-brewing, and water bypass.

Pre-Set, One-Touch Global Recipes – Simplifies profile setting for gourmet results.

Locking Lid and Brew Cone – Ensures safety during brewing, prevents accidental spills.

Industry's Most Effective Mineral Tolerant Design – Patented fast-wetting AFS Sprayhead, Non-immersed water temperature sensor.

Encapsulated Control Board – Protects against steam, water and impact.

Field Selectable Brew Volume – 1/2, 1, or 1-1/2 gal. batch brewing.

Louvers in Back – Sleek side panels, maximizes counter space.

Fast-Flow Hot Water Faucet – For instant beverages, soups and other needs.

IF Satellite with FreshTrac® Features


Easy Maintenance – Smart, water-tolerant design.

Intuitive FreshTrac LED System – Communicates freshness and volume at a distance — no distracting alarms.

Satellite Bottom Sloping Design – Allows full evacuation. Easy to empty and clean.

User Selectable LED Colors – Green, White, Yellow or Red. Select "fresh" color and a 2nd color for "Quality Expired."


- **COLOR 1** – Flashes During Brew Cycle
- **COLOR 1** – Solid ON Indicates "Fresh"; programmable from 20 to 230 min.
- **COLOR 2** – Flashes to indicate "Quality Expired". Continuous for up to 18 hours.
- **SOLID BLUE** – Indicates volume after warmer is OFF; Warmer turns off automatically after 18 hours from start of brew cycle. No light indicates satellite is empty

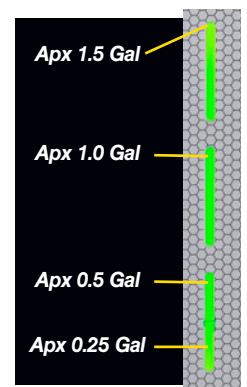

G3 GemX™ IntelliFresh® Coffee Brewer with FreshTrac® Satellites


GEMXSIFT63A1000

G3 Gemini IntelliFresh
Single Brewer
and FreshTrac Satellite

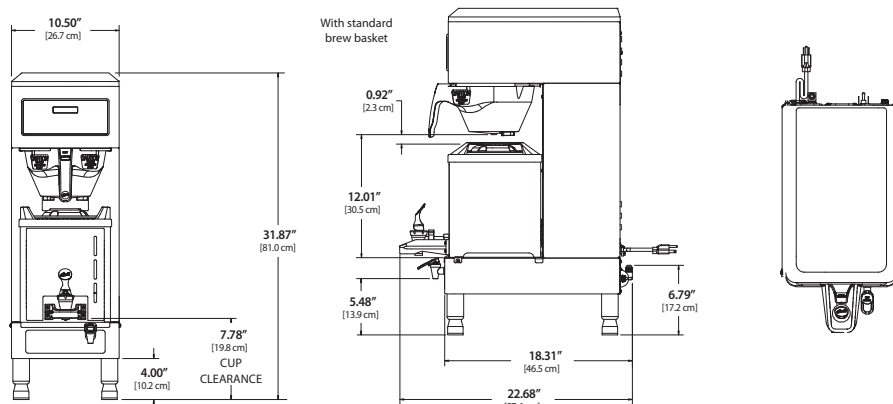

GEMXTIFT10A1000

G4 Gemini IntelliFresh
Twin Brewer
and FreshTrac Satellites

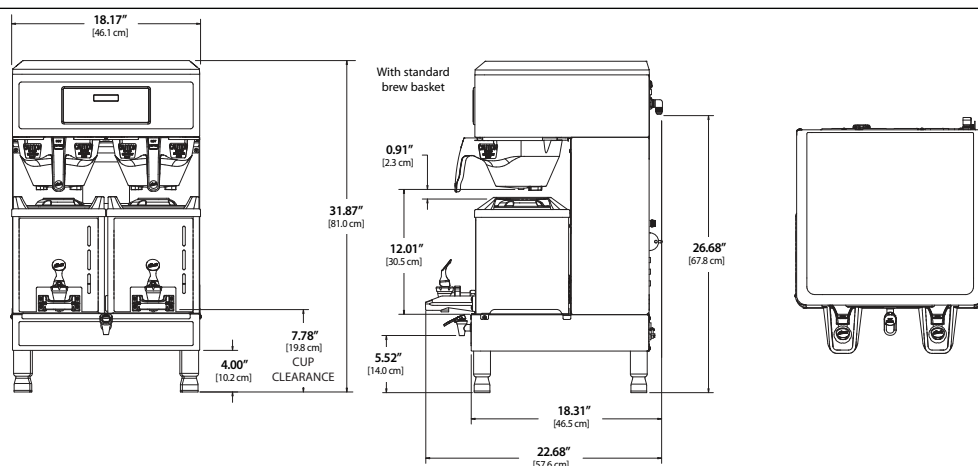

Specifications

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR
GEMXSIFT63A1000	Single, 1.5 Gallon with IntelliFresh, FreshTrac	31.87" x 10.50" x 22.68"	68.4 lbs.	4.5/10.0
GEMXTIFT10A1000	Twin, 1.5 Gallon with IntelliFresh, FreshTrac	31.87" x 18.17" x 22.68"	128.4 lbs.	15.0/21.0

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
GEMXSIFT63A1000	1 PH	120/220 V	13.5/13.5 A	15/20A	2 X 1600 W	2W/3W + G	1650/2800 W	50/60 Hz	3/8" flare	20 - 90 psi	1.0 gpm	2.2 gal.
GEMXTIFT10A1000	1 PH	220 V	23.0/34.0 A	30/50A	3 X 2500 W	3W + G	5100/7500 W	50/60 Hz	3/8" flare	20 - 90 psi	2.0 gpm	5.2 gal.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



GEM3XIFT



GEM5XSIFT



GEM5XTIFT

Dispenser & Warmer Stand Reference Guide

MODEL #	GEM3XIFT	GEM5XSIFT	GEM5XTIFT
GEMXSIFT63A1000	✓	✓	✓
GEMXTIFT10A1000	✓	✓	✓



Wilbur Curtis Co., Inc. / 6913 Acco Street / Montebello CA 90640
800.421.6150 / 323.837.2300 / www.wilburcurtis.com
Perfecting the art of brewing since 1941

MAR/2018 - F-5020 revNC