

# Avantco A-35R-HC 39 1/2" Solid Door Reach-In Refrigerator

Item #178A35RHC



## Technical Data

|                          |                 |
|--------------------------|-----------------|
| Width                    | 39 1/2 Inches   |
| Depth                    | 29 1/2 Inches   |
| Height                   | 82 1/2 Inches   |
| Interior Width           | 35 Inches       |
| Left Door Opening Width  | 15 3/8 Inches   |
| Right Door Opening Width | 15 3/8 Inches   |
| Shelf Width              | 16 15/16 Inches |
| Interior Depth           | 24 3/8 Inches   |
| Shelf Depth              | 21 1/4 Inches   |
| Interior Height          | 59 1/2 Inches   |

## Features

- Corrosion-resistant stainless steel exterior and aluminum interior with 304 stainless steel floor
- Features two self-closing and stay-open locking doors
- Includes 6 epoxy coated shelves with 88 lb. capacity each
- Digital temperature controller with automatic defrost function
- 115V; 3/7 hp; R-290 refrigerant


## Certifications



## Technical Data

|                      |                                 |
|----------------------|---------------------------------|
| Amps                 | 4.1 Amps                        |
| Hertz                | 60 Hz                           |
| Phase                | 1 Phase                         |
| Voltage              | 115 Volts                       |
| Wattage              | 385 Watts                       |
| Access Type          | Doors                           |
| BTU (LBP)            | 1093 BTU                        |
| Capacity             | 29.73 cu. ft.                   |
| Capacity (per Shelf) | 88 lb.                          |
| Caster Size          | 5 Inches                        |
| Casters              | With Casters                    |
| Color                | Silver                          |
| Compressor Location  | Bottom Mounted                  |
| Construction         | Stainless Steel and Aluminum    |
| Door Style           | Swing                           |
| Door Type            | Solid                           |
| Dutch Half Doors     | Without Dutch Half Doors        |
| Features             | Removable Magnetic Door Gaskets |
| Handle Material      | Plastic                         |
| Hinge Location       | Left<br>Right                   |
| Horsepower           | 3/7 hp                          |
| Installation Type    | Freestanding                    |
| Number of Doors      | 2 Doors                         |
| Number of Shelves    | 6 Shelves                       |
| Plug Type            | NEMA 5-15P                      |
| Refrigerant Capacity | 3 oz.                           |
| Refrigerant Type     | R-290                           |
| Sections             | 2 Sections                      |
| Starting Amps        | 12.3 Amps                       |
| Starting Wattage     | 1155 Watts                      |
| Temperature Range    | 33 - 40 Degrees F               |
| Type                 | Refrigerators                   |

## Plan View

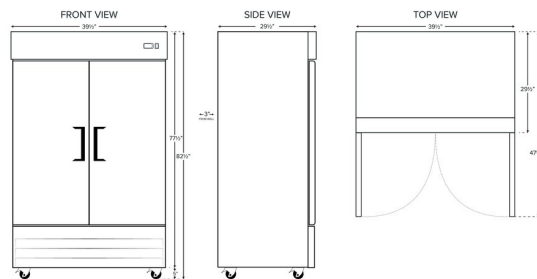



## Notes & Details

Your establishment relies on refrigeration for proper food safety, and you will receive performance you can depend on with this Avantco A-35R-HC 39 1/2" solid door refrigerator! A painted aluminum interior with a 304 stainless steel floor gives you increased durability, while stainless steel doors and exterior sides give it a sleek appearance. For convenience, six epoxy-coated shelves, which hold up to 88 lb. each, feature shelf clips for customization when desired.

Designed to maintain temperatures between 33-40 degrees Fahrenheit, this fridge boasts a bottom-mounted 3/7 hp compressor that uses R-290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. It also opens up the top of your unit for additional storage space, if necessary. For optimal temperature retention, the entire cabinet utilizes foamed-in-place polyurethane insulation. Other helpful features include the stay-open locking door mechanism, automatic defrosting, 5" casters, and digital temperature control. This item requires a 115V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).