

Item #: 178SSUC60FHC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco SS-UC-60F-HC 60" Undercounter Freezer

Item #178SSUC60FHC



Technical Data

Width	60 1/4 Inches
Depth	29 1/2 Inches
Height	35 1/4 Inches
Power Cord Length	84 Inches
Interior Width	55 5/8 Inches
Left Door Opening Width	25 11/16 Inches
Right Door Opening Width	25 11/16 Inches
Shelf Width	27 1/4 Inches
Interior Depth	22 7/8 Inches
Shelf Depth	17 Inches

Features

- Strong and sleek type 430 stainless steel exterior
- Type 304 stainless steel interior maintains temperatures from -8 to -1 degrees Fahrenheit
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller
- 115V; 2/3 hp

Certifications



ETL, US



5-15P




ETL Sanitation

Technical Data

Interior Height	23 1/2 Inches
Work Surface Height	35 1/4 Inches
Amps	4.5 Amps
Hertz	60 Hz
Phase	1 Phase
Voltage	115 Volts
Wattage	345 Watts
Access Type	Doors
BTU (LBP)	1692 BTU
Capacity	14.2 cu. ft.
Capacity (per Shelf)	88 lb.
Compressor Location	Rear Mounted
Compressor Style	Side / Rear Breathing
Door Style	Swing
Door Type	Solid
Features	Removable Magnetic Door Gaskets
Hinge Location	Left Right
Horsepower	3/5 hp
Number of Doors	2 Doors
Number of Shelves	2 Shelves
Plug Type	NEMA 5-15P
Refrigerant Capacity	3.9 oz.
Refrigerant Type	R-290
Starting Amps	13.5 Amps
Starting Wattage	1035 Watts
Style	Counter Height
Temperature Range	-8 - -1 Degrees F
Top Capacity	441 lb.
Type	Freezers Undercounter Freezers

Plan View

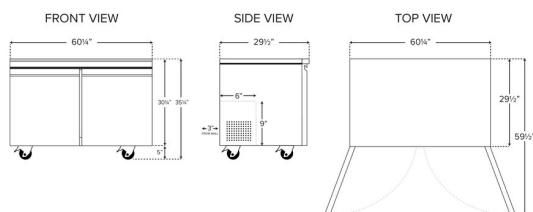

178SSUC60PHC

Notes & Details

Make cold food storage as convenient as possible with the Avantco 60" undercounter freezer. With a spacious refrigerated portion readily accessible through its two doors, the unit opens up to two shelves to help you organize your ingredients and best utilize the 14.2 cu. ft. interior. Plus, because they each accommodate up to 88 lb., the epoxy-coated steel shelves are well equipped for holding heavy bulk ingredients, from dozens of eggs to jars of condiments and sauces.

This unit is designed for outstanding durability to ensure that it withstands tough, busy kitchen environments with ease. It features a 430 type stainless steel exterior, which provides both strength and a smooth, sleek appearance. The interior, made with 304 type stainless steel, also offers the durability necessary for heavy, regular use. Because of its undercounter design, the unit effortlessly adds frozen storage space without requiring space devoted solely to its footprint.

This freezer ensures optimal performance by operating with a 2/3 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from -8 to -1 degree Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps to maintain internal temperatures and adds rigidity to the body's structure.

Operation of the freezer is easy, thanks to its special features. Monitor it by consulting the interior wall-mounted thermometer, and use the auto-defrost feature on the pre-programmed digital controller to maintain the freezer in tip-top shape. 2 1/2" casters make moving simple for easy cleaning and bring the unit to an ADA-compliant working height. This undercounter unit requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.