

Item #: 178SSUD260R Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco SS-UD-2-60R 60" Stainless Steel Extra Deep Undercounter Refrigerator

Item #178SSUD260R



Technical Data

| | |
|--------------------------|----------------|
| Width | 60 Inches |
| Depth | 31 1/2 Inches |
| Height | 34 7/16 Inches |
| Interior Width | 39 3/4 Inches |
| Left Door Opening Width | 14 3/16 Inches |
| Right Door Opening Width | 22 1/16 Inches |
| Interior Depth | 26 3/16 Inches |
| Interior Height | 22 7/8 Inches |
| Work Surface Height | 35 1/4 Inches |
| Amps | 5.1 Amps |

Features

- Strong and sleek type 430 stainless steel exterior with type 304 stainless steel interior
- Side mounted compressor and digital temperature controller allow for greater depth of storage
- Cabinet section can accept full size bun pans
- Two epoxy-coated steel shelves accommodate up to 88 lb. each
- 115V; 2/5 hp

Certifications



ETL, US



ETL Sanitation




5-15P

Technical Data

| | |
|----------------------|---|
| Hertz | 60 Hz |
| Phase | 1 Phase |
| Voltage | 115 Volts |
| Wattage | 439 Watts |
| Access Type | Doors |
| BTU (LBP) | 974 BTU |
| Capacity | 13.1 cu. ft. |
| Capacity (per Shelf) | 88 lb. |
| Compressor Location | Side Mounted |
| Door Style | Swing |
| Door Type | Solid |
| Features | Removable Magnetic Door Gaskets |
| Horsepower | 2/5 hp |
| Number of Doors | 2 Doors |
| Number of Shelves | 2 Shelves |
| Plug Type | NEMA 5-15P |
| Refrigerant Capacity | 3.5 oz. |
| Refrigerant Type | R-290 |
| Sections | 2 Sections |
| Starting Amps | 15.3 Amps |
| Starting Wattage | 1317 Watts |
| Temperature Range | 33 - 40 Degrees F |
| Top Capacity | 353 lb. |
| Type | Refrigerators Undercounter Refrigerators |

Plan View

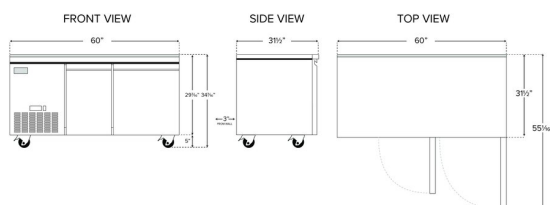

178SSUD260R



Notes & Details

Make cold food storage as convenient as possible with the Avantco SS-UD-2-60R 60" extra deep undercounter refrigerator. With a spacious refrigerated portion readily accessible through its two doors, the unit opens up to two shelves to help you organize your ingredients and best utilize the 13.1 cu. ft. interior. Plus, because they each accommodate up to 88 lb., the epoxy-coated steel shelves are well equipped for holding heavy bulk ingredients, from dozens of eggs to jars of condiments and sauces.

This unit is designed for outstanding durability to ensure that it withstands tough, busy kitchen environments with ease. It features a 430 type stainless steel exterior, which provides both strength and a smooth, sleek appearance. The interior, made with 304 type stainless steel, also offers the durability necessary for heavy, regular use. Because of its undercounter design, the unit effortlessly adds refrigerated storage space without requiring space devoted solely to its footprint.

This refrigerator ensures optimal performance by operating with a 2/5 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps to trap in the cold air and to prevent the ambient air from entering. This ensures that all food held in the unit remains at food safe temperatures and ready for preparation or direct service to customers. The side-mounted compressor allows for greater depth of storage over rear-mounted units.

Operation of the refrigerator is easy, thanks to its special features. Monitor it by consulting the interior wall-mounted thermometer, and use the auto-defrost feature on the pre-programmed digital controller to maintain the refrigerator in tip-top shape. At the end of the day, take advantage of the casters and roll the unit aside to thoroughly clean the area. This undercounter unit requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.