

Item #: 178SSUD2RD Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco SS-UD-2RD 67" Stainless Steel Extra Deep Undercounter Refrigerator with 2 Left Drawers and 1 Door

Item #178SSUD2RD



### Technical Data

Width	67 15/16 Inches
Depth	31 1/2 Inches
Height	34 7/16 Inches
Power Cord Length	98 Inches
Interior Width	47 11/16 Inches
Packaging Width	70 11/16 Inches
Shelf Width	23.149999618530273 Inches
Interior Depth	26 3/16 Inches
Packaging Depth	34 1/4 Inches
Shelf Depth	24 2/5 Inches

### Features

- Strong and sleek type 430 stainless steel exterior with type 304 stainless steel interior
- Side mounted compressor and digital temperature controller allow for greater depth of storage
- Cabinet section can accept full size bun pans
- Includes 2 left-side drawers and 6 assorted divider bars to fit full size and fractional pans
- 115V; 2/5 hp
- Note: only the undercounter refrigerator holds the ETL certification

### Certifications



ETL Sanitation



5-15P




ETL, US



## Technical Data

Interior Height	22 7/8 Inches
Packaging Height	36 1/4 Inches
Work Surface Height	35 1/4 Inches
Amps	5.1 Amps
Hertz	60 Hz
Phase	1 Phase
Voltage	115 Volts
Wattage	439 Watts
Access Type	Doors and Drawers
BTU (LBP)	631 BTU
Capacity	16.4 cu. ft.
Capacity (per Shelf)	90 lb.
Compressor Style	Side / Rear Breathing
Door Style	Swing
Door Type	Solid
Features	Automatic Electric Defrost Digital Temperature Controller Removable Magnetic Door Gaskets Removable Magnetic Drawer Gaskets Self-Closing Doors Stay-Open Doors
Hinge Location	Right
Horsepower	2/5 hp
Insulation Material	Polyurethane Foam
Material	Stainless Steel
Maximum Ambient Temperature	90 Degrees F
Net Weight	243 lb.
Number of Doors	1 Doors
Number of Drawers	2 Drawers
Number of Shelves	1 Shelf
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Starting Amps	15.3 Amps
Starting Wattage	1317 Watts
Style	Counter Height
Temperature Range	33 - 40 Degrees F
Top Capacity	353 lb.
Type	Refrigerators Undercounter Refrigerators

## Plan View

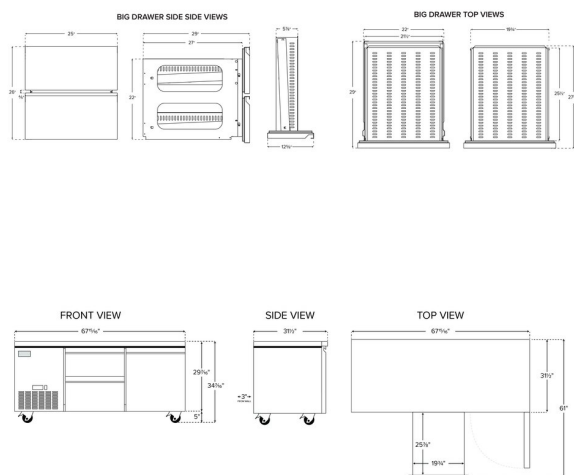

178SSUD2RD

## Notes & Details

Make cold food storage as convenient as possible with the Avantco SS-UD-2RD 67" extra deep undercounter refrigerator. With a spacious refrigerated portion readily accessible through 2 drawers on the left and a door on the right, the 16.4 cu. ft. unit helps you organize your ingredients. While the door section features an epoxy-coated shelf, the drawers include a total of 6 assorted divider bars. These fit in the drawers where they act as braces for full size or fractional pans. Easily reconfigure or remove the braces to best suit your inventory. Drawers provide excellent organization for your food pans and can help maximize your kitchen's workflow. Drawers also allow you to quickly pull ingredients for faster operation and ease of use.

This unit is designed for outstanding durability to ensure that it withstands tough, busy kitchen environments with ease. It features a 430 type stainless steel exterior, which provides both strength and a smooth, sleek appearance. The interior, made with 304 type stainless steel, also offers the durability necessary for heavy, regular use. Because of its undercounter design, the unit effortlessly adds refrigerated storage space without requiring space devoted solely to its footprint.

This refrigerator ensures optimal performance by operating with a 2/5 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps to trap in the cold air and to prevent the ambient air from entering. This ensures that all food held in the unit remains at food safe temperatures and ready for preparation or direct service to customers. The side-mounted compressor allows for greater depth of storage over rear-mounted units.

Operation of the refrigerator is easy, thanks to its special features. Monitor it by consulting the interior wall-mounted thermometer, and use the auto-defrost feature on the pre-programmed digital controller to maintain the refrigerator in tip-top shape. At the end of the day, take advantage of the casters and roll the unit aside to thoroughly clean the area. This undercounter unit requires a 115V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).