

Item #: 178UDD1S3 Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco UDD-1-HC-S Triple Tap Kegerator Beer Dispenser - Stainless Steel, (1) 1/2 Keg Capacity

Item #178UDD1S3



Technical Data

Width	23 1/2 Inches
Depth	30 1/4 Inches
Height	39 3/4 Inches
Power Cord Length	108 Inches
Interior Width	19 1/2 Inches
Interior Depth	18 1/8 Inches
Nominal Depth	Standard
Faucet Height	10 1/4 Inches
Interior Height	28 5/8 Inches
Tap Tower Height	16 Inches

Features

- Durable and attractive stainless steel exterior
- (1) 3-tap tower with a 10 1/4" faucet height
- Digital controls for easy-to-read temperature display
- Includes (3) "D" system keg couplers and keg mats
- 115V; 1/4 hp compressor; R290 refrigerant
- Note: only the kegerator holds the ETL certification

Certifications



ETL, US



5-15P




ETL Sanitation

Technical Data

Tap Tower Diameter	3 Inches
Amps	1.9 Amps
Hertz	60 Hz
Phase	1 Phase
Voltage	115 Volts
Wattage	216 Watts
Capacity	7.8 cu. ft.
Casters	With Casters
Compressor Location	Rear Mounted
Door Type	Solid
Exterior Finish	Stainless Steel
Features	Removable Magnetic Door Gaskets
Horsepower	1/4 hp
Number of Doors	1 Doors
Number of Kegs	1 Keg
Number of Taps	3 Taps
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Starting Amps	5.8 Amps
Starting Wattage	648 Watts
Style	1/2 Barrel
Top Capacity	176 lb.
Type	Kegeators / Beer Dispensers

Plan View

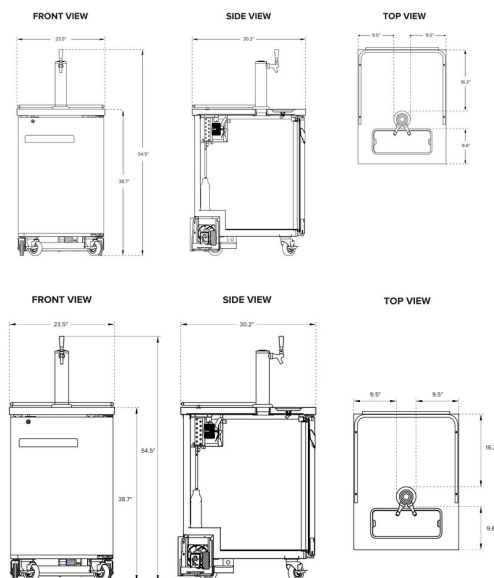



Notes & Details

Whether you operate a pub, banquet hall, catering service, or facilitate other special events, this Avantco UDD-2-HC-S beer dispenser is an excellent way to offer crisp, refreshing draft beer to your guests without investing in a complex built-in tap system! This unit features a 2 tap tower with a 10 1/4" faucet height that allows you to easily fill pint glasses and pitchers with local microbrews, international macrobrews, and everything in between. It holds (2) 1/2 kegs so you can stock up on one brew or offer customers a selection to choose from, and it even comes with 2 shelves for optional bottle or can storage while concealing the product behind 2 solid doors. The doors themselves are not only self-closing to prevent potential energy loss, but also lock to prevent theft during off hours. This unit is equipped with knockout plugs to install external CO2 lines.

Unlike many competitive beer dispensers, this model ships with "D" system couplers. It features a sleek stainless steel exterior and a 304 type stainless steel interior that is both durable and easy to clean, while a built-in drip tray further expedites end-of-day cleaning. It has a 1/4 hp refrigeration system that circulates R290 hydrocarbon refrigerant. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3, making it an energy-efficient choice for your business. A 115V electrical connection is required for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.