



Item #: 178UDD3HC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco UDD-3-HC Black Kegerator / Beer Dispenser with (2) 2 Tap Towers - (3) 1/2 Keg Capacity

Item #178UDD3HC



Technical Data

| | |
|--------------------------|---------------|
| Width | 69 1/8 Inches |
| Depth | 27 3/4 Inches |
| Height | 35 5/8 Inches |
| Power Cord Length | 108 Inches |
| Interior Width | 56 1/2 Inches |
| Left Door Opening Width | 21 1/2 Inches |
| Packaging Width | 71 1/2 Inches |
| Right Door Opening Width | 21 1/2 Inches |
| Shelf Width | 27 3/4 Inches |
| Interior Depth | 21 1/2 Inches |

Features

- 3 shelves included for optional bottle and can storage for increased versatility
- 2 self-closing, locking doors to protect inventory
- LED interior lighting
- Includes (4) "D" system couplers
- 115V; 3/7 hp; R290 refrigerant

Certifications



5-15P



ETL, US




ETL Sanitation

Avantco Refrigeration

Technical Data

| | |
|--------------------------|---|
| Nominal Depth | Standard |
| Packaging Depth | 30 1/2 Inches |
| Shelf Depth | 21 1/2 Inches |
| Faucet Height | 10 1/4 Inches |
| Interior Height | 30 1/2 Inches |
| Packaging Height | 41 3/4 Inches |
| Tap Tower Height | 16 Inches |
| Tap Tower Diameter | 3 Inches |
| Amps | 3.5 Amps |
| Hertz | 60 Hz |
| Phase | 1 Phase |
| Voltage | 115 Volts |
| Wattage | 325 Watts |
| BTU (LBP) | 974 BTU |
| Capacity | (3) 1/2 Kegs |
| Capacity (per Shelf) | 88 lb. |
| Compressor Location | Left Side Mounted |
| Door Type | Solid |
| Exterior Finish | Black |
| Features | Automatic Electric Defrost Digital Temperature Controller LED Lighting Magnetic Door Gaskets |
| Horsepower | 3/7 hp |
| Insulation Material | Polyurethane Foam |
| Material | Black Coated Steel / Stainless Steel |
| Net Volume | 23 2/5 cu. ft. |
| Net Weight | 298 lb. |
| Number of 12 oz. Bottles | 352 Bottles |
| Number of 12 oz. Cans | 320 Cans |
| Number of Doors | 2 Doors |
| Number of Kegs | 3 Kegs |
| Number of Shelves | 3 Shelves |
| Number of Taps | 4 Taps |
| Plug Type | NEMA 5-15P |
| Refrigerant Capacity | 2.5 oz. |
| Refrigerant Type | R-290 |
| Shelf Material | Epoxy-Coated Steel |
| Starting Amps | 10.5 Amps |
| Starting Wattage | 975 Watts |
| Style | 1/2 Barrel |
| Temperature Range | 33 - 40 Degrees F |
| Top Capacity | 353 lb. |
| Type | Kegeators / Beer Dispensers |

Plan View

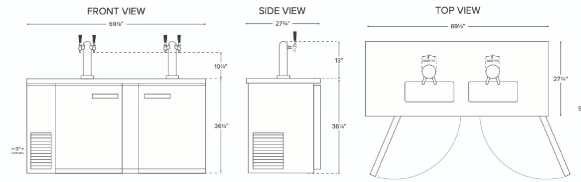

Notes & Details

Whether you operate a pub, banquet hall, catering service, or facilitate other special events, this Avantco UDD-3-HC beer dispenser is an excellent way to offer crisp, refreshing draft beer to your guests without investing in a complex built-in tap system! This unit features two 2 tap towers with a 10 1/4" faucet height that allows you to easily fill pint glasses and pitchers with local microbrews, international macrobrews, and everything in between. It holds (3) 1/2 kegs so you can stock up on one brew or offer customers a selection to choose from, and it even comes with 3 shelves for optional bottle or can storage while concealing the product behind 2 solid doors. The doors themselves are not only self-closing to prevent potential energy loss, but also lock to prevent theft during off hours. This unit is equipped with knockout plugs to install external CO2 lines.

Unlike many competitive beer dispensers, this model ships with "D" system couplers so that you can tap kegs right out of the box! This commercial kegerator features a black coated steel exterior and a 304 type stainless steel interior that is both durable and easy to clean, while a built-in drip tray further expedites end-of-day cleaning. It has a 3/7 hp refrigeration system that circulates R290 hydrocarbon refrigerant. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3, making it an energy-efficient choice for your business. A 115V electrical connection is required for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.