

Item #: 178UDD48HCS Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco UDD-48-HC-S Double Tap Kegerator Beer Dispenser -Stainless Steel, (2) 1/2 Keg Capacity

Item #178UDD48HCS



Technical Data

Width	48 3/4 Inches
Depth	24 7/16 Inches
Height	36 5/8 Inches
Power Cord Length	108 Inches
Interior Width	36 1/4 Inches
Left Door Opening Width	16 7/16 Inches
Packaging Width	51 1/4 Inches
Right Door Opening Width	16 7/16 Inches
Shelf Width	17 5/8 Inches
Interior Depth	18 1/2 Inches

Features

- 2 shelves included for optional bottle and can storage for increased versatility
- Digital controls for easy-to-read temperature display
- LED interior lighting
- Includes (2) "D" system keg couplers
- 115V; 3/7 hp; R290 refrigerant

Certifications



ETL Sanitation



ETL, US




5-15P

Technical Data

Nominal Depth	Narrow
Packaging Depth	27 1/2 Inches
Shelf Depth	18 1/8 Inches
Faucet Height	10 1/4 Inches
Interior Height	28 7/8 Inches
Packaging Height	41 3/4 Inches
Tap Tower Height	16 Inches
Tap Tower Diameter	3 Inches
Amps	3.5 Amps
Hertz	60 Hz
Phase	1 Phase
Voltage	115 Volts
Wattage	325 Watts
BTU (LBP)	974 BTU
Capacity	(2) 1/2 Kegs
Capacity (per Shelf)	88 lb.
Compressor Location	Left Side Mounted
Door Type	Solid
Exterior Finish	Stainless Steel
Features	Automatic Electric Defrost Digital Temperature Controller LED Lighting Removable Magnetic Door Gaskets
Horsepower	3/7 hp
Insulation Material	Polyurethane Foam
Material	Stainless Steel
Net Volume	13 cu. ft.
Net Weight	231 lb.
Number of 12 oz. Bottles	196 Bottles
Number of 12 oz. Cans	144 Cans
Number of Doors	2 Doors
Number of Kegs	2 Kegs
Number of Shelves	2 Shelves
Number of Taps	2 Taps
Plug Type	NEMA 5-15P
Refrigerant Capacity	2.5 oz.
Refrigerant Type	R-290
Shelf Material	Epoxy-Coated Steel
Starting Amps	10.5 Amps
Starting Wattage	975 Watts
Style	1/2 Barrel
Temperature Range	33 - 40 Degrees F
Top Capacity	353 lb.
Type	Kegeators / Beer Dispensers

Plan View

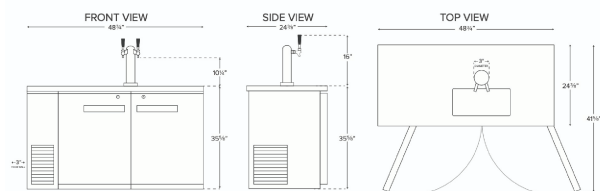

Notes & Details

Whether you operate a pub, banquet hall, catering service, or facilitate other special events, this Avantco UDD-48-HC-S four tap beer dispenser is an excellent way to offer crisp, refreshing draft beer to your guests without investing in a complex built-in tap system! This unit features a four tap tower with a 10 1/4" faucet height that allows you to easily fill pint glasses and pitchers with local microbrews, international macrobrews, and everything in between. It holds (2) 1/2 kegs so you can stock up on one brew or offer customers a selection to choose from, and it even comes with 2 shelves for optional bottle or can storage while concealing the product behind 2 solid doors. The doors themselves are not only self-closing to prevent potential energy loss, but also lock to prevent theft during off hours. This unit is equipped with knockout plugs to install external CO2 lines.

Unlike many competitive beer dispensers, this model ships with 2 couplers so that you can tap kegs right out of the box. It features a sleek stainless steel exterior and a 304 type stainless steel interior that is both durable and easy to clean, while a built-in drip tray further expedites end-of-day cleaning. It has a 3/7 hp refrigeration system that circulates R290 hydrocarbon refrigerant. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3, making it an energy-efficient choice for your business. A 115V electrical connection is required for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.