

Item #: 178UDD4S8 Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco UDD-4-HC-S (2) Four Tap Kegerator Beer Dispenser - Stainless Steel, (3) 1/2 Keg Capacity

Item #178UDD4S8



### Technical Data

|                   |               |
|-------------------|---------------|
| Width             | 90 1/4 Inches |
| Depth             | 27 3/4 Inches |
| Height            | 35 5/8 Inches |
| Power Cord Length | 108 Inches    |
| Interior Width    | 77 3/4 Inches |
| Interior Depth    | 21 7/8 Inches |
| Nominal Depth     | Standard      |
| Faucet Height     | 10 1/4 Inches |
| Interior Height   | 30 1/2 Inches |
| Tap Tower Height  | 16 Inches     |

### Features

- 4 shelves included for optional bottle and can storage for increased versatility
- (2) 4-tap towers with a 10 1/4" faucet height
- Energy efficient LED interior lighting
- Includes (8) "u0022D"u0022 system couplers and keg mats
- 115V; 1/4 hp compressor; R290 refrigerant

### Certifications



ETL, US



5-15P




ETL Sanitation

## Technical Data

|                     |                                                 |
|---------------------|-------------------------------------------------|
| Tap Tower Diameter  | 3 Inches                                        |
| Amps                | 4.1 Amps                                        |
| Voltage             | 115 Volts                                       |
| Wattage             | 385 Watts                                       |
| Capacity            | (3) 1/2 Kegs                                    |
| Compressor Location | Left Side Mounted                               |
| Door Type           | Solid                                           |
| Exterior Finish     | Stainless Steel                                 |
| Features            | LED Lighting<br>Removable Magnetic Door Gaskets |
| Horsepower          | 1/4 hp                                          |
| Number of Doors     | 3 Doors                                         |
| Number of Kegs      | 3 Kegs                                          |
| Number of Shelves   | 4 Shelves                                       |
| Number of Taps      | 8+ Taps                                         |
| Plug Type           | NEMA 5-15P                                      |
| Refrigerant Type    | R-290                                           |
| Starting Amps       | 12.3 Amps                                       |
| Starting Wattage    | 1155 Watts                                      |
| Style               | 1/2 Barrel                                      |
| Top Capacity        | 353 lb.                                         |
| Type                | Kegeators / Beer Dispensers                     |

## Plan View

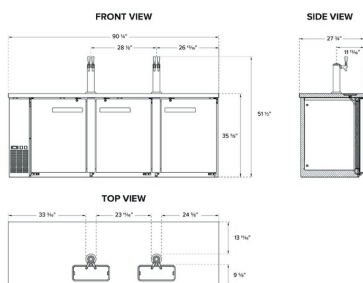

## Notes & Details

Whether you operate a pub, banquet hall, catering service, or facilitate other special events, this Avantco UDD-60-HC-S (2) triple tap beer dispenser is an excellent way to offer crisp, refreshing draft beer to your guests without investing in a complex built-in tap system! This unit features (2) triple tap towers with a 10 1/4" faucet height that allows you to easily fill pint glasses and pitchers with local microbrews, international macrobrews, and everything in between. It holds (3) 1/2 kegs so you can stock up on one brew or offer customers a selection to choose from, and it even comes with (2) 18 1/8" x 23 5/8" shelves for optional bottle or can storage while concealing the product behind 2 solid doors. The doors themselves are not only self-closing to prevent potential energy loss, but also lock to prevent theft during off hours. This unit is equipped with knockout plugs to install external CO2 lines.

Unlike many competitive beer dispensers, this model ships with 8 couplers so that you can tap kegs right out of the box! This commercial kegeator features a sleek stainless steel finish and a 1 1/2" thick stainless steel top that is both durable and extremely simple to clean, while a built-in drip tray further expedites end-of-day cleaning. It has a 1/4 hp refrigeration system that circulates R-290 hydrocarbon refrigerant. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. A 115V electrical connection is required for operation. For long-lasting quality assurance and peace of mind, this unit also comes with a 2 year Parts and Labor Warranty.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).