



Item #: 178Z2RWMS Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

# Avantco Z2-R-WMS 54" VersaHub WiFi-Enabled Solid Door Stainless Steel Reach-In Refrigerator

Item #178Z2RWMS



## Technical Data

Width	54 Inches
Depth	32 3/16 Inches
Height	81 11/16 Inches
Interior Width	49 3/8 Inches
Interior Depth	27 1/8 Inches
Interior Height	56 11/16 Inches
Amps	4.2 Amps
Hertz	60 Hz
Phase	1 Phase
Voltage	115 Volts

## Features

- VersaHub platform monitors unit failure, open doors, and temperature via text/email notifications
- Corrosion-resistant stainless steel interior and exterior
- Versatile shelf supports are 33% stronger than standard shelf clips and can hold full-size food pans
- Rear air duct for exceptional circulation
- R-290 refrigerant; 115V; 1/2 hp
- Note: only the refrigerator holds the ETL certification

## Certifications



ETL Sanitation



Energy Star Qualified



ETL, US




5-15P

Avantco Refrigeration

## Technical Data

Wattage	456 Watts
Access Type	Doors
Capacity	43.93 cu. ft.
Capacity (per Shelf)	120 lb.
Casters	With Casters
Color	Silver
Compressor Location	Top Mounted
Construction	All Stainless Steel
Door Style	Swing
Door Type	Solid
Dutch Half Doors	Without Dutch Half Doors
Features	Automatic Electric Defrost Digital Display Electronic Controller Energy Star Qualified Removable Magnetic Door Gaskets Self-Closing Doors VersaHub Compatible WiFi Enabled
Hinge Location	Left Right
Horsepower	1/2 hp
Installation Type	Freestanding
Number of Compressors	1 Compressor
Number of Doors	2 Doors
Number of Shelves	6 Shelves
Number of Tray Slides	6
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Sections	2 Sections
Starting Amps	12.6 Amps
Starting Wattage	1368 Watts
Temperature Range	33 - 40 Degrees F
Type	Refrigerators
WiFi	802.11n/ac 2.4GHz

## Plan View

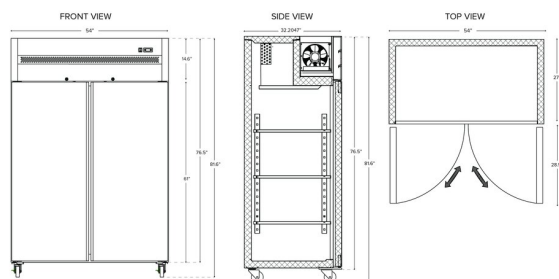



## Notes & Details

Your establishment relies on refrigeration for proper food safety, and with this Avantco Z2-R-WMS 54" VersaHub WiFi-Enabled solid door stainless steel reach-in refrigerator, you receive performance you can depend on! A corrosion-resistant, all-stainless steel interior and exterior construction provides increased durability and a sleek appearance. This model uses the VersaHub platform to provide live notifications, history, and other WiFi-enabled updates. The self-closing and stay-open locking solid doors give your staff the ability to more quickly and easily load your refrigerator when you get a delivery. Plus, a door open alarm alerts users to when the doors have been open for too long to keep your inventory safe and fresh.

This model features 6 plastic-coated steel shelves that fit in the refrigerator's pan slides. These slides fit full-size food pans (sold separately) and hold 33% more weight than shelf clips to make loading and unloading a breeze! The full-length U-shaped door handles further expedite the loading process. Thanks to the rear air duct, this model has exceptional air circulation. Included casters allow users to easily move and clean under the unit.

Designed to maintain temperatures from 33-40 degrees Fahrenheit, this refrigerator boasts a top-mounted 1/2 hp compressor that uses R-290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the top-mounted compressor is further from the floor than on a bottom-mounted unit; meaning it'll get less dirty and won't be accidentally kicked. For optimal temperature retention, the entire cabinet is foamed-in place using polyurethane insulation. Other helpful features include the state-of-the-art Carel iJ controller, automatic defrosting, and digital temperature control with digital display. This item requires a 115V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).