



Item #: 447AP49R Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco A Plus AP-49R 55 3/8" Stainless Steel Solid Door Reach-In Refrigerator

Item #447AP49R



### Technical Data

|                     |               |
|---------------------|---------------|
| Width               | 55 3/8 Inches |
| Depth               | 31 1/8 Inches |
| Height              | 84 5/8 Inches |
| Power Cord Length   | 120 Inches    |
| Door Opening Width  | 22 1/2 Inches |
| Interior Width      | 50 1/4 Inches |
| Shelf Width         | 24 5/8 Inches |
| Interior Depth      | 26 1/2 Inches |
| Shelf Depth         | 22 1/2 Inches |
| Height with Casters | 84 3/4 Inches |

### Features

- Made in North America
- Type 430 stainless steel exterior with a type 201 interior; self-closing, stay-open, locking doors
- Digital control and automatic defrost; eco-mode to save energy and extend compressor life
- Includes 6 epoxy-coated adjustable shelves with an 80 lb. capacity each
- 115V, 1/3 hp, R-290 refrigerant

### Certifications



Imported from Mexico



ETL Sanitation




5-15P

Avantco Refrigeration

## Technical Data

|                       |                          |
|-----------------------|--------------------------|
| Interior Height       | 56 1/4 Inches            |
| Amps                  | 3 Amps                   |
| Hertz                 | 60 Hz                    |
| Phase                 | 1 Phase                  |
| Voltage               | 115 Volts                |
| Access Type           | Doors                    |
| Capacity              | 49 cu. ft.               |
| Capacity (per Shelf)  | 80 lb.                   |
| Casters               | With Casters             |
| Color                 | Silver                   |
| Compressor Location   | Bottom Mounted           |
| Construction          | All Stainless Steel      |
| Door Style            | Swing                    |
| Door Type             | Solid                    |
| Dutch Half Doors      | Without Dutch Half Doors |
| Features              | Self-Closing Doors       |
| Handle Material       | Stainless Steel          |
| Hinge Location        | Left / Right             |
| Horsepower            | 1/3 hp                   |
| Installation Type     | Freestanding             |
| Number of Compressors | 1 Compressor             |
| Number of Doors       | 2 Doors                  |
| Number of Shelves     | 6 Shelves                |
| Plug Type             | NEMA 5-15P               |
| Refrigerant Type      | R-290                    |
| Sections              | 2 Sections               |
| Temperature Range     | 32 - 38 Degrees F        |
| Type                  | Refrigerators            |

## Plan View

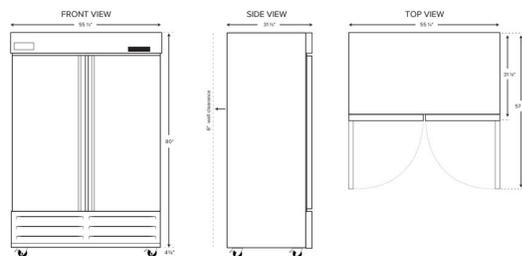



## Notes & Details

Made in North America, this Avantco A Plus AP-49R 55 3/8" solid door refrigerator gives your establishment the performance you need and rely on for proper food safety! Designed to suit a commercial environment, this refrigerator features a durable type 430 stainless steel exterior and a type 201 stainless steel interior for corrosion-resistance and easy cleaning.

Equipped with Avantco's A-Plus Eco Mode, this unit can automatically detect door openings and will enter a power-saving cycle in off hours. This system will reduce your energy cost without sacrificing consistent product temperature! This digital controller lets you set and adjust your refrigerator as needed, plus the automatic defrost helps to minimize maintenance.

For convenience, 6 epoxy coated shelves can be easily adjusted inside the cabinet to meet your unique storage needs. Each shelf can hold up to 80 lb. for storing heavy loads of pre-made foods or ingredients. For optimal temperature retention, the entire cabinet is insulated. This refrigerator also comes with casters so that you can easily move it for easy cleaning and maintenance.

For easy access to your refrigerator, this unit comes with two solid doors with both stay-open and self-closing closing features for the convenience of your employees. Plus, the doors can be locked to protect your stock overnight or during off hours.

Designed to maintain temperatures from 32 to 38 degree Fahrenheit, this refrigerator boasts a 1/3 hp compressor that uses R-290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. This item requires a 115V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).