

MobiLift®

BX & BXB MOBILE LIFT TABLES

Bishamon®



Bishamon MobiLift™ scissor lift tables are rugged industrial lift tables with push-bars and casters. BX Series lift tables provide improved ergonomics by placing the load at a convenient work height while providing the mobility to locate the lift where it is needed.

MobiLift™ tables are available in various capacities and travels to satisfy a wide variety of applications. The manual foot-pump models have an integrated hydraulic pump/cylinder assembly while a 24-volt DC power unit provides the lifting power on electric battery powered models.

The MobiLift™ scissor lift tables add the value of mobility to the hydraulic lift table concept. Exceptional functionality and maneuverability is apparent, whether loaded or empty. In addition, rugged construction and premium-quality hydraulics complement their ease of use with low maintenance.

The MobiLift™ design allows workers to easily move and position loads to a convenient working height. By minimizing undesirable lifting, reaching and stretching, MobiLifts increase productivity and decrease workplace injuries.

MobiLift™ tables are used in a wide variety of applications. From stocking shelves in retail stores to lifting and moving materials in libraries, nurseries, machine shops and manufacturing operations, MobiLifts improve productivity.

Warranty - Bishamon Industries Corp. ("Bishamon") warrants its products to be free from defects in material and workmanship for a period of one (1) year from the date of initial shipment. This warranty shall not apply to any misuse, mishandling, accident, shipping, alteration, or unauthorized repair of any Bishamon product or part. For complete details of warranty, please contact Bishamon at 800-358-8833.


EASE

LLPS

WAL

SMH

OMEGA

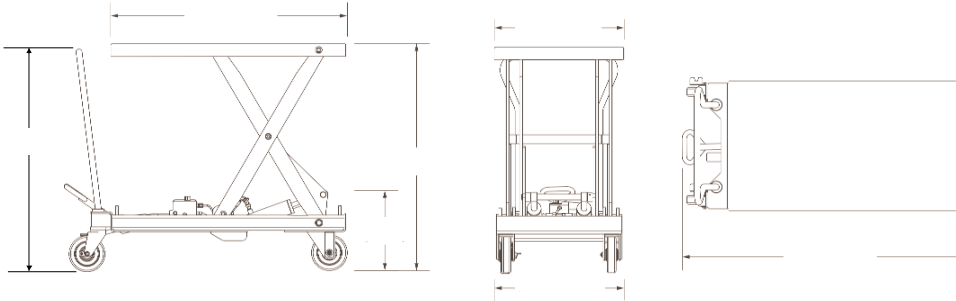

Selector Table for BX Series Mobile Lift Tables


Model	Travel (in)	Capacity* (lb)	Platform Height (in)		Platform Size (in)		Overall Size (in)			Strokes Or Lift Speed To Max. Ht.	Shipping Weight (lb)
			Min. (A)	Max. (B)	Width x Length (C)	(D)	Width x Length x Height (E)	(F)	(G)		
BX-15	20.4	330	8.4	28.8	17.7 x 27.6		17.7 x 33.6 x 31.3			15	75
BX-25	22.7	660	11.3	34.1	19.7 x 32.0		19.7 x 39.7 x 35.3			25	200
BX-50	22.1	1100	17.2	39.3	20.4 x 39.8		20.5 x 46.9 x 37.8			50	300
BX-75	22.1	1760	17.2	39.3	20.4 x 39.8		20.5 x 49.5 x 37.8			67	300
Double Scissor Models											
BX-30S	45.1	660	17.0	62.1	20.4 x 39.8		20.5 x 49.5 x 37.8			64	340
BX-50S	23.0	1100	16.5	39.5	18.1 x 25.6		18.1 x 37.2 x 37.0			66	275
BX-50W	45.1	1100	17.0	62.1	20.4 x 39.8		20.5 x 49.5 x 37.8			90	380
Stainless Steel Models											
BXS-10	20.4	220	8.4	28.8	17.7 x 27.6		17.7 x 33.6 x 31.3			15	75
BXS-20	22.7	440	11.3	34.1	19.7 x 32.0		19.7 x 39.7 x 35.3			25	200
Battery Operated Models											
BX-30B	23.5	660	11.5	35.0	19.7 x 32.1		19.7 x 41.7 x 34.6			10 Sec.	280
BX-50B	23.1	1100	17.2	40.4	20.5 x 39.8		20.4 x 50.0 x 37.4			10 Sec.	390
BX-80B	21.1	1760	17.2	38.4	20.5 x 39.8		20.5 x 49.4 x 37.4			12 Sec.	400
Double Scissors Battery Operated Models											
BX-15WB	39.0	330	15.2	54.1	19.7 x 32.1		19.7 x 39.7 x 35.4			10 Sec.	330
BX-30SB	46.3	660	17.5	63.8	20.5 x 39.8		20.4 x 50.0 x 37.4			12 Sec.	450
BX-50WB	46.1	1100	17.1	63.2	20.5 x 39.8		20.4 x 50.0 x 37.4			17 Sec.	490



*Convenient Hand-Lever
Lowering Control For Model BX*



*Removable Pendant Push-Button
Control in Handle Mount (BXB)*



*Dual-Action Caster Brake Locks
Wheel and Swivel*

Standard Features

- Heavy-duty construction with captured scissor rollers for maximum stability
- Superior hydraulic systems feature an integrated pump-cylinder for maximum reliability
- High quality casters and wheels for exceptional rollability
- Dual action caster brake locks both the wheel and the swivel
- Ergonomic push handle with convenient lowering control
- Lowering control automatically stops when released for added safety
- Convenient maintenance pins secure the scissor legs for inspection and maintenance
- Quality powder coated finish provides exceptional durability and corrosion resistance

Standard Features - Electric Models

- Removable push-button control on cord with convenient handle mount
- Ergonomic handle with integrated safety mesh
- Easily accessible On/Off switch with integrated circuit breaker
- Enclosed automatic 24 volt, 3 amp charger with removable power cord
- Green-Yellow-Red indicator lights provide quick indication of battery charge
- Easily accessible, adjustable lowering speed control
- Upper travel limit switch

Bishamon

Bishamon Industries Corporation

DISTRIBUTED BY: