
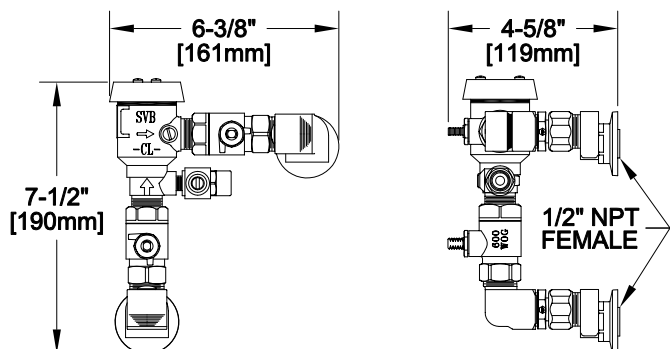
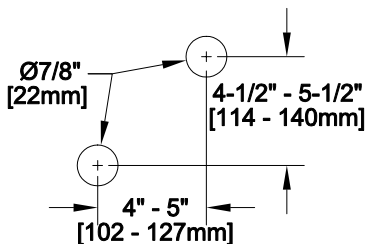

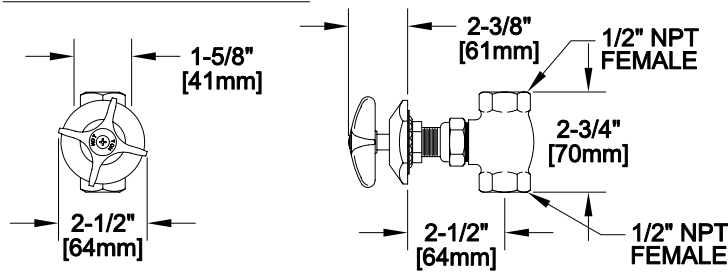
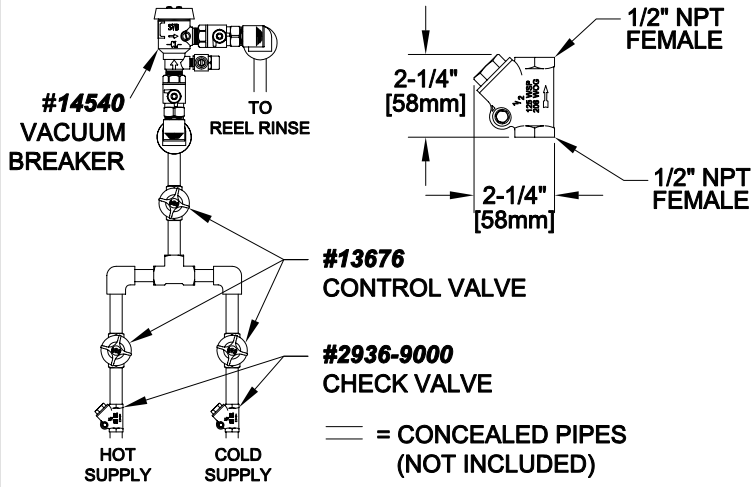


APPLICATION:		PRODUCT NAME: CONCEALED PIPING REEL RINSE INSTALLATION KIT	
JOB NAME:		☐ SPECIAL CONFIGURATION ☐ CHECK BASE MODEL AND OPTIONS	
QUANTITY:	ITEM NO.	MODEL: ■ 28266	
#14540 - VACUUM BREAKER 		OPTIONS OR MODIFICATIONS: ☐ OTHER _____	
VACUUM BREAKER ROUGH - IN 		FEATURES KIT INCLUDES THE FOLLOWING #14540 - VACUUM BREAKER (QTY: 1) #13676 - CONTROL VALVE (QTY: 3) #2936-9000 - CHECK VALVE (QTY: 2) VACUUM BREAKER * ANTI-SPILL DESIGN * ASSE - 1056 APPROVED * ADJUSTABLE ECCENTRICS INCLUDED	
CV ROUGH - IN 		CONTROL VALVE * ADJUSTABLE WALL DEPTH * INTERNAL SPRING LOADED CHECK VALVES * SWIVELLING SEAT DISKS * RIGHT HAND SWIVEL STEM WITH CROSS HANDLES * STAINLESS STEEL SEATS * STAINLESS STEEL SEAT SCREWS * STAINLESS STEEL HANDLE SCREWS * BLUE AND RED INDEX BUTTONS INCLUDED	
#13676 - CONTROL VALVE 		CHECK VALVE * BRASS BODY * ALLOWS FLUID FLOW IN 1 DIRECTION ONLY	
RECOMMENDED LAYOUT** 		SYSTEM LIMITS * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE: 150 PSI MAX STATIC	
#2936-9000 CHECK VALVE 		SHIPPING WEIGHT * 7.5 LBS	
** PIPES, ELBOWS AND TEES NOT INCLUDED		FISHER FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com	

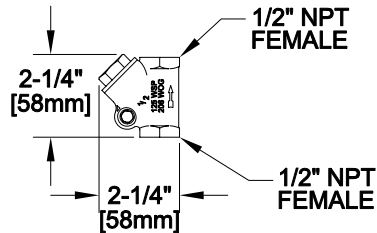

ANSI/A112.18.1M