

FEDERAL INDUSTRIES

A Standex Company 215 Federal Avenue Belleville, WI 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234

1 ux. 000 -	727 3237
Email: ge	ninfo@federalind.com
Website:	www.federalind.com

Project Name:	AIA#
Item #:	
Model #: Qty:	SIS#
Approval:	

HYBRID MERCHANDISER

SERVICE REFRIGERATED OVER SELF-SERVE REFRIGERATED

Display more product and serve more customers with presentation and value in mind.



MODEL	DIMENSIONS (Includes End Panels)
□ CRR3628/RSS3SC	36.25 x 43.25 x 72.50 (in)
	921 x 1099 x 1842 (mm)
□ CRR4828/RSS4SC	48 x 43.25 x 72.50(in)
	1219 x 1099 x 1842 (mm)
□ (2)CRR3628/RSS6SC	72 x 43.25 x 72.50 (in)
	1829 x 1099 x 1842 (mm)

STANDARD FEATURES

Refrigerated Self-Serve Bottom Display

- Black laminated exterior. Other finishes available.
- Black trim. Silver optional.
- Black interior, glass ends.
- Horizontal LED top and front light.
- Two tiers black metal shelves.
- Cord and plug. (Not available on six foot unit.)
- Thermometer
- R513a Refrigerant

Service Refrigerated Top Display

- Service Refrigerated Top Display
- Two tiers black wire shelves.
- Sliding rear doors.
- Black trim.
- Thermometer
- R513a Refrigerant

Lighting

• LED top light and shelf lights.

Agency Approvals

- UL Safety and UL Sanitation Listed to NSF Type II conditions.
- DOE 2017 Compliant

OPTIONAL ACCESSORIES

For Top Display

- ☐ Glass Shelves
- □ Reflective Ends
- □ Reflective Rear Doors

For Self-Serve Refrigerated Base

- ☐ Energy Saving Night Curtain
- $\hfill\Box$ Silver Trim
- $\hfill\Box$ Special Base Finish
- ☐ Mirrored Interior Ends
- ☐ Security Night Cover
- ☐ Stainless Steel Steps in Lieu of Metal Shelves
- ☐ Reflective End Glass







AIA#

HYBRID MERCHANDISER

SIS#


Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.19 (4.8)

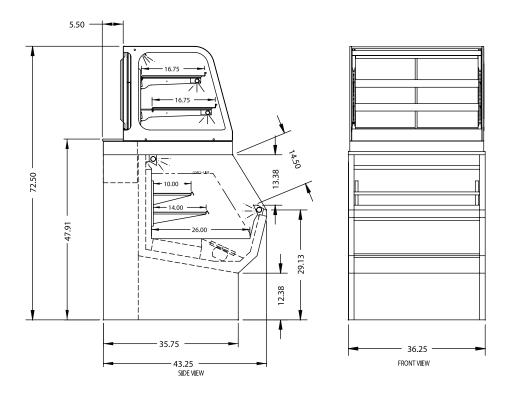

MODEL	DIMENSIONS			SHIPPING WHT		SELF-CONTAINED	TOD DISDLAY	
	L	D	Н1	UNITS	LBS	KILO	120/60/1	TOP DISPLAY
CRR3628/RSS3SC	36.25	43.25	72.5	in.	847	047 204	1/3 HP - 14.8 AMPS	8.1 AMPS
	921	1099	1842	mm.		384		
CRR4828/RSS4SC	48	43.25	72.5	in.	1010	0 458	1/2 HP - 16.0 AMPS	8.3 AMPS
	1219	1099	1842	mm.				
(2)CRR3628/RSS6SC	72	43.25	72.5	in.	1500	4500 600	3/4 HP - 16.0 AMPS + 10 AMPS	(2) 8.1 AMPS
	1829	1099	1842	mm.		680		

- On the six foot display a separate 120/60/1 15 AMP circuit is required for the condensate evaporator.
- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI recepticale.









FEDERAL INDUSTRIES A Standex Company

Email: Geninfo@Federalind.com
Website: Federalind.com

Phone: 800-356-4206

Fax: 608-424-3234

215 Federal Avenue Belleville, Wisconsin 53508-9201