
Spec Sheet Curtron Service-Pro Cafe Door Series 20

Quote/Order#	Company Name	
Attention	Email	
Phone#	.loh Name	

Check One Box for Desired Option




CLEAR OPENING HEIGHT			
FINISHED OPENING WIDTH			
	18" to 29.625"	29.6875" to 35.625"	35.6875" to 48"
OPTION B	FOH+6"	FOH+8"	FOH+10"
OPTION C	FOH+3"	FOH+4"	FOH+5"


*FOH denotes Finished Opening Height

	MAX OPEN	ING HEIGHT	
	FINISHED OPENING WIDTH		
	18" to 29.625	29.6875" to 35.625"	35.6875" to 48"
OPTION A	48.75	48.75	48.75
OPTION B	42.75	40.75	38.75
OPTION C	45.75	44.75	43.75

Fill in Opening Width, Opening Height and Handing below. (Opening Height doesn't include selected contour)

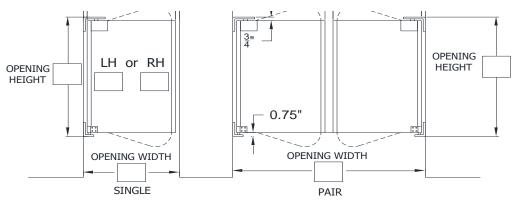

STANDARD SPECIFICATIONS: Door body 0.063" tempered aluminum alloy, satin anodized finish. No contour is standard. Straight cut (no countours) is standard. Door assembly includes the original Easy Swing® hinges. (FO Height Minimum 24", For Maximum see table.)



INSTALLATION DETAILS: Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations. Fasteners for mounting to jamb included.

Additional Specifications:		


APPROVED BY: DATE:



Spec Sheet Curtron Service-Pro Cafe Door Series 20 WITH POST

Quote/Order#	Company Name
Attention	<u>Email</u>
Phone#	Job Name

Check One Box for Desired Option




	CLEAR OPEN	IING HEIGHT	
FINISHED OPENING WIDTH			
_	19.5" to 31.125"	31.1875" to 37.125"	37.1875" to 48"
OPTION B	FOH+3"	FOH+4"	FOH+5"
OPTION C	FOH+3"	FOH+4"	FOH+5"

*FOH denotes Finished Opening Height


	MAX OPENI	NG HEIGHT	
FINISHED OPENING WIDTH		НТО	
	19.5" to 31.125"	31.1875" to 37.125"	37.1875" to 48"
OPTION A	54	54	54
OPTION B	48	46	44
OPTION C	51	50	49

Fill Post Height (Finished Opening Height), Handing and Opening Width Below.

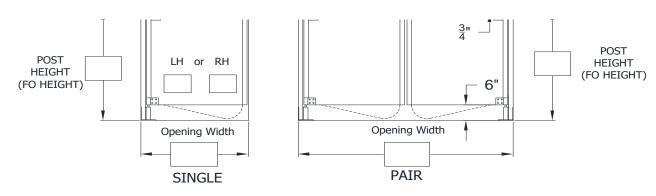

STANDARD SPECIFICATIONS: Door body 0.063" tempered aluminum alloy, satin anodized finish. No contour is standard. Door assembly includes the original Easy Swing® hinges installed on black powder coated freestanding gate post. (FO Height Minimum 24", For Maximum see table: Post Height Maximum 54")

INSTALLATION DETAILS: No Jamb needed for installation. Fasteners to mount to concrete floor included.



Additional Specifications:

APPROVED BY: DATE:

