



N8600-FWP FlexiWell

Individually Controlled Hot, Cold and Freeze
Combination Pan

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

N8600-FWP: Individually controlled Hot, Cold and Freeze Combination Pan

Models

- | | |
|-------------|--|
| • N8618-FWP | 18" hot, cold & freeze combination pan drop-in |
| • N8633-FWP | 33" hot, cold & freeze combination pan drop-in |
| • N8648-FWP | 48" hot, cold & freeze combination pan drop-in |
| • N8663-FWP | 63" hot, cold & freeze combination pan drop-in |
| • N8678-FWP | 78" hot, cold & freeze combination pan drop-in |
| • N8693-FWP | 93" hot, cold & freeze combination pan drop-in |



N8663-FWP

Standard Features

- NSF-4 and NSF-7 certified for hot and cold operation
- Wells operate independently for hot/cold/freeze operations in any combination
- Flush mount pans standard
- Thermostatic temperature controls
- Dry operation only - No water required
- Stainless steel louver(s) provided
- High density environmentally friendly Kyoto Protocol compliant, Non-ODP (Ozone Depletion Potential), Non-GWP (Global Warming Potential) polyurethane foam throughout
- Push in flange gasket is standard
- Environmentally friendly R290 refrigerant
- 2-year parts and labor warranty, standard parts warranty

Options & Accessories

- Adapter bars

Specifications

Top: Top is constructed of one-piece stainless steel

Interior: Interior liner is constructed of aluminum with flush mount flange for heating or cooling to accommodate up to 6" (15cm) deep 12"x20" pans, supplied by others.

Exterior: Exterior body is constructed of galvanized steel with High density environmentally friendly Kyoto Protocol compliant, Non-ODP (Ozone Depletion Potential), Non-GWP (Global Warming Potential) polyurethane foam throughout.

Refrigeration: Condensing unit is suspended on a galvanized steel frame. Environmentally friendly R290 refrigerant is utilized. Temperature controlled by thermostat located in remote control panel.

Operation: Remote control panel contains 3-way Hot/Cold/Off power switch and thermostat for heated, cold and freeze operation.


Electrical: All units must be hard wired at installation.


Louver Panel dimensions: 25"x13"

Louver Panel Cutout dimensions: 23.50"x12"



N8600-FWP: Individually controlled Hot, Cold and Freeze Combination Pan

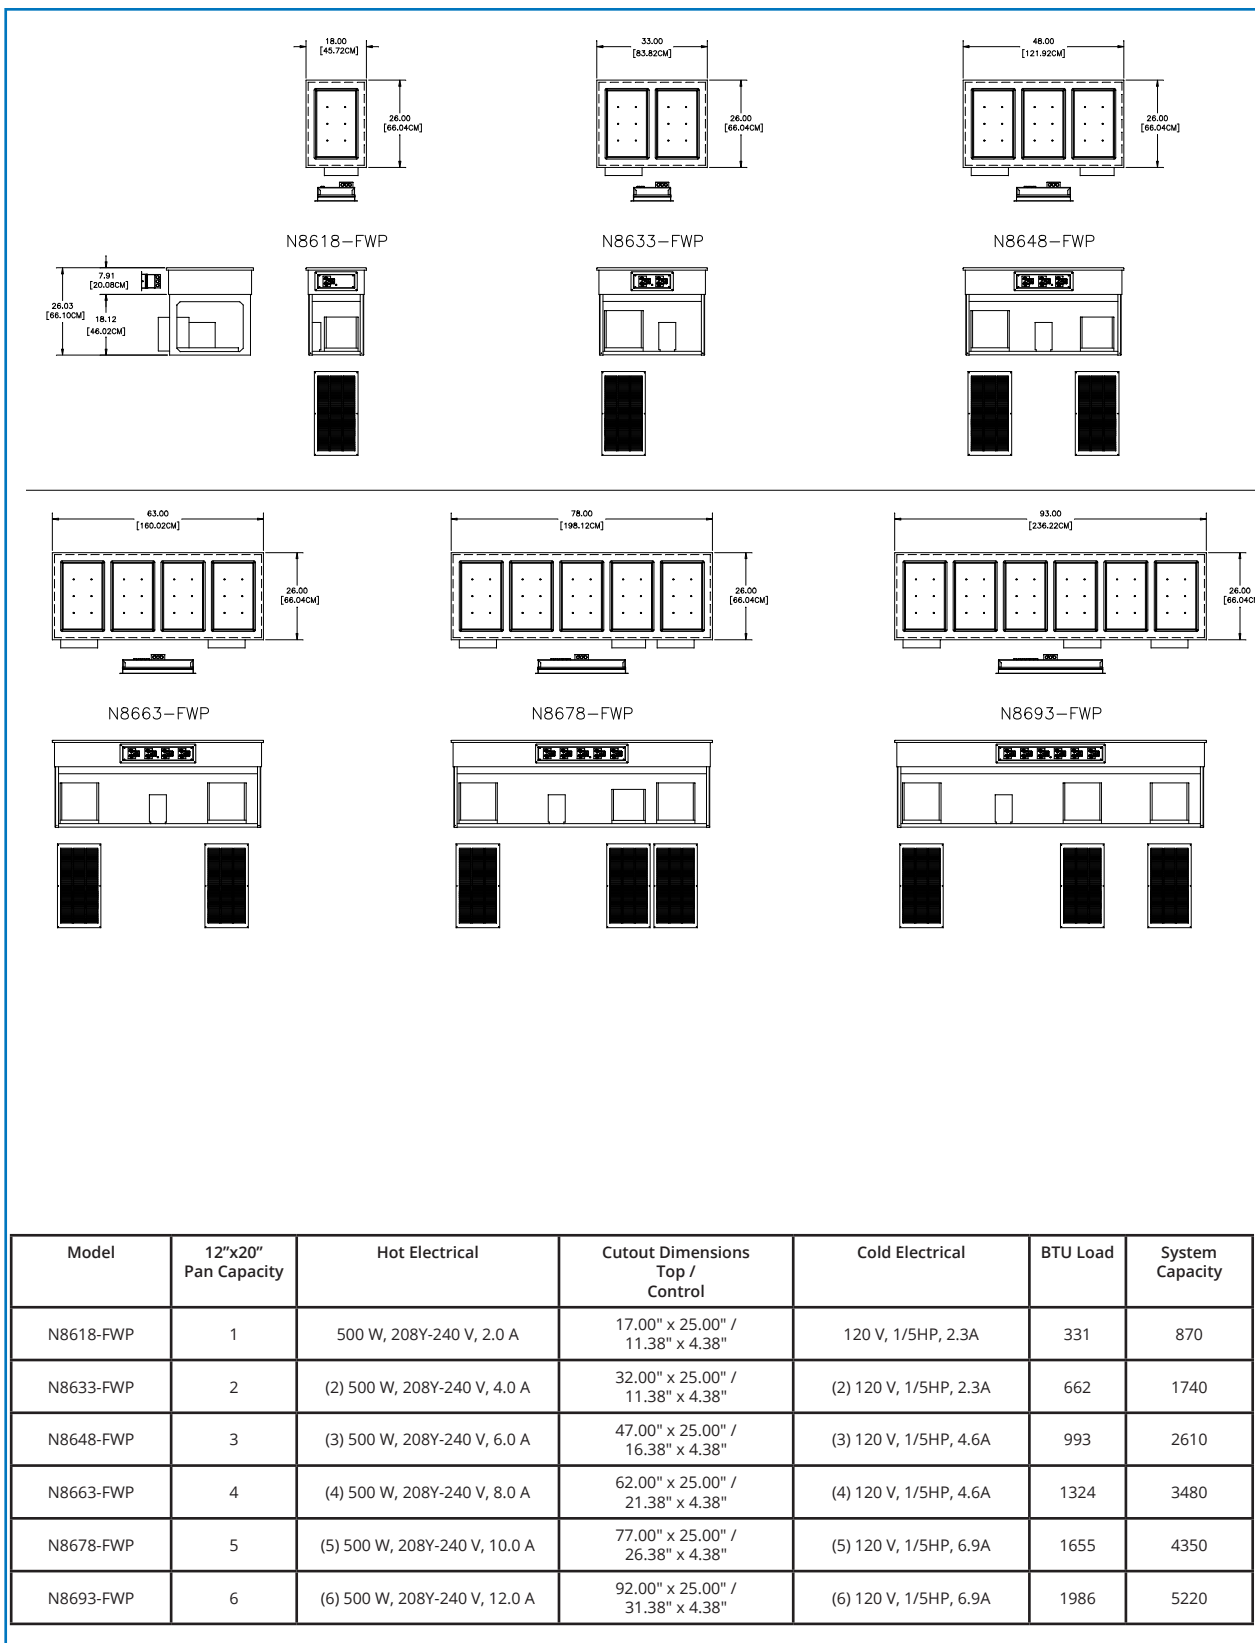

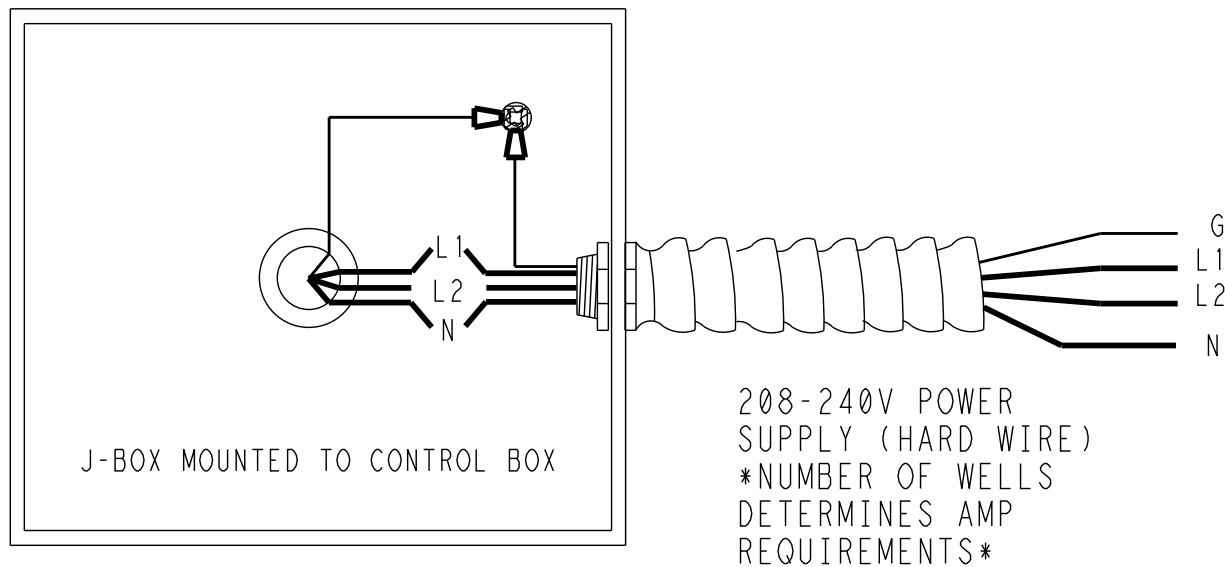

Welbilt reserves the right to make changes to the design or specifications without prior notice.

Page intentionally left blank