

CV15E

Blast Chiller/Shock Freezer

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____



Blast chiller



Ice cream



Conservation
cycle



Thawing



Hot gas
defrosting



Chilling
programs



Data
storage



Standard Features

- 4 different cycles for blast chilling and 4 for shock freezing
- Hot gas defrost
- Capacitive Touch control
- Functions available: Blast chiller, Shock freezing, Shock freezing continuous, thawing, ice cream cycle, cycle programs storable, HACCP report alarms
- Stainless steel construction
- Upload and Download data with USB
- Unit must be hardwired - no cord/plug supplied
- Condensation pan standard - factory recommends to run unit to floor drain
- (or pan will need to be emptied after each cycle completes)
- Three year parts and labor warranty and an additional two year compressor parts warranty

Options & Accessories

- Sanitizing ozone cycle
- Castor kit
- Adapter mount for oven

Capacity



143 lbs
 +194°F -> +37.4°F
65 kg
 +90°C -> +3°C



110 lbs
 +194°F -> +37.4°F
50 kg
 +90°C -> +18°C


15

12"x20" Pans



Code number	Value
Power Supply	208-240V/3/60Hz
Outside length	33.07" / 840 mm
Depth (with handle)	34.64"(36.61") / 880 (930) mm
Height (with legs)	76.85"(78.74") / 1952 (2002)mm
Capacity	15
Compressor / HP	3.6HP
Output chilling (+90°C/+3°C) (+194°F -> +37.4°F)	65kg / 143lbs
Output freezing (+90°C/-18°C)(+194°F -> +37.4°F)	50kg / 110lbs
Minimum circuit ampacity MCA/ Maximum overcurrent protector MOP	23 A / 60 A
Refrigeration power (-10°C/+45°C)	8460 W
Refrigerant gas type	R404A (GWP 3922)/88.2 oz
Noise level	68 dBA
Net/Gross weight	564/624 lbs
Shipment data (WxDxH)	34.65"x38.58"x85.04" / 624lbs

Dimensions

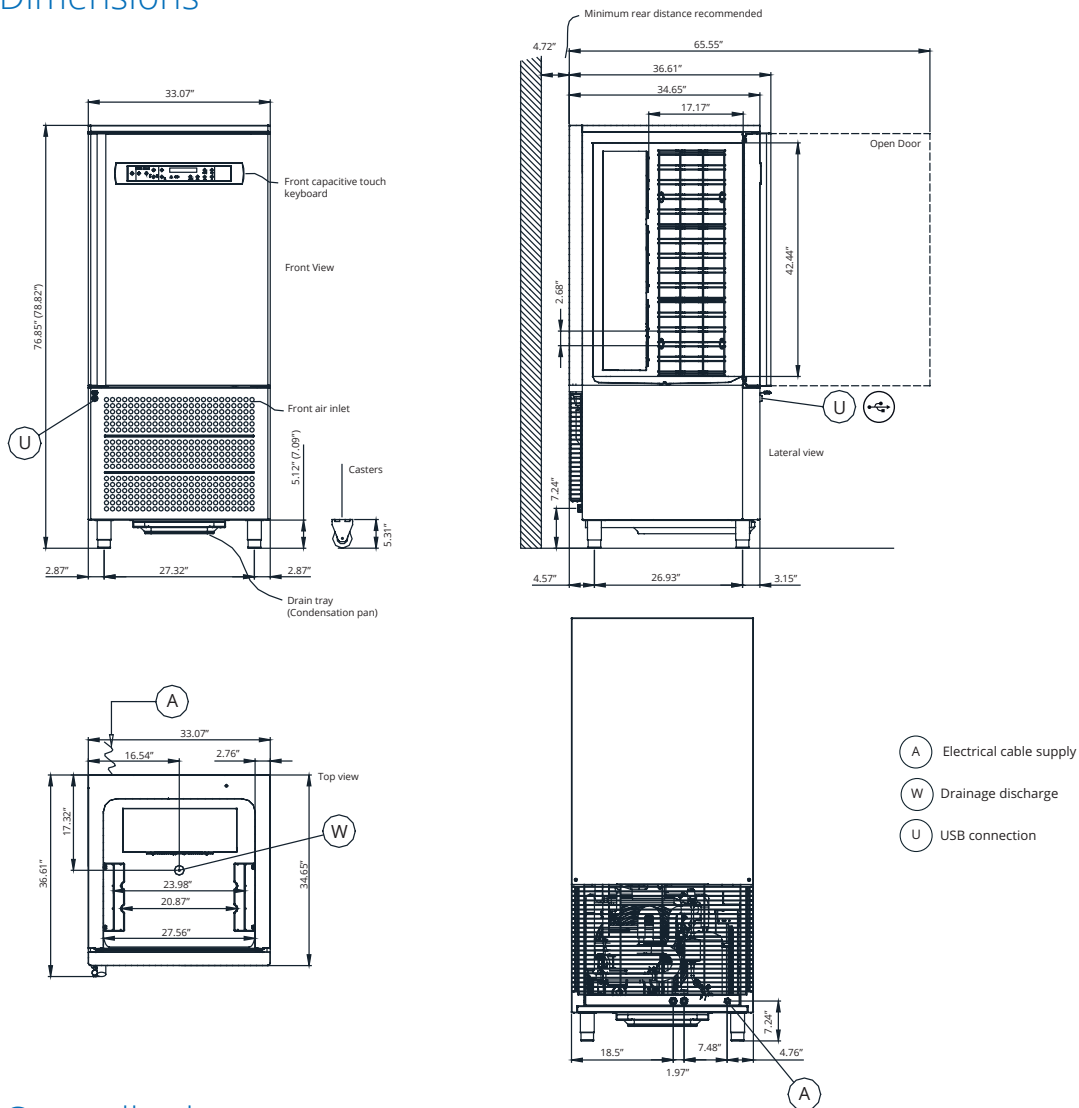

Controller layout



Welbilt reserves the right to make changes to the design or specifications without prior notice.