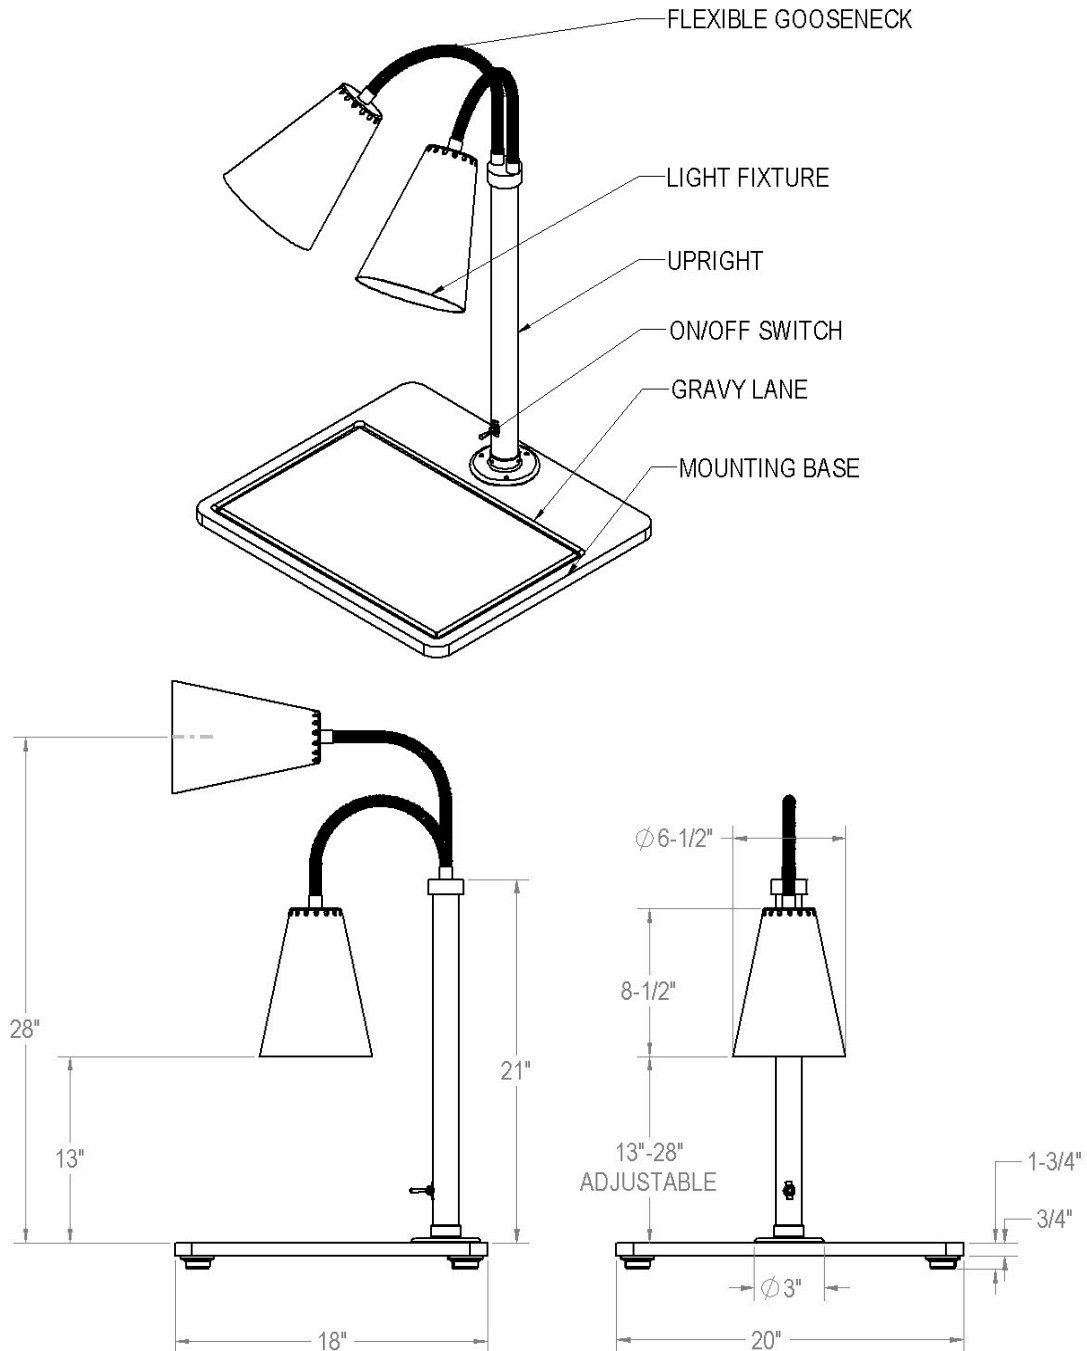




DLM-BB-ST

STREAMLINE DUAL LAMP BLACK BASE MOUNTED WARMER











DLM-BB-ST

STREAMLINE DUAL LAMP BLACK BASE MOUNTED WARMER

Description: Streamline dual heat lamp fixture with a clean modern look mounted on an 18" x 20" x 3/4" thick black solid surface base. Base comes with routed gravy lane. Lamp body is made of stainless steel. Brass surfaces have a clear baked enamel finish. All internal components including lamp sockets and wiring are high temperature rated (392°F/200°C). Switch is rated for 15 amps @ 120 volts.

Standard Models					
Model Number	Description				
DLM-BB-ST	Streamline dual lamp black base mounted warmer				
Available Finishes: Black, Stainless Steel, Chrome, Smoked Copper, Brass, Bright Copper					
Shade Styles					
					
200	300	500	600	700	900
5-1/2" X 7-1/2" Diameter X Length 140 mm X 191 mm	7-1/8" X 7-1/2" Diameter X Length 181 mm X 191 mm	7-1/4" X 7-3/8" Diameter X Length 184 mm X 187 mm	6-1/2" X 8" Diameter X Length 165 mm X 203 mm	7" X 8" Diameter X Length 178 mm X 203 mm	6-1/2" X 8-1/2" Diameter X Length 165 mm X 216 mm
Specifications					
Mechanical					
Light head material	Aluminum				
Light head	Varies depending on lamp shade chosen. See shade styles				
Light head height from mounting surface	Adjustable 10-15"				
Upright and all fittings	Stainless Steel				
Base Material	Synthetic black solid surface				
Base Size	18" x 20" x 1 1/2" thick (includes non-slip feet)				
Shipping weight	Approximately 35 lbs.				
Internal wiring	18 gauge Silver stranded with Teflon insulation. Rated (200° C)				
Lamp socket	Glazed porcelain/nickel. Rated (200° C)				



HANSON

DLM-BB-ST

STREAMLINE DUAL LAMP BLACK BASE MOUNTED WARMER

Switches	On/Off rated 15 amps @ 115 VAC
Power cord	120 VAC-18 gauge 3 conductor cable 84" long with Nema 5-15P plug (standard) 240 VAC-18 gauge 3 conductor harmonized cable 84" long with Schuko plug (standard).
Electrical	
Operating Voltage (Domestic)	120 volts 60 Hertz single phase
Operating Voltage (International)	240 volts 50 Hertz single phase
Power	500 watts Maximum
Operating amperage	2.5 amps (120 VAC) 1.25 amps (240 VAC)
Bulb type	Infrared 250 watts maximum, shatterproof design