

ED3-96 Display Case

UL

ALTO-SHAAM.

Drive foodservice profits with display cases from Alto-Shaam. LED lighting and mirrored back doors enhance food appearance and boost impulse sales. To not only look but taste great, food is held at optimal, precise temperatures with Halo Heat® technology and top ceramic heaters. Multiple access points and a removable back work shelf makes unloading and loading food effortless for employees. Reduce labor and cleaning time with removable back doors and side panels, and a lifting glass front.

Standard features

- Fanless, waterless Halo Heat technology
- Overhead LED lighting
- Adjustable thermostats 1-10 per heat zone for top and bottom heat
- Ceramic top heaters
- Operator-side work shelf and cutting board
- Sliding back doors with mirrored glass
- Tempered glass front with self-supported lifting mechanism
- Removable back doors and side glass panels
- One set of 4" (102mm) legs with rubber feet
- Seven (7) pan zones to hold standard pan sizes (GN)
- Three (3) heat zones
- Three (3) heat-on indicator lights
- Six (6) long pan dividers (1002590)
- Seven (7) short pan dividers (1002621)
- Twenty-one (21) short pan dividers (11318)

Pan* Capacity			
Pan Size	Pan Dimensions		Qty.
Full-Size & One-Third**:	12" x 20" x 2-1/2"	(GN 1/1)	7
	12" x 6" x 2-1/2"	(GN 1/3)	7
Half-Size & One-Third**:	12" x 10" x 2-1/2"	(GN 1/2)	14
	12" x 6" x 2-1/2"	(GN 1/3)	7
Full-Size Sheet Pans:	18" x 26" x 1"		4
Max. Capacity/Volume:	112 lbs (51 kg)	70 qts (84 L)	
* Pans are not included with display case. ** Will also accept 4" (100mm) deep pans.			



ED3-96 on Mobile Base



ED3-96 with Legs



ED3(SYS)-96
With Stationary Base

Configuration

- ☐ ED3-96 with 4-inch legs and rubber feet (standard)
- ☐ ED3-96 with mobile base, standard height
- ☐ ED3-96 with mobile base, short
- ☐ ED3(SYS)-96 with stationary base

Electrical

- ☐ 208V, 50/60 Hz, 1PH
- ☐ 240V, 50/60 Hz, 1PH

Options and Accessories

Panel Color (select one)

- ☐ Black, standard
- ☐ Stainless steel, optional

End Glass (select one)

- ☐ Clear glass, standard
- ☐ Solar bronze glass, optional (5011353)

Additional

- ☐ Temperature gauge (GU-48153)
- ☐ Right-mounted scale platform (5001307)
- ☐ Left-mounted scale platform (5001308)
- ☐ Work shelf with gravy lane; two (2) (5005638)
- ☐ Pan insert (4" deep) (1001990)
- ☐ 1/3 Pan cover-up bar (1008014)
- ☐ Sheet pan divider bar package (5002803)

Extended warranty

- ☐ One-year warranty extension




ED3-96 Display Case

ALTO-SHAAM.

DIMENSIONS

ED3-96 with Legs

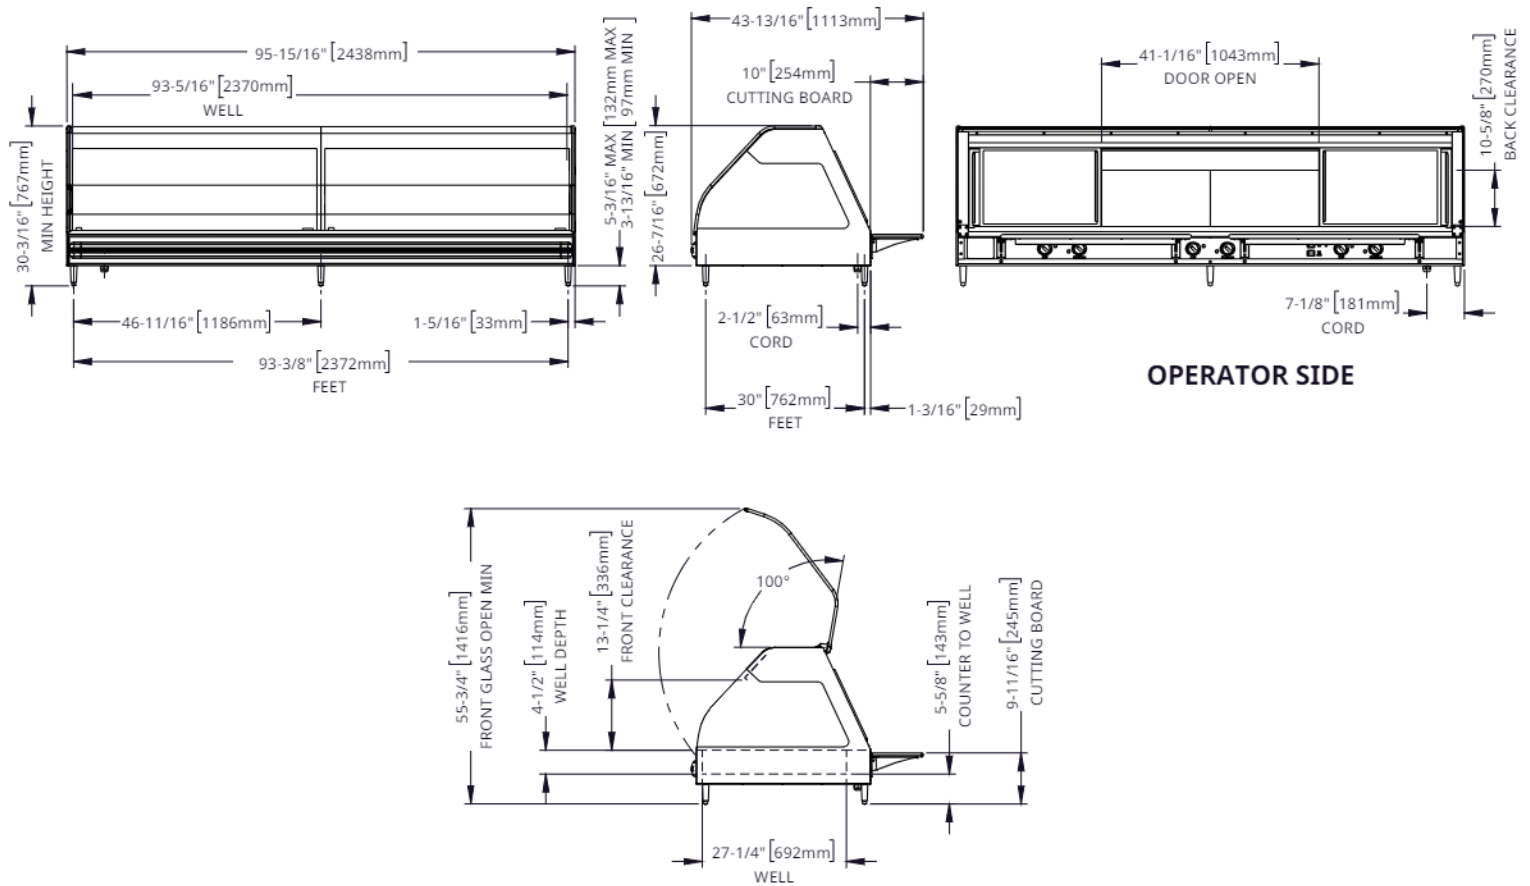

Model

ED3-96
Legs

Exterior (H x W x D)

30-3/16" x 95-15/16" x 43-13/16" [767mm x 2438mm x 1113mm]

Ship Dimensions (H x W x D)*

45" x 100" x 55" [1143mm x 2540mm x 1397mm]

Well (W x L x D)

27-1/4" x 93-5/16" x 4-1/2" [692mm x 2370mm x 114mm]

Ship Weight*

585 lb [265 kg]

Net Weight

526 lb [239 kg]


*Domestic ground shipping information. Contact factory for export weight and dimensions.

ED3-96 Display Case

ALTO-SHAAM.

DIMENSIONS

ED3(SYS)-96 with Stationary Base

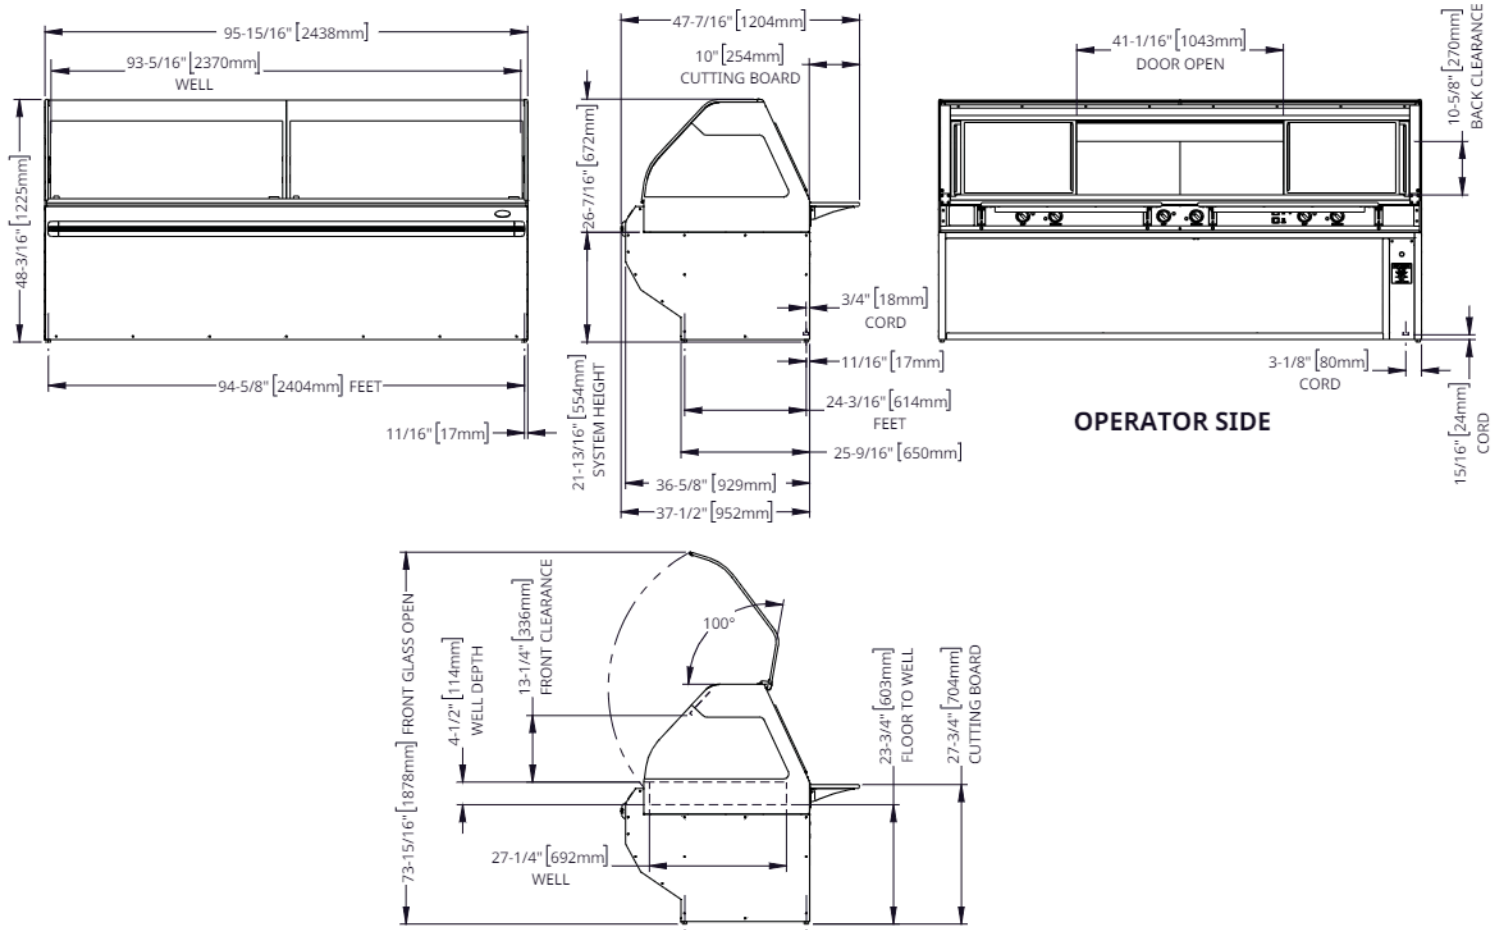

Model

ED3-96
SYS

Exterior (H x W x D)

48-3/16" x 95-5/16" x 47-7/16" [1225mm x 2438mm x 1204mm]

Well (W x L x D)

27-1/4" x 93-5/16" x 4-1/2" [692mm x 2370mm x 114mm]

Net Weight

716 lb [325 kg]

Ship Dimensions (H x W x D)*

65" x 100" x 55" [1651mm x 2540mm x 1397mm]

Ship Weight*

796 lb [361 kg]

*Domestic ground shipping information. Contact factory for export weight and dimensions.

ALTO-SHAAM.

ED3-96 Standard Mobile Base




*Domestic ground shipping information. Contact factory for export weight and dimensions.

ED3-96 Display Case

ALTO-SHAAM.

DIMENSIONS

ED3-96 Short Mobile Base

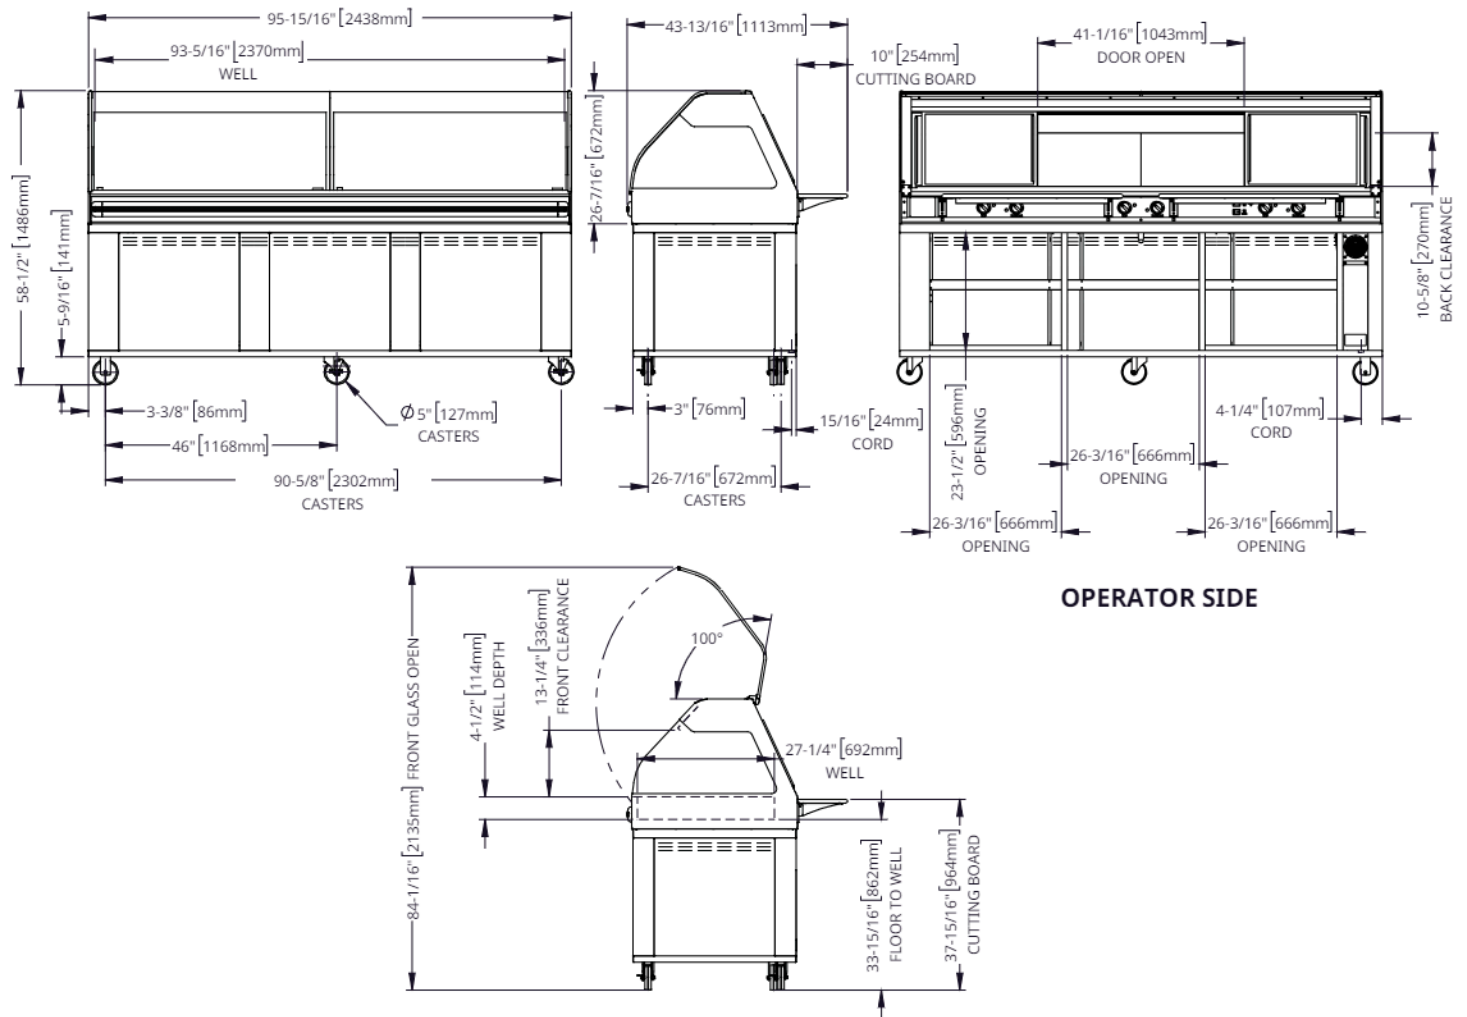

Model	Exterior (H x W x D)	Well (W x L x D)	Net Weight
ED3-96	58-1/2" x 95-15/16" x 43-13/16" [1486mm x 2438mm x 1113mm]	27-1/4" x 93-5/16" x 4-1/2" [692mm x 2370mm x 114mm]	676 lb [307 kg]
Mobile			
Short			
	Ship Dimensions (H x W x D)*	Ship Weight*	
	45" x 100" x 75" [1143mm x 2540mm x 1905mm]	735 lb [333 kg]	

*Domestic ground shipping information. Contact factory for export weight and dimensions.

ALTO-SHAAM.

[illegible]

- The display case must be installed level.
- The display case must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Do not install a heated display case near a cold air source such as a freezer, air conditioning vents, or in any area where outside air fluctuation can affect performance.



ED3-96 With feet	V	Ph	Hz	AWG* minimum	A	Breaker minimum	kW	Connection
	208	1	50/60	14	16.8	21A	3.49	6ft; NEMA 6-30
	240	1	50/60	14	19.3	25A	4.164	6ft; NEMA 6-30

ED3-96 With base	V	Ph	Hz	AWG* minimum	A	Breaker minimum	kW	Connection
	208	1	50/60	14	16.8	21A	3.49	Cord, no plug
	240	1	50/60	14	19.3	25A	4.64	Cord, no plug

HDC-SPC-0017 7/24 EN Printed in U.S.A. Due to ongoing product improvement, specifications are subject to change without notice.