

ELECTRIC HOT FOOD TABLES

WITH ENCLOSED BASE



For Use with Optional Spillage Pans



Item #:	Qty #:
Model #:	
Project #: _	



FEATURES:

Stainless steel body, top and legs Stainless steel undershelf

Fiberglass insulation between each compartment Units intended for dry use. For hot water bath, must use optional Spillage Pans # SP-A (Aluminum) or

SP-S (Stainless)

Stainless steel 8" support shelf with removable 3/8" thick poly cutting board - Ships K.D.

MATERIAL:

TOP: 20 gauge #302 stainless steel with die stamped pan openings. (11.875" x 20.062") BODY: 22 gauge #430 stainless steel **LEGS:** 18 gauge stainless steel with fully adjustable stainless steel bullet foot

UNDERSHELF: 22 gauge #430 stainless steel LINERS: 8" deep, 22 Gauge galvanized (standard) or #302 stainless steel upgrade (Model # SU-32)

CUTTING BOARD: White Thermoplastic **CUTTING BOARD BRACKETS:** 16 gauge #302

stainless steel

ELECTRICAL:

120V units yield 500 Watts 208V/240V dual voltage units yield 750 Watts at 208V and 1000 Watts at 240V 6' electrical cord with plug Infinite control knobs Indicator lights



Model #	Length	Width*	# of Wells	Volts	Amps	Watts	NEMA Plug	Wt.	Cu. Ft.
HF-2E-120-BS	A = 31-13/16"	30-5/8"	2	120	8.33	1000	5-20P	92 lbs.	28
HF-3E-120-BS	B = 47-1/8"	30-5/8"	3	120	12.50	1500	5-20P	130 lbs.	41.32
HF-4E-120-BS	C = 62-7/16"	30-5/8"	4	120	16.67	2000	L5-30P	250 lbs.	54.55
HF-2E-240-BS	A = 31-13/16"	30-5/8"	2	208/240	7.21/8.33	1500/2000	6-20P	92 lbs.	28
HF-3E-240-BS	B = 47-1/8"	30-5/8"	3	208/240	10.82/12.50	2250/3000	6-20P	130 lbs.	41.32
HF-4E-240-BS	C = 62-7/16"	30-5/8"	4	208/240	14.42/16.67	3000/4000	L6-30P	250 lbs.	54.55
HF-5E-240-BS	D = 77-3/4"	30-5/8"	5	208/240	18.03/20.84	3750/5000	L6-30P	290 lbs.	66.94

*Width Includes 8" Cutting Board

NOTE: Units are not designed to cook or heat frozen or refrigerated foods. Food placed in tables should already be hot, and the table will maintain the proper temperatures

NEMA PLUGS: Your plug will look like this...











NEMA L6-30P

NOTE: For international applications, plug may need to be replaced (by others) in field.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.


For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Ouotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933

TOL ± .125" ALL DIMENSIONS ARE TYPICAL

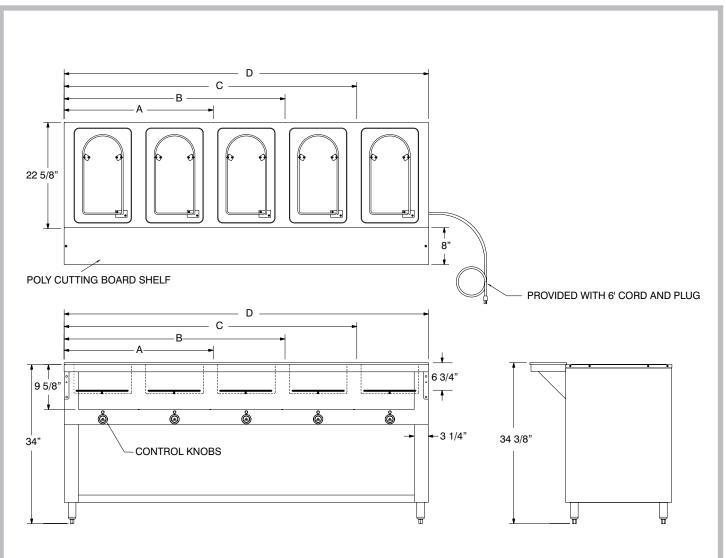

All dimensions are the same for the stainless steel wells option.

SP-A - Spillage Pan



SU-25 - Casters

Food Table Accessories

Visit our website for additional Food Table Accessories

- **SU-32** Upgrade to a Stainless Steel Lining (Excludes Sealed Hot Well Units)
- **TA-255P** Add Casters to Enclosed Base Food Units (Includes 4 -5" Swivel Casters, 2 w/ Brakes)
 - SP-A Aluminum Spillage Pan
 - SP-S Stainless Steel Spillage Pan
- SU-45A 12" x 1" Adapter bar
- SU-45B 20" x 3" Adapter bar
- SU-72 Upgrade to 240 volt units to 3-Phase Wiring
- TCB-OMIT Remove Poly Cutting Board



19-1/4" Height

Acrylic Food Shield has 10" Clearance from Deck

Double Sided Self-Serve Buffet Shelf with Built-In Food Shield

Model	Length	Wt.	Ft.
TBS-2	31-13/16"	34 lbs.	2
TBS-3	47-1/8"	42 lbs.	3
TBS-4	62-7/16"	47 lbs.	4
TBS-5	77-3/4"	55 lbs.	4

