# PRODUCT SPECIFICATIONS

Elkay Slimline® Soft Sides® Fountain Non-Filtered Non-Refrigerated, Stainless. Furnished with Flexi-Guard ® Safety Bubbler. Mechanical Front Bubbler Button activation. Product shall be Wall Mount (On Wall), for Indoor + Outdoor applications, serving 1 station(s). Unit shall be lead-free design which is certified to NSF/ANSI 61 & 372 (lead free) and meets Federal and State low-lead requirements.

Finish:	Stainless Steel
Power:	No Electrical Required
Bubbler Style:	Flexi-Guard ® Safety Bubbler
Activation by:	Mechanical Front Bubbler Button
Mounting Type:	Wall Mount (On Wall)
Chilling Option:	Non-refrigerated
Dimensions (L x W x H):	19-3/4" x 19-3/8" x 20-3/8"
Approx. Shipping Weight:	26 lbs.
Installation Location:	Indoor + Outdoor
No. of Stations Served:	1

 Mechanically-Activated bubbler continues to supply water in event of service disruptions.



### AMERICAN PRIDE. A LIFETIME TRADITION.

Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.



Included with Product: Stainless steel wall plate with surface

mounting plate and vandal-resistant

bottom cover plate.

# PRODUCT COMPLIANCE

ADA & ICC A117.1 ASME A112.19.3/CSA B45.4 Buy American Act NSF/ANSI 61 & 372 (lead free)





Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards. Installation may require additional components and/or construction features to be fully compliant. Consult the local Authority Having Jurisdiction if necessary.

## Installation Instructions (PDF)

Water Systems are warranted for 12 months from date of installation. Warranty pertains to drinking water applications only. Non-drinking water applications are not covered under warranty. Warranty (PDF)


### OPTIONAL ACCESSORIES

0. 1.0.1.7.0 0 E 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1
EWF172 - Elkay WaterSentry VII Filter Kit (Coolers + Fountains)
AP99 - Elkay Access Panel 9" x 9" x 6"
LKAPR2 - Elkay Cane Apron for EHW Stainless Steel

PART:	QTY:
PROJECT:	
CONTACT:	
DATE:	
NOTES:	
APPROVAL:	

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



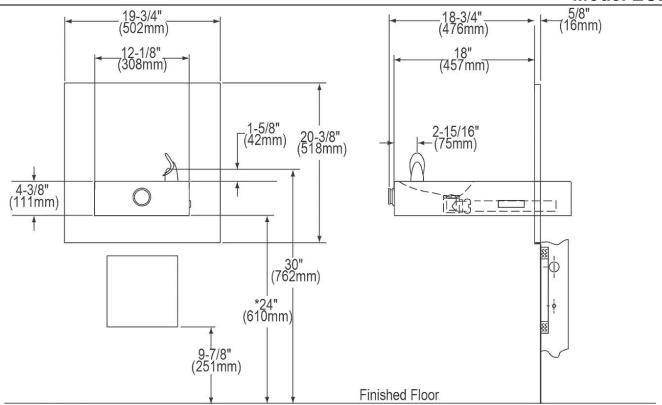

\*Child ADA Requirement

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



#### OPERATION OF QUICK CONNECT FITTINGS **INSTALLER NOTE** 3/8" O.D. TUBE CONNECT COLD WATER SUPPLY This drinking fountain is furnished with a bubbler 1/4" O.D. TUBE WATER INLET BUILDING WATER INLET SIMPLY PUSH IN TUBE TO ATTACH TUBE IS SECURED IN POSITION PUSH IN COLLET TO RELEASE TUBE and waterway with all connecting fittings which are manufactured of completely lead free material. Shut off valve (not included) to accept 3/8" O.D. 1777 unplated copper tube ㅁ PUSHING TUBE IN BEFORE PULLING IT OUT HELPS TO RELEASE TUBE NOTE : WATERFLOR DIRECTION SERVICE STOP (NOT FURNISHED) (13mm) \*\*FURNISHED LENGTH (CUT TO SUIT) \*\*TBD (810mm) 3/8" SUPPLY 1-1/4" I.P.S EXTENSION AND TRAP BY WASTE OTHERS (SHOWN WITHIN WALLS) 25-3/16 \*30" 1-1/4" I.P.S. WASTE (LEFT OR RIGHT) (640mm) (762mm) AP99 \*24" 26-7/16" ACCESS PANEL (229mm) (672mm) (610mm) (OPTIONAL) 3/8" SUPPLY LEFT OF RIGHT SIDE 21-1/2" (546mm) 17-1/2" 9" (445mm) (229mm) REAR ACCESS REQUIRED 9-7/8 12-1/2" (251mm) FOR INSTALLATION OR OPTIONAL FRONT ACCESS FINISHED FLOOR PANELS AP99 \*Child ADA Requirement NOTE: REINFORCE THE WALL IN THE SHADED AREAS TO SUPPORT UP TO 300 LBS. STATIC LOAD. 8" (406mm) 8" 8" . 1/4" (6mm) Ø HOLES FOR MOUNTING PLATE TO WALL (203mm) (203mm) BACK PANEL 5-1/4" (13<sub>,</sub>3mm) 5-1/4" LOAD BEARING - 3/8" (10mm) Ø HOLES FOR MOUNTING PLATE (133mm WALL CONSTRUCTION 5/8" (16mm) WALL PLATE TO WALL (10) INSTALL (2) 1/4" (6mm) SCREWS OR EQUIVALENT ASSEMBLY ATTACH SURFACE MOUNTING PLATE (BY OTHERS) TO FINISHED WALL 20-1/8" (13mm) (511mm) (1005mm) **(** (152mm)

INSTALL (12) 5/16" (8mm) LAG SCREWS OR

EQUIVALENT WITH FLAT WASHERS

BY OTHERS

SUPPLY 3/8" I.P.S

LEFT OR RIGHT SIDE

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

26-7/16" (672mm)

25-3/16"

(640mm)

WASTE

TRAP

(BY OTHERS)

SUPPLY

(SHUT OFF

FINISHED FLOOR FRONT VIEW

BY OTHERS)

11 T T T

(203mm)

23-1/16"

(586mm)

(203mm)

10-3/8"

(264mm)

WASTE 1-1/4" I.P.S. LEFT OR RIGHT SIDE. WASTE IS SHOWN

IN WALL BUT MAY

BE BEHIND WALL

17-1/21

(445mm)

12-1/2"

(318mm)

SIDE VIEW