

PROJECT:		
ITEM#		QTY:
MODEL# _		
AIA #	SIS #	
APPROVED:		

VISTA® BOTTOM MOUNT REACH-IN FREEZER

Model: FB27HC-1S

SOLID DOORS



7 YEAR WARRANTY Parts, Labor, and Compressor

CABINET CONSTRUCTION

- · Stainless steel front and door, gray painted sides
- · Gray painted aluminum interior
- Full electronic control
- · LED lighting
- Self-closing door with 120° stay-open feature, on spring-loaded hinges
- · Door lock
- One-piece grille allow easy removal/installation for preventative maintenance
- · Three (3) heavy duty epoxy coated wire shelves standard
- 6" Casters standard with (2) brakes



OPTIONS & ACCESSORIES


- · Epoxy shelves (5 max per section)
- · Shelf clips
- · 3" Casters or 6" legs
- 6" Flanged/seismic feet
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- · Adaptive defrost
- · Epoxy coated evaporator coil
- Maintains product temperatures of 0° F and below

BEVERAGE-AIR

Vista[®] Bottom Mount Freezer Model: FB27HC-1S

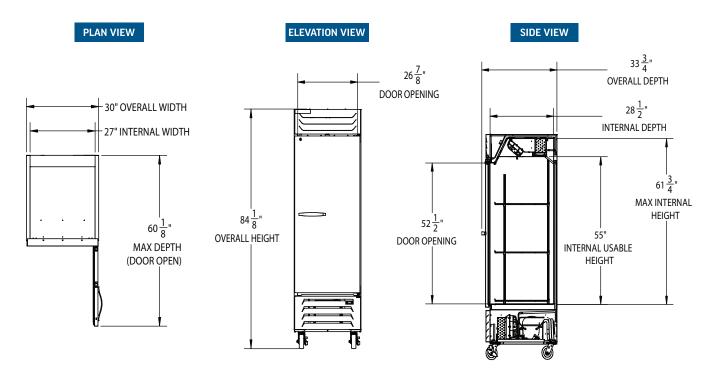

EXTERNAL DIMENSIONAL DATA			
Width Overall (in)	30"		
Depth Overall (in)	33 3/4"		
Height Overall (in)	84 1/8"		
Number of Doors	1		
Depth with Door open 90° (in)	60 1/8"		
Door Openings (in)	26 7/8" x 52 1/2"		
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft).	25.97		
Internal Width Useable (in)	27"		
Internal Depth Overall (in)	28 1/2"		
Internal Height Overall (in)	61 3/4"		
Number of Shelves	3		

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

ELECTRICAL DATA			
Full Load Amps	10		
Voltage	115/60/1		
Nema Plug (8' cord)	5-15P		
REFRIGERATION DATA			
Horsepower	3/4		
Capacity (BTU/Hr)	2772		
Heat Rejection (BTU/Hr)	4158		
Charge (lbs/grams/ounces)	0.2204 / 99.9 / 3.53		
SHIPPING DATA			
Gross Weight - Crated	438 lbs.		
Height - Crated (in)	85"		
Width - Crated (in)	32"		
Depth - Crated (in)	36"		

ELECTRICAL CONNECTION



115/60/1 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 12/25 | Printed in U.S.A.

