



BEVERAGE-AIR®

PROJECT: _____
ITEM # _____ QTY: _____
MODEL # _____
AIA # _____ SIS # _____
APPROVED: _____

BAR EQUIPMENT - GLASS & PLATE FROSTER

Model: FLG24HC-1-S

SOLID DOOR / FRONT LOADER



7 YEAR WARRANTY Parts, Labor, and Compressor

CABINET CONSTRUCTION

- Stainless steel front, sides and door, (galvanized back and bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel top
- Front loading
- Full electronic control
- Interior thermometer is standard
- Self closing door with 120° stay open feature, on cartridge style hinges
- Door opening includes low wattage, anti-condensate heaters
- Magnetic gasket for positive seal
- Two (2) epoxy coated shelves standard
- Field reversible door
- Automatic defrost of coil is standard
- Built-in condensate evaporator system
- No floor drain or additional plumbing



OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Remote option* (refrigerant must be specified at time of order, see note on back on page)

REFRIGERATION SYSTEM


- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Chills glasses and plates at 0°F and below (factory setpoint is 0°F)




BEVERAGE-AIR®

Glass & Plate Froster Model: FLG24HC-1-S


PLAN VIEW

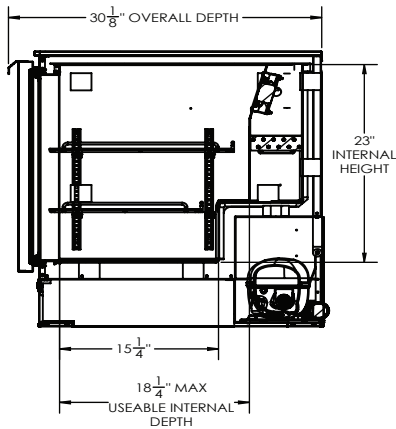

ELEVATION VIEW

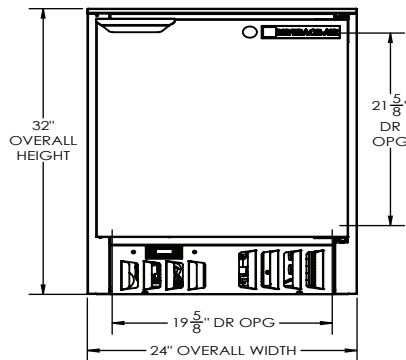

SIDE VIEW

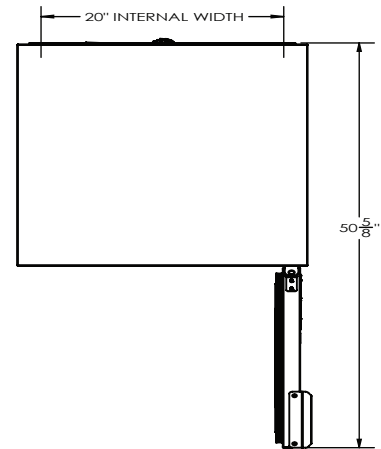

EXTERNAL DIMENSIONAL DATA	
Width Overall (in)	24"
Depth Overall (in)	30 1/8"
Height Overall (in)	32"
Number of Doors	1
Depth with Door open 90° (in)	50 5/8"
Door Openings (in)	19 5/8" x 21 5/8"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	5.06
Internal Width Useable (in)	20"
Internal Depth Overall (in)	18 1/4"
Internal Height Overall (in)	23"
Number of Shelves	2
12 oz. Mugs Chilling Capacity	80
8" Plate Chilling Capacity	100

*NOTE: Remote units are field wired and come with 6" legs.
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

ELECTRICAL DATA	
Full Load Amps	2.5
Voltage	115/60/2
Nema Plug (8' cord)	5-15P
REFRIGERATION DATA	
Horsepower	1/4
Capacity (BTU/Hr)	858
Heat Rejection (BTU/Hr)	1287
Charge (lbs/grams/ounces)	0.0992/45/1.59
SHIPPING DATA	
Gross Weight - Crated	208
Height - Crated (in)	45"
Width - Crated (in)	30"
Depth - Crated (in)	32"

ELECTRICAL CONNECTION



115/60/1
NEMA 5-15P

Unit pre-wired at factory
and include 8' long cord
and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 8/25 | Printed in U.S.A.