



# Horizon Elite™

self-contained 1010, 1410 series Chewblet® ice machine

## Features

### Horizon Elite

- 1010 series - up to 1061 pounds (482 kg) in 24 hours
- 1410 series - up to 1466 pounds (665 kg) in 24 hours
- automatically transport ice through a tube with RIDE® technology from up to 75' (22.8 m) away
- chewable, compressed nugget ice is preferred over cubes<sup>1</sup>
- Chewblet ice dispenses reliably from ice and beverage dispensers
- available with approximately 1.00" (2.54 cm) long standard Chewblet ice or optional 3/8" (0.95 cm) long Micro Chewblet™ ice
- environmentally responsible R404a refrigerant with zero ozone depletion potential
- quiet production without noisy harvest cycles

### Revolutionary, scale inhibiting design

- produces ice that has 15% the TDS of the incoming water for optimum dispensing and long life in drinks
- quarantines and regularly expels scale producing dissolved solids to dramatically reduce scale buildup
- increases time between descaling and reduces or eliminates the need for expensive scale treatment
- saves 35% water compared to comparable cubers
- meets 2018 Department of Energy regulations

### Durable, attractive ice machine

- regular bearing inspection or replacement is not required
- upgraded, easy-to-read LED operating status and diagnostic display

### Designed with sanitation in mind

- Agion® silver-based antimicrobial product protection of key ice and water contact components<sup>2</sup>
- floatless, sealed design inhibits formation of biofilms
- semi-automatic cleaning and sanitizing system

### Warranty

- 3 years parts and labor, 5 years compressor parts

### Certifications



## Short form specification:

Ice machine to be a Follett® Horizon Elite ice machine model \_\_\_\_\_  
 [Insert size/series, condenser type and installation/mounting, from model number guide] capable of producing compressed nugget ice using an efficient, sanitary horizontal evaporator/auger system and delivering ice by a flexible wire reinforced transport tube to □ ice storage bin, □ ice and water dispenser, □ ice and beverage dispenser, □ drop-in dispenser or □ Ice Manager™ diverter valve system, slide-out compressor/condenser/evaporator with utility docking station, front-mounted unit status display, evaporator water inlet at harvest end with automatic flush while producing ice, and semi-automatic cleaning and sanitizing system, plus all the features listed below and mounting/performance-enhancing accessories checked:

Horizon Elite self-contained 1010, 1410 series ice machine							
For use with <sup>1</sup>	Install/ mount	Condenser	V/Hz/Ph	1010 series	1410 series		
ice storage bin	top mount	air	220/60/1	HCC1010ABT†	HCC1410ABT†		
			230/50/1	HCE1010ABT	HCE1410ABT		
		water	220/60/1	HCC1010WBT	HCC1410WBT		
			230/50/1	HCE1010WBT	HCE1410WBT		
	RIDE	air	220/60/1	HCC1010ABS†	HCC1410ABS†		
			230/50/1	HCE1010ABS	HCE1410ABS		
Follett Vision™ dispenser	RIDE	air	220/60/1	HCC1010AVS†	HCC1410AVS†		
			230/50/1	HCE1010AVS	HCE1410AVS		
		water	220/60/1	HCC1010WVS	HCC1410WVS		
			230/50/1	HCE1010WVS	HCE1410WVS		
		ice and beverage dispenser (by others)	top mount <sup>2</sup>	air	220/60/1	HCC1010AHT†	HCC1410AHT†
					230/50/1	HCE1010AHT	HCE1410AHT
water	220/60/1			HCC1010WHT	HCC1410WHT		
	230/50/1			HCE1010WHT	HCE1410WHT		
RIDE	air		220/60/1	HCC1010AHS†	HCC1410AHS†		
			230/50/1	HCE1010AHS	HCE1410AHS		
drop-in dispenser (by others)	RIDE	water	220/60/1	HCC1010WHS	HCC1410WHS		
			230/50/1	HCE1010WHS	HCE1410WHS		
		air	220/60/1	HCC1010AJS†	HCC1410AJS†		
			230/50/1	HCE1010AJS	HCE1410AJS		
		water	220/60/1	HCC1010WJS	HCC1410WJS		
			230/50/1	HCE1010WJS	HCE1410WJS		
Ice Manager diverter valve system	RIDE	air	220/60/1	HCC1010AMS†	HCC1410AMS†		
		water	220/60/1	HCC1010WMS	HCC1410WMS		
† ENERGY STAR® certified							
<sup>1</sup> Ordered separately							
<sup>2</sup> Requires Harmony™ top kit (see page 4 for part number)							
NOTE: For Micro Chewingblet ice, replace second character (C) with an M e.g. HMC1010ABT							

† ENERGY STAR® certified

<sup>1</sup> Ordered separately

<sup>2</sup> Requires Harmony™ top kit (see page 4 for part number)

NOTE: For Micro Chewblet ice, replace second character (C) with an M e.g. HMC1010ABT

Job

Item

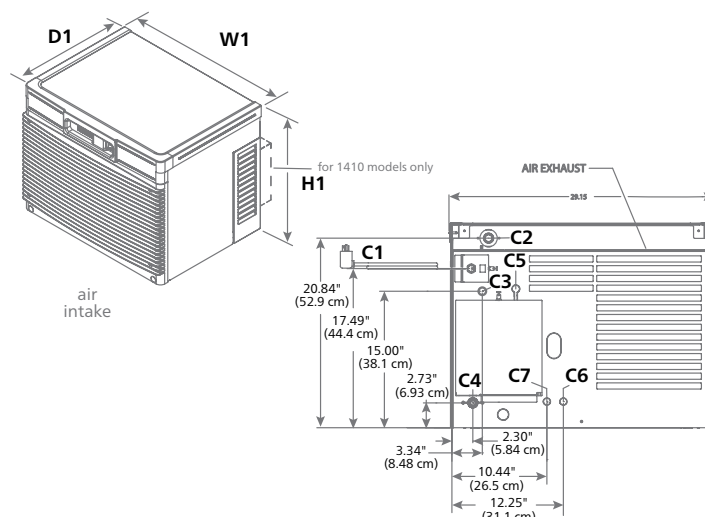
<sup>1</sup> Independent third party studies. Contact Follett for details.

<sup>2</sup> Disclaimer: Antimicrobial protection is limited to the treated components and does not treat water or ice.

## Accessories

- ☐ Harmony conversion top kit for ice and beverage dispensers (listed on page 4)
- ☐ Water filter kit (item# 00978957– see form# 9905)
  - \_\_\_\_ ea. extra primary water filter cartridge
  - \_\_\_\_ ea. extra pre-filter cartridge
- ☐ Carbonless water filter kit (item# 01050442 – see form# 6380)
- ☐ Wall mount bracket (item# 01085455)
- ☐ Ice machine stand, height-adjustable (item# 01085463)
- ☐ Longer ice transport tube (10' 3/4 m is standard) – Specify length: \_\_\_\_ ft/m in 5' 1.5 m increments (item# 0017896)
- ☐ SafeCLEAN Plus™ environmentally responsible ice machine cleaner/sanitizer (item# 01050863)
- ☐ SaniSponge™, 24 sanitary sponges (item# 01075431)
- ☐ Timer to control one or two 1010 and 1410 ice machines (item# 00967265)

## Dimensional drawing


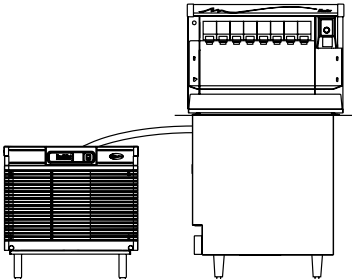


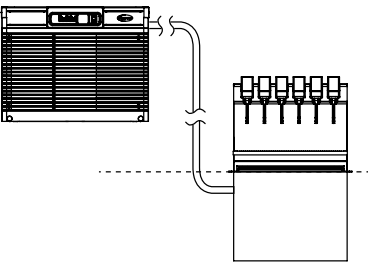



## Specification

	Horizon Elite 1010 series	Horizon Elite 1410 series
<b>W1</b> Width	29.15" (74.0 cm)	29.15" (74.0 cm)
<b>D1</b> Depth	23.25" (59.1 cm)	25.15" (63.9 cm)
<b>H1</b> Height	22.50" (57.2 cm)	22.50" (57.2 cm)
Clearance	top, left and right – 1.00" (2.54 cm)	top, left and right – 1.00" (2.54 cm)
Electrical 220 V/60/1 – HCC models	<b>C1</b> 11 amps, requires dedicated 15 amp circuit, 6' (1.8 m) cord, NEMA 6-15 plug.	<b>C1</b> 14 amps, requires dedicated 20 amp circuit, 6' (1.8 m) cord, NEMA 6-20 plug.
Electrical 230 V/50/1 – HCE models	<b>C1</b> 11 amps, requires dedicated 15 amp circuit, 6' (1.8 m) cord only, no plug.	<b>C1</b> 14 amps, requires dedicated 20 amp circuit, 6' (1.8 m) cord only, no plug.
<b>C2</b> Ice transport tube	see page 7 for details	see page 7 for details
<b>C3</b> Water inlet	3/8" OD push-in water inlet – internal connection	3/8" OD push-in water inlet – internal connection
<b>C4</b> Drain	3/4" MPT	3/4" MPT
<b>C5</b> Ice bin signal cord	for Vision applications only	for Vision applications only
Water-cooled ice machine connections	<b>C6</b> – 1/4" FPT condenser inlet <b>C7</b> – 1/4" FPT condenser outlet	<b>C6</b> – 1/4" FPT condenser inlet <b>C7</b> – 1/4" FPT condenser outlet
Air temperature	50 - 100 F (10 - 38 C)	50 - 100 F (10 - 38 C)
Water temperature	45 - 90 F (7 - 32 C)	45 - 90 F (7 - 32 C)
Potable water pressure	10 - 70 psi (69 - 483 kPa)	10 - 70 psi (69 - 483 kPa)
Condenser water pressure	30 - 150 psi (207-1034 kPa)	30 - 150 psi (207-1034 kPa)
Ice production	see ice production charts on page 8	see ice production charts on page 8
Energy consumption 90 F (32 C) air, 70 F (21 C) water	air-cooled models – 4.80 kWh water-cooled models – 4.20 kWh per 100 lb (45.4 kg) ice	air-cooled models – 4.84 kWh water-cooled models – 3.80 kWh per 100 lb (45.4 kg) ice
Heat rejection	air-cooled models – 11,300 BTU/hr water-cooled models – 12,800 BTU/hr	air-cooled models – 16,000 BTU/hr water-cooled models – 16,400 BTU/hr
Water consumption	12.0 gal (45 L) of potable water per 100 lb (45.4 kg) of ice (per AHRI test standards) 12.4 gal (46.9 L) at low TDS flush setting	12.0 gal (45 L) of potable water per 100 lb (45.4 kg) of ice (per AHRI test standards) 12.3 gal (46.5 L) at low TDS flush setting
Water flow requirement for water-cooled models	1 gallon per minute	1 gallon per minute
Approximate ship weight	275 lb (124 kg)	305 lb (138 kg)
NOTE: For indoor use only		

# 1 – Locating the ice machine

Horizon Elite self-contained Chewblet ice machines allow top-mounting or mounting in a base cabinet, on a wall or on a floor stand up to 75' (22.8 m) from the dispenser or ice bin with RIDE technology. In-cabinet mounting (RIDE applications) require special attention to service access, unit ventilation and ice tube runs (see pages 4-7).

Top mounting – ice and beverage dispensers (by others)	RIDE model – Follett low-profile Vision ice and beverage dispensers	Top mount on Follett ice storage bins
		
<b>Important specifier notes:</b> <ol style="list-style-type: none"> <li>1. Dispenser must be compatible with nugget ice. See page 4 for compatible ice and beverage dispenser models and top kit numbers.</li> <li>2. Verify ceiling or soffit height to ensure sufficient top clearance.</li> </ol>	<b>Important specifier notes:</b> <ol style="list-style-type: none"> <li>1. See page 4-6 for critical clearance and venting requirements.</li> </ol>	<b>Important specifier notes:</b> <ol style="list-style-type: none"> <li>1. See form# B300 for bin sizing.</li> <li>2. Verify ceiling or soffit height to ensure top clearance.</li> <li>3. Locate floor sink or grate and drains in front of storage bin.</li> <li>4. Do not position bin drain lines to block Ice•Device™ bin cart.</li> </ol>
RIDE model – ice and beverage dispensers (by others)	RIDE model – drop-in beverage dispensers (by others)	RIDE model – Follett ice storage bins
		
<b>Important specifier notes:</b> <ol style="list-style-type: none"> <li>1. Dispenser must be compatible with nugget ice. Compatible dispensers include Coca-Cola Freestyle 9000, Cornelius DB/ID/DF150/175, Lancer 4500-22N, FS-16N, FS-22N and FS-44N, Servend MD150/175/200/250, SV175/200/250, MDH-402 and Follett Symphony Plus™ 110CM, as well as dispensers listed on page 4.</li> <li>2. Top kit MSF30SC required with Coca-Cola Freestyle 7000. Adapter 0002832 must also be ordered from Coca-Cola.</li> <li>3. See page 4-6 for critical clearance and venting requirements.</li> <li>4. RIDE application is approved only for Pepsi Spire 3.0 and 5.0 designed for top mount ice machines and requires MSP24SC for 3.0 and MSP30SC for 5.0, ordered separately. For manual fill versions of Pepsi Spire 3.0 and 5.0, contact factory.</li> </ol>	<b>Important specifier notes:</b> <ol style="list-style-type: none"> <li>1. Compatible with the following dispensers: Cornelius 1522, 1722, 2323, and Lancer 2200, 2300, 23300.</li> <li>2. Require 12.00" (30.5 cm) of access space for installation on transport tube side.</li> <li>3. See page 4-6 for critical clearance and venting requirements.</li> </ol>	<b>Important specifier notes:</b> <ol style="list-style-type: none"> <li>1. See form# B300 for bin sizing.</li> <li>2. Locate floor sink or grate and drains in front of storage bin.</li> <li>3. Do not position bin drain lines to block Ice•Device bin cart.</li> </ol>

## 1 – Locating the ice machine (continued)

Top mounting – compatible ice and beverage dispensers <sup>1</sup>					
Manufacturer	Model Number	Width in (cm)	Depth <sup>2</sup> in (cm)	Height <sup>3</sup> in (cm)	Harmony top kit – specify "F" for front facing, or "B" for backward facing units
					1010 and 1410 series
Coca-Cola dispensers	Freestyle 7000	30.10 (76.5)	33.11 (84.1)	47.00 (119.38)	H30F30-F <sup>4</sup>
Cornelius dispensers	DB/ED/DF 200 series	30.00 (76.2)	30.00 (76.2)	34.38 (87.3)	H30C30-F
	DB/ED/DF 250 series	30.00 (76.2)	30.00 (76.2)	38.38 (97.5)	H30C30-F
	DB/ED/DF 300 series	44.0 (111.8)	30.00 (76.2)	34.00 (86.4)	H30C44-(F or B)
	FlavorFusion / Overload	30.00 (76.2)	30.70 (78.0)	39.38 (100.0)	H30C30-F-FF
	IDC215	30.00 (76.2)	30.70 (78.0)	39.38 (100.0)	H30C30-F-IDC
	IDC255 and Pro Fast Gate <sup>5</sup>	30.00 (76.2)	30.70 (78.0)	36.38 (92.4)	H30C30-F-IDC
Lancer dispensers	4500-30N	30.00 (76.2)	30.50 (77.5)	36.50 (92.7)	H30L30-F
	FS-30N	30.00 (76.2)	30.50 (77.5)	42.13 (107.0)	H30L30-F
	Sensation	30.00 (76.2)	31.00 (78.7)	38.25 (97.2)	H30L30-STP
	Touchpoint	32.50 (82.6)	33.70 (85.6)	40.00 (101.6)	H30L30-STP
Pepsi dispensers	Spire 5.0	30.50 (77.5)	36.00 (91.4)	42.75 (108.6)	H30P30-F
Servend dispensers	MDH-302	42.80 (108.7)	31.00 (78.7)	32.38 (82.2)	H30S44-(F or B)

<sup>1</sup> All approved dispensers can be filled with a RIDE model Horizon Elite ice machine without a top kit except for Coca-Cola Freestyle 7000 and Pepsi Spire 3.0 and 5.0, see page 4 for details.

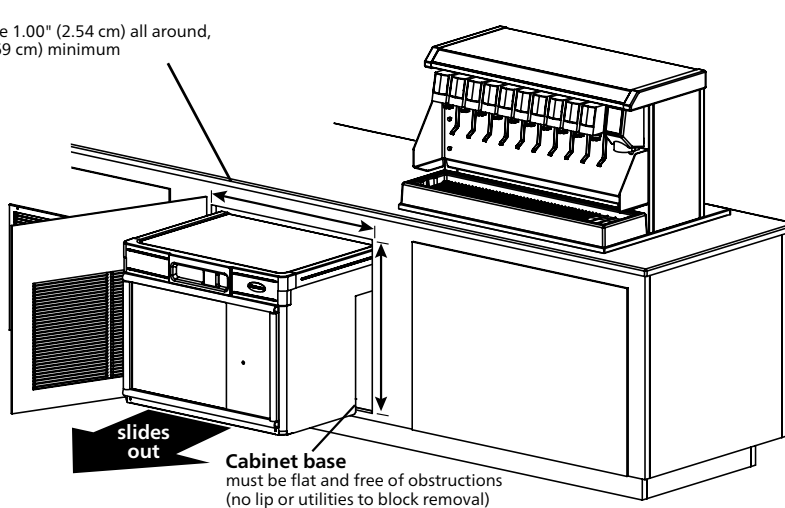
<sup>2</sup> Requires minimum 1.00" (2.54 cm) clearance between back of dispenser and wall.

<sup>3</sup> Net height after installation of top kit (excluding height of ice machine).

<sup>4</sup> Adapter must also be ordered from Coca-Cola (item# 0002832).

<sup>5</sup> Contact factory regarding IDC Pro.

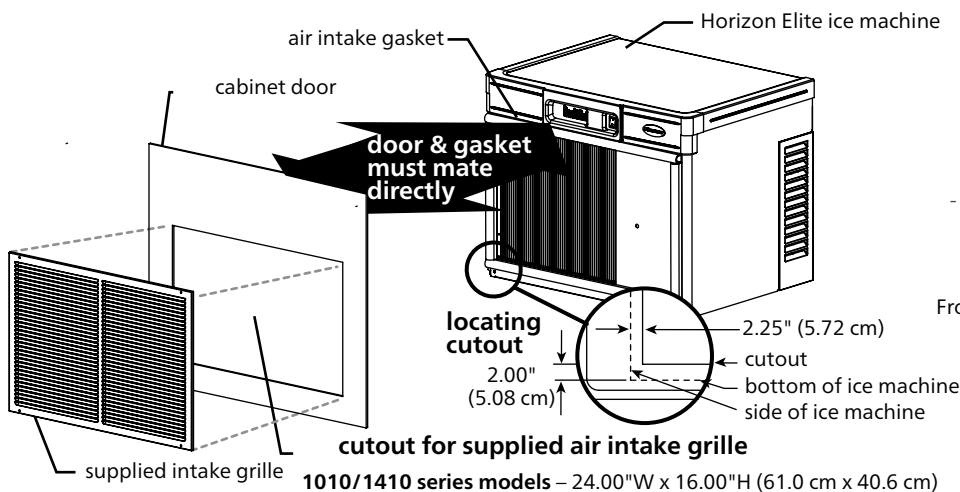
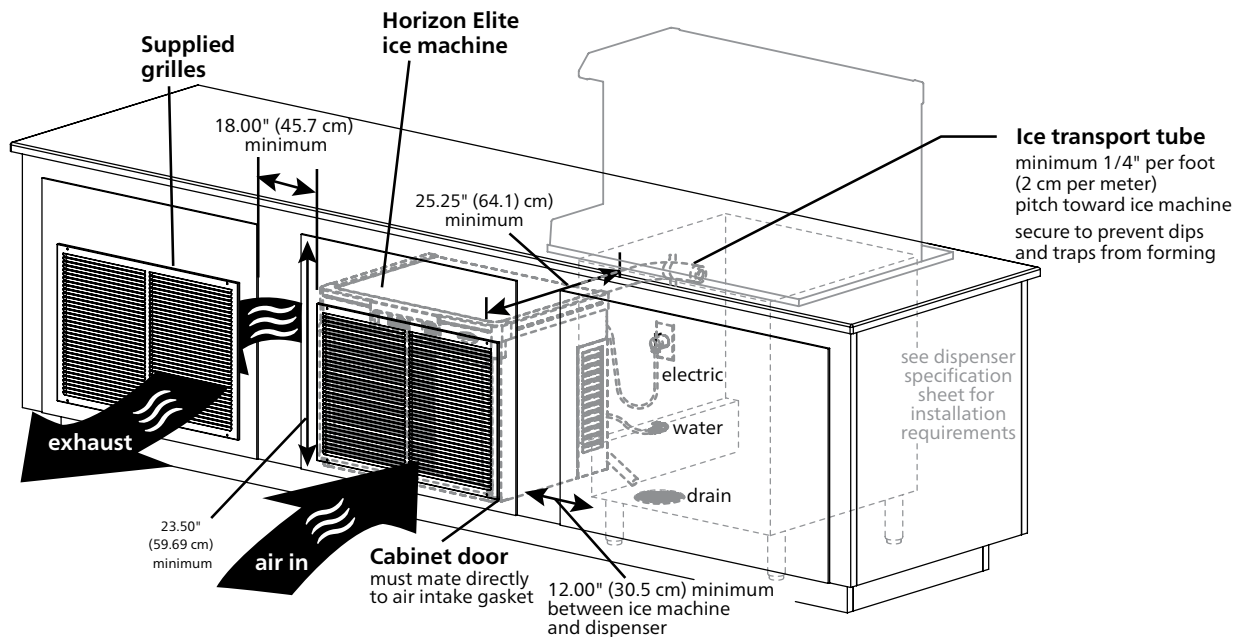
## 2 – Undercounter/in-cabinet mounting

Cabinet details	
Important specifier notes	<p><b>Cabinet door opening</b>  <b>1010/1410 series models</b> require 1.00" (2.54 cm) all around, 31.00"W x 23.5"H (78.7 cm x 59.69 cm) minimum</p>  <p>1. Cabinet door opening must meet minimum size requirements shown and be free of obstructions to allow ice machine to slide out (no lip or utilities to block removal).</p> <p>2. Cabinet base must be capable of supporting ice machine and allow ice machine to rest flat on cabinet bottom.</p> <p>3. No counter supports, electric or plumbing can run in front of the ice machine.</p>

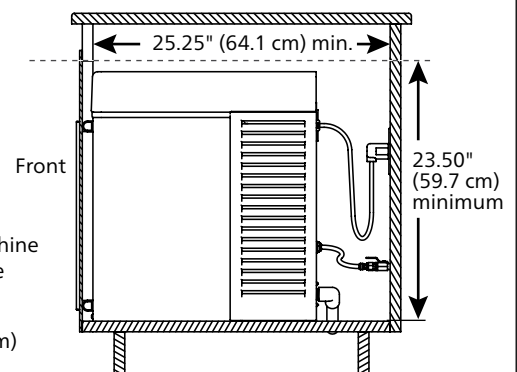
### 3 – Undercounter/in-cabinet mounting and ventilation

#### Using Follett supplied grilles

Horizon Elite ice machines can be installed undercounter/in-cabinet to fill bins or dispensers using RIDE technology. Care must be taken to ensure proper cabinet venting to avoid recirculation of hot air. Improper venting can cause ice machine outages.



#### Completed installation with gasket and door in place – Side view



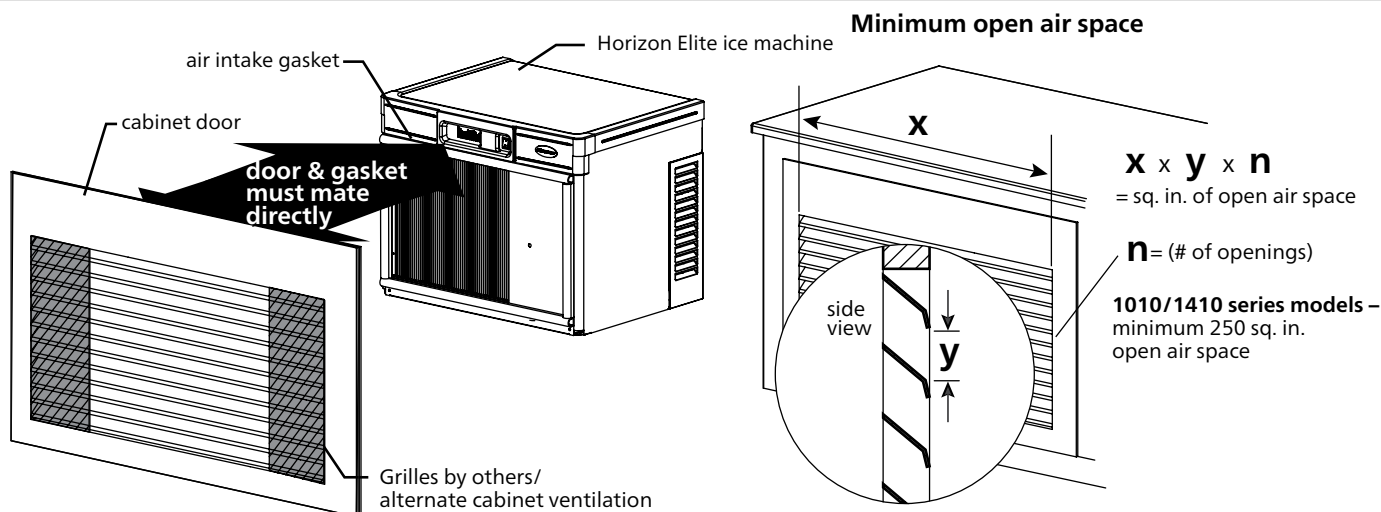
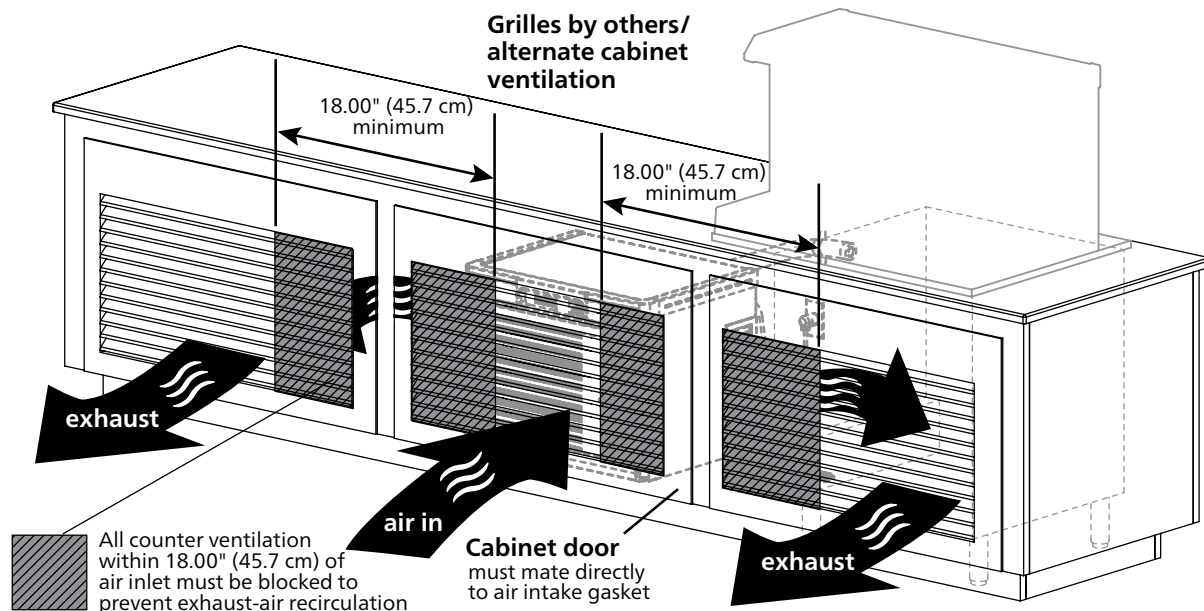
#### Important specifier notes for using Follett supplied grilles:

1. The supplied exhaust grille must be located at least 18.00" (45.7 cm) from the supplied air intake grille (exhaust air must not recirculate with intake air).
2. Cabinet interior must be open to allow for unrestricted exhaust air flow.
3. Ice transport tube needs minimum 1/4" per foot (2 cm per meter) pitch toward ice machine and should be secured to prevent dips and traps from forming.
4. Cabinet door must mate directly to air intake gasket.
5. Cabinet interior must provide a minimum clear space of 23.50" (59.7 cm) high by 25.25" (64.1 cm) deep.
6. Cutout for supplied grilles must meet minimum size requirements shown above.
7. Utilities should be conveniently located as shown.

### 3 – Undercounter/in-cabinet mounting and ventilation (continued)

#### Using grilles by others/alternate cabinet ventilation

Cabinets with ventilation or louvers other than those provided require special consideration to provide proper ventilation. Recirculation of hot air will reduce ice machine performance and can cause ice machine outages.

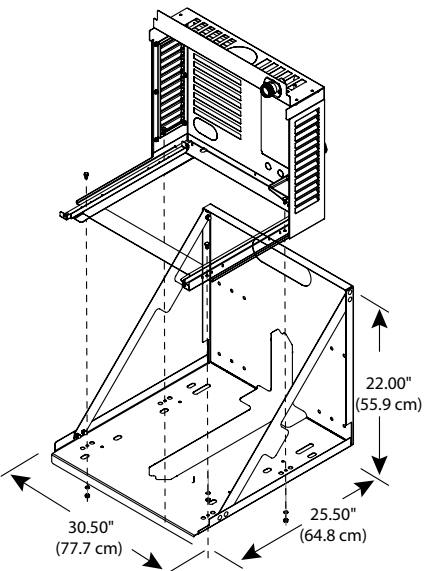
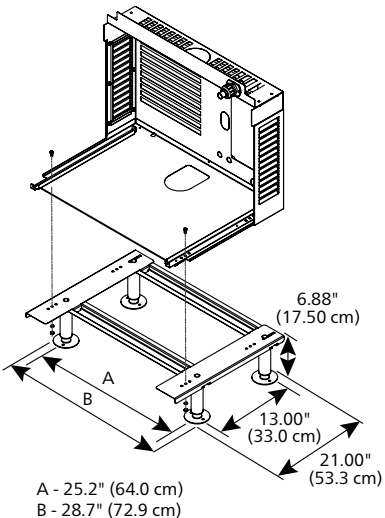


#### Important specifier notes for using grilles supplied by others/alternate cabinet ventilation:

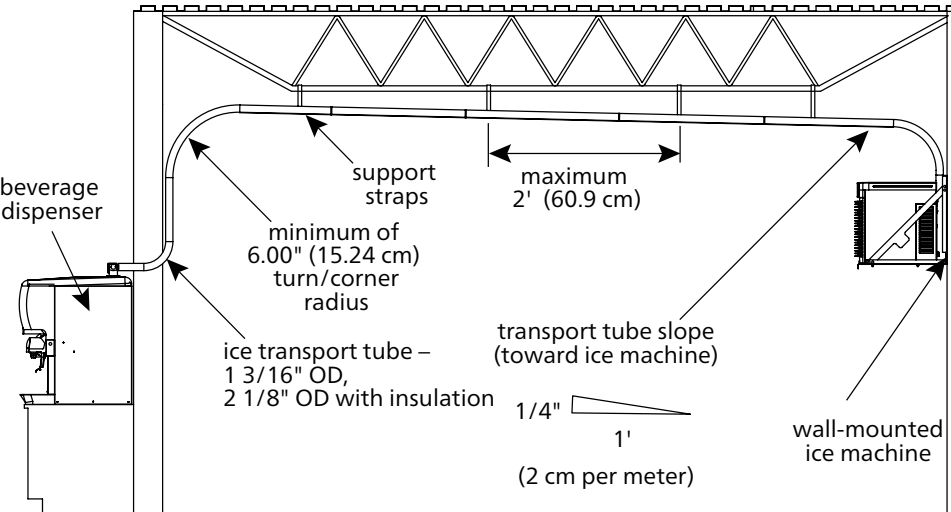
1. Exhaust must be at least 18.00" (45.7 cm) from air intake (exhaust air must not recirculate with intake air).
2. Cabinet interior must be open to allow for unrestricted exhaust air flow.
3. Ice transport tube needs minimum 1/4" per foot (2 cm per meter) pitch toward ice machine and should be secured to prevent dips and traps from forming.
4. Ducting must be provided if cabinet door does not mate directly to air intake gasket.
5. Cabinet interior must provide a minimum clear space of 23.50" (59.7 cm) high by 25.25" (64.1 cm) deep.
6. Grilles by others must meet minimum requirements for open air space shown above.
7. Utilities should be conveniently located as shown.



4 – Horizon Elite ice machine mounting accessories

Optional wall mount bracket	Optional machine stand	Important specifier notes:
		<p><b>Important specifier notes:</b></p> <ol style="list-style-type: none"><li>1. For secure wall mounting, specify optional wall mount bracket.</li><li>2. Wall and fasteners must support the weight of the ice machine, bracket, supply water and ice. Use of a backing board may be required with hollow wall construction.</li><li>3. Machine stand mounting adds 6.88" (17.48 cm) to height of ice machine.</li><li>4. No dips in tube routing allowed.</li><li>5. Ice transport tube needs minimum 1/4" per foot (2 cm per meter) pitch toward ice machine and should be secured to prevent dips and traps from forming.</li></ol>

5 – Horizon Elite ice tube runs - specifier guidelines

Long tube runs for RIDE remote ice delivery equipment	Important specifier notes:
	<p><b>Important specifier notes:</b></p> <ol style="list-style-type: none"><li>1. 75' (22.8 m) maximum ice transport tube run.</li><li>2. Tubing routing bends must have a 6.00" (15.24 cm) radius or larger.</li><li>3. If not supported from underneath, secure insulated ice transport tube at least every 2' (60.9 cm) to prevent dips or traps.</li><li>4. Relative humidity levels above 80% in areas where the ice machine or ice transport tube is located may produce excessive condensation that will cause water damage.</li><li>5. Contact factory for recommendations on running tubing through a decorative soffit or chase.</li></ol>

## Ice production – Horizon Elite 1010 series, air-cooled

Inlet water temperature F (C)	Ambient air temperature F (C)					
	60 (16)	70 (21)	80 (27)	90 (32)	100 (38)	
50 (10)	1160 (526)	1061 (481)	962 (436)	825 (374)	688 (312)	lb/kg production in 24 hr
60 (16)	1093 (496)	1001 (454)	909 (412)	795 (361)	681 (309)	
70 (21)	1026 (465)	941 (427)	857 (389)	765 (347)	674 (306)	
80 (27)	971 (440)	893 (405)	815 (370)	730 (331)	644 (292)	
90 (32)	917 (416)	841 (427)	773 (350)	694 (315)	614 (279)	

## Ice production – Horizon Elite 1410 series, air-cooled

Inlet water temperature F (C)	Ambient air temperature F (C)					
	60 (16)	70 (21)	80 (27)	90 (32)	100 (38)	
50 (10)	1593 (723)	1466 (665)	1339 (607)	1230 (558)	1121 (508)	lb/kg production in 24 hr
60 (16)	1518 (689)	1396 (633)	1275 (579)	1163 (528)	1052 (478)	
70 (21)	1442 (654)	1327 (602)	1211 (549)	1097 (498)	982 (446)	
80 (27)	1394 (632)	1272 (577)	1150 (522)	1050 (477)	950 (431)	
90 (32)	1345 (610)	1327 (602)	1089 (494)	1004 (456)	918 (417)	

## Ice production – Horizon Elite 1010 series, water-cooled

Potable water temperature F (C)	Condenser water temperature F (C)					
	60 (16)	70 (21)	80 (27)	90 (32)	100 (38)	
50 (10)	1096 (498)	1043 (473)	1001 (454)	947 (430)	892 (405)	lb/kg production in 24 hr
60 (16)	1006 (457)	970 (440)	938 (426)	888 (403)	839 (381)	
70 (21)	917 (416)	898 (408)	874 (396)	830 (377)	786 (357)	
80 (27)	874 (397)	826 (375)	826 (375)	787 (357)	749 (340)	
90 (32)	831 (377)	778 (353)	778 (353)	745 (338)	712 (323)	

## Ice production – Horizon Elite 1410 series, water-cooled

Potable water temperature F (C)	Condenser water temperature F (C)					
	60 (16)	70 (21)	80 (27)	90 (32)	100 (38)	
50 (10)	1436 (652)	1411 (641)	1385 (607)	1370 (622)	1354 (615)	lb/kg production in 24 hr
60 (16)	1417 (643)	1367 (633)	1318 (621)	1307 (593)	1296 (588)	
70 (21)	1397 (634)	1324 (602)	1251 (568)	1245 (565)	1238 (562)	
80 (27)	1318 (598)	1253 (577)	1189 (540)	1170 (531)	1151 (522)	
90 (32)	1238 (562)	1183 (602)	1127 (512)	1096 (497)	1064 (483)	



ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency.

Agion is a registered trademark of Sciescent LLC.

Harmony, Horizon Elite, Ice•Devilce, Ice Manager, Micro Chewblet, SafeCLEAN, SaniSponge, Symphony Plus, and Vision are trademarks of Follett LLC.

Chewblet, Follett and RIDE are registered trademarks of Follett LLC, registered in the US.

Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

## Self-contained 1010, 1410 series ice machine