



## 36" GLASS FROSTER



|           |
|-----------|
| JOB       |
| AREA      |
| ITEM NO.  |
| MODEL NO. |

| MODELS        |
|---------------|
| FR36RT-SS-STK |



FR36RT-SS-STK

### KEY PRODUCT FEATURES AND BENEFITS

- Heavy duty construction – stainless steel interior and top
- 2" foamed-in-place eco-friendly insulation provides energy savings with zero ozone depletion
- Unique door frame heater eliminates condensation build up on door
- All stainless steel interior front and sides with galvanized back
- Heavy gauge dent resistant doors
- Controller adjustable from -10°F - 10°F; Factory set at 0°F
- Manual 6-hour defrost system prevents interior ice buildup
- Floor racks standard; shelving must be ordered separately if needed (2 shelves recommended)
- Optional third shelf for 25% more glass storage
- Ultra quiet, high-efficiency, and eco-friendly R290 refrigeration system

### Quick Features

- Plug-in installation, no condensate plumbing required
- 1 Year Parts and Labor Warranty, 5 Year Compressor Warranty



## 36" GLASS FROSTER

MODEL NUMBERS - FR36RT-SS-STK

| MODEL NUMBERS                            |                                                              | FR36RT-SS-STK                                                                                                                                                                                                             |
|------------------------------------------|--------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EXTERIOR CABINET DIMENSIONS              | Length - in. (mm)                                            | 36 (914)                                                                                                                                                                                                                  |
|                                          | Depth - in. (mm)                                             | 24 (610)                                                                                                                                                                                                                  |
|                                          | Height - in. (mm)                                            | 34-1/8 (866)                                                                                                                                                                                                              |
| INTERNAL NET VOLUME - cubic ft. (liters) |                                                              | 8.6 (242)                                                                                                                                                                                                                 |
| PLATE CAPACITY *                         |                                                              | 215 Plates                                                                                                                                                                                                                |
| GLASS CAPACITY *                         |                                                              | 142 Glasses                                                                                                                                                                                                               |
| W/ OPTIONAL THIRD SHELF                  |                                                              | 172 Glasses                                                                                                                                                                                                               |
| SHIPPING WEIGHT LBS. (KG.)               |                                                              | 245 (111)                                                                                                                                                                                                                 |
| CABINET CONSTRUCTION (INTERIOR)          |                                                              | All models have stainless steel walls and floor.                                                                                                                                                                          |
| CABINET CONSTRUCTION (EXTERIOR)          |                                                              | <b>Stainless Steel Option:</b> Front and ends are stainless steel, back and bottom are galvanized.                                                                                                                        |
| DOORS AND HARDWARE                       |                                                              | Sliding style open. Stainless steel top and bottom pans. Die cast handle                                                                                                                                                  |
| PLUMBING                                 |                                                              | No drain required. Condensate evaporates automatically.                                                                                                                                                                   |
| INSULATION                               |                                                              | 2 inch foamed-in-place, environmentally friendly Ecomate® polyurethane insulation.                                                                                                                                        |
| VENTILATION                              |                                                              | FR24 model is front vented, all other models require 2" clearance from wall on either left end or back of cabinet for proper air flow.                                                                                    |
| TEMPERATURE SPECIFICATIONS               | Default Temperature Setpoint: Standard Temp Models - °F [°C] | 0 [-17.75]                                                                                                                                                                                                                |
|                                          | Adjustable Setpoint Range: Standard Temp Models - °F [°C]    | (-) 10 to (+)10 [-23.3 to -12.2]                                                                                                                                                                                          |
| ELECTRICAL SPECIFICATIONS                | Supply                                                       | 120 VAC/60 Hz/1 Ph                                                                                                                                                                                                        |
|                                          | Running Load Amps                                            | 3.8                                                                                                                                                                                                                       |
|                                          | Power Cord                                                   | 6-foot length with NEMA 5-15 plug.                                                                                                                                                                                        |
|                                          | Thermostat                                                   | NSF Listed electronic control.                                                                                                                                                                                            |
|                                          | Automatic Defrost                                            | Automatic electric defrost every 4 hours for approximately 20 minutes.                                                                                                                                                    |
|                                          | Manual Defrost                                               | Push button defrost system, manually initiated at the end of each day. Automatically terminates after six hours.                                                                                                          |
| REFRIGERATION SPECIFICATIONS             | Condensing Unit                                              | Hermetic condensing unit pulls out for service and cleaning.                                                                                                                                                              |
|                                          | Expansion Device                                             | Capillary Tube                                                                                                                                                                                                            |
|                                          | Refrigerant                                                  | R290                                                                                                                                                                                                                      |
|                                          | Refrigerant Charge (g)                                       | 100                                                                                                                                                                                                                       |
|                                          | Compressor H.P.                                              | 1/4                                                                                                                                                                                                                       |
|                                          | Total Heat of Rejection At 75°F ambient (BTU/h)              | 1625                                                                                                                                                                                                                      |
| OPTIONAL ACCESSORIES                     |                                                              | Flat shelving • Divider shelving • Roller basket shelving<br>Set of 4 Adjustable legs (Multiple sizes available)<br>Set of 4 Casters w/ brakes (Multiple sizes available) • 2; 3; 4; and 5' Bottle Rail (field Installed) |

\* Capacity based on use of 3" diameter glass and 9-1/2" diameter X 1/2" thick plate.

# This product is evaluated by NSF for the chilling of glassware and plates. This product is not intended for the storage of food products.

### ! WARNING: California Prop 65 Notice


These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at [perlick.com](http://perlick.com). Or to find out more about Prop 65, go to [P65Warnings.ca.gov](http://P65Warnings.ca.gov).

Form No. Z2919  
Rev. 06.08.23




36" GLASS FROSTER

36" CABINET

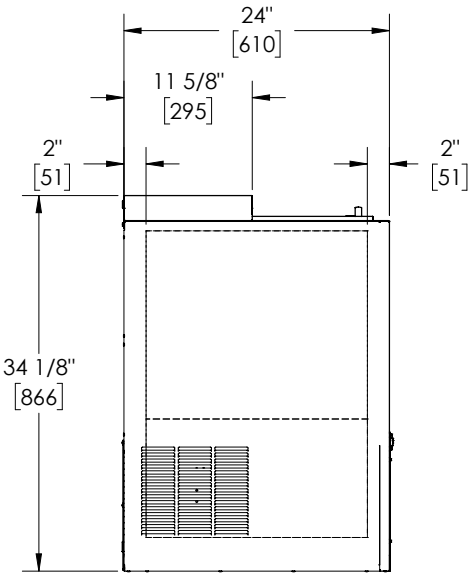

END VIEW\*  
36", 48", 60"  
CABINET

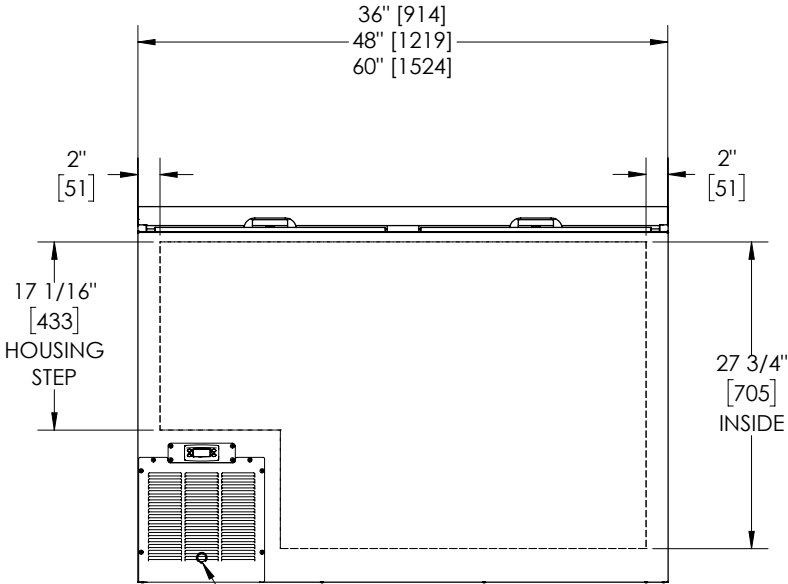

POWER CORD EXIT  
(BACK OF UNIT)  
FRONT VIEW\*  
36", 48", 60"  
CABINET