



# 14 GAUGE STAINLESS STEEL SIX STATION WALL MOUNTED SINK WITH TUBULAR SUPPORTS KNEE OPERATED

Item #: \_\_\_\_\_ Qty #: \_\_\_\_\_  
Model #: \_\_\_\_\_  
Project #: \_\_\_\_\_



KNEE-VALVE OPERATED

## FEATURES:

- 8 1/2" high backsplash.
- 8" sink bowl depth.
- Three stainless steel "Z" brackets supplied each unit.
- Three **K-6** 3 1/2" rear basket drains.
- Four tubular stainless steel support brackets that allow full clearance underneath.

**Knee Operated:** Includes six **7-PS-32** knee valves and six **K-121** spouts.  
Single holes provided.

## CONSTRUCTION:

- All TIG welded.
- Welded areas blended to match adjacent surfaces and to a satin finish.
- Die formed tubular wall brackets.

## MATERIAL:

- All 14 gauge type "304" stainless steel.
- 1 5/8" tubular "304" stainless steel wall brackets.
- Stainless steel gussets.

## MECHANICAL:

- Single faucet holes.

| Model #     | Length | # of Spouts | # of Wall Supports | Wt.      | Cu. Ft. |
|-------------|--------|-------------|--------------------|----------|---------|
| FS-WM-120KV | 120"   | 6           | 4                  | 228 Lbs. | 42      |

[Click Here For Install Guide](#)



## MULTI-STATION ACCESSORIES & REPLACEMENT PARTS

| Model          | Description                                                  | QTY:  |
|----------------|--------------------------------------------------------------|-------|
| <b>7-PS-32</b> | Knee Valve Assembly                                          | _____ |
| <b>K-6</b>     | 3 1/2" Drain (1 1/2" I.P.S.)                                 | _____ |
| <b>K-06</b>    | Splash Mount Faucet Mounting Kit                             | _____ |
| <b>K-13</b>    | Stainless Steel Soap Dispenser (Wall Mount Only)             | _____ |
| <b>K-121</b>   | Single Hole, Splash Mounted 3-1/2" Gooseneck Spout           | _____ |
| <b>K-411</b>   | Strainer Plate for 3-1/2" Drain                              | _____ |
| <b>K-508</b>   | Special Sizing Charge (Larger Size Cut Down To Smaller Size) | _____ |
| <b>TA-19</b>   | Adjustable Stainless Steel Flanged Bullet Foot               | _____ |



K-121




7-PS-32



K-13



K-411



TA-19



K-06

= Ships UPS

Standard Faucets conform to NSF 61 Standard 9 and compliance to AB 1953 Standards.

**WARNING:** Equipment that include faucets on this page may contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.



Customer Service Available To Assist You **1-800-645-3166** 8:30 am - 8:00 pm E.S.T.

For Orders & Customer Service:

Email: [customer@advancetabco.com](mailto:customer@advancetabco.com) or Fax: 631-242-6900

For Smart Fabrication™ Quotes:

Email: [smartfab@advancetabco.com](mailto:smartfab@advancetabco.com) or Fax: 631-586-2933


REF-JJ

**TOL ± .500"**

**ALL DIMENSIONS ARE TYPICAL**

Side elevation drawing of a kitchen sink and faucet assembly. The drawing shows a single-basin sink with a curved faucet. Dimensions are indicated with arrows and text:

- Faucet height above the sink rim: 5"
- Sink rim height above the countertop: 28  $\frac{1}{2}$ "
- Sink width: 61  $\frac{1}{2}$ "
- Countertop thickness: 12"
- Drainage pipe diameter:  $\varnothing$
- Drainage pipe height below the countertop: 12"
- Drainage pipe diameter:  $\varnothing$

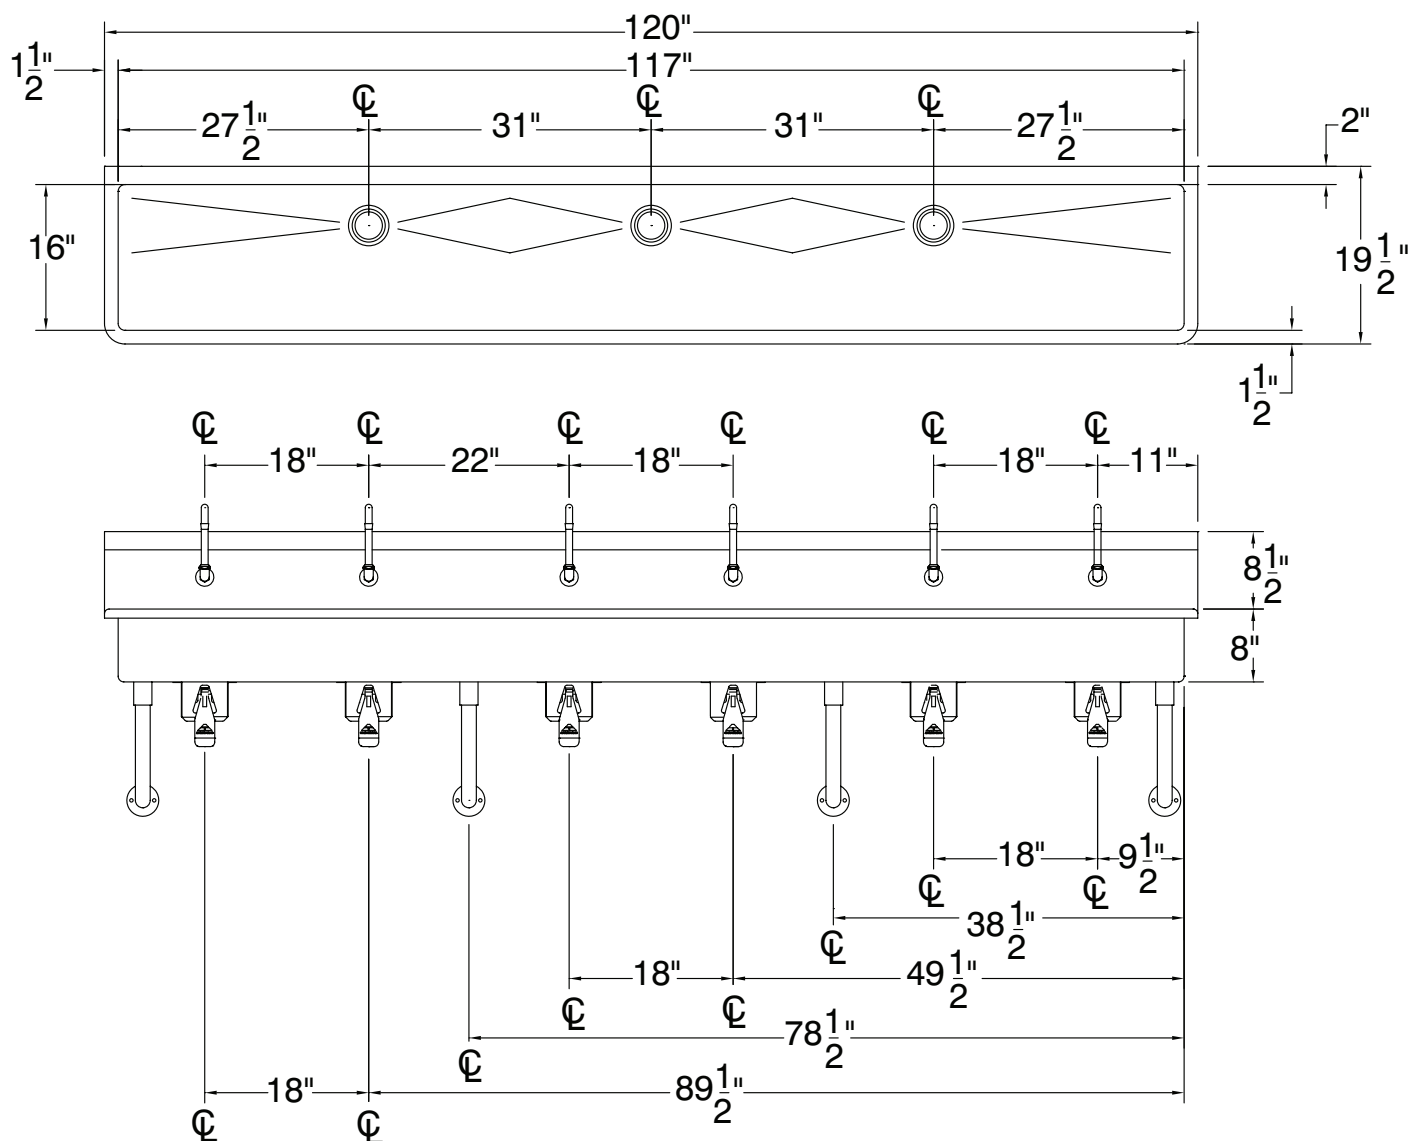

**228 Lbs.**



**REF-JJ** 200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, AUGUST 2018