

Garland Induction

INSTINCT SERIES - COUNTERTOP DUAL GRIDDLE 7 & 10kW

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- INSTINCT Griddle 7 (formerly SHDUGR7000)
- INSTINCT Griddle 10 (formerly SHDUGR10000)

powered by
INDUCS



INSTINCT Griddle 7 / 10

Standard Features

- Realtime Temperature Control System RTCsmp®
- Temperature setting from 120° to 450°F (50° to 230°C)
- Special 2-zone induction non-stick griddle
- Timer function
- Energy efficient
- Heats up quickly
- Instantaneous control of the temperature with no lag
- Uniform heat distribution
- Convenient and reliable
- Overheat protection
- Easy to clean
- LED Display
- Simple and intuitive "Tap and Turn" knob
- Includes plug and cord (6 ft. - 1.8 m)



Properties

- Reduced energy consumption thanks to high-efficiency induction technology with optimised energy transfer between the griddle and the food product
- Griddle comes with HPCR stainless steel surface protection
- Multi-point temperature measurement and temperature control accurate to one degree over the entire cooking time and the entire cooking surface for optimal frying results thanks to RTCsmp® technology
- Direct heat transfer eliminates heat in the area around the griddle
- Takes only 3-1/2 minutes to reach 392°F (200°C)
- Reduction of the maximum power from 100 % to 25 %
- Two separate temperature zones on the unit
- Automatic shut-off feature prevents overheating
- The griddle adjusts to the power available
- Warranty: 2 years on parts & labor (US and Canada only)

Advanced Features

- Even heat distribution across the entire cooking surface
- RTCsmp®v control / monitoring
- Height-adjustable, locking feet
- Removable, washable and reusable air filter
- Incoming Voltage Detection
- Easy Power Reduction
- Quiet ventilation for less noise


Included Features

- Spatter guard
- Spatula
- Stainless Steel sponge





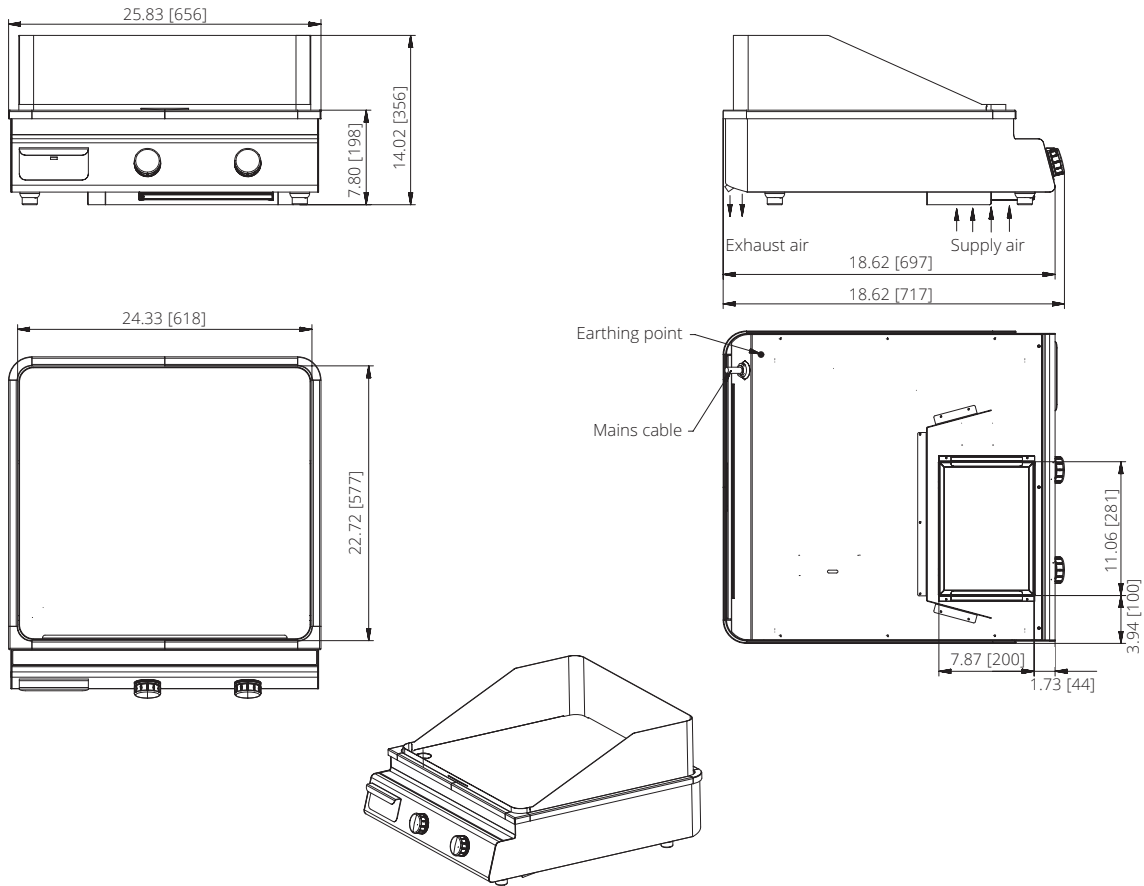

INSTINCT™
 GARLAND INDUCTION GRIDDLE (COUNTER-TOP), 2 FRYING ZONES 24.33 x 22.72 inches

Dimensions are specified in inches [mm]



Number of heating zones: 2
 Griddle surface: 24.33 x 22.72 inches [618 x 577 mm]
 Temperature setting: 120 to 450°F / 50 to 230°C
 Housing: Stainless Steel

Model	INSTINCT GRIDDLE 7		INSTINCT GRIDDLE 10	
Model Number	GIIC-DG7.0		GIIC-DG10	
Dimensions W (L) x D (P) x H	25.86 x 28.23 x 7.80 inches [656 x 717 x 198 mm]		25.86 x 28.23 x 7.80 inches [656 x 717 x 198 mm]	
Weight	106 lbs [48 kg]		106 lbs [48 kg]	
Electrical Specifications	3 Phases		3 Phases	
Power, Watts	2 x 3500W - 20 amp (max 3500, can be reduced individually)		2 x 5000W - 28 amp (max 5000, can be reduced individually)	
Electrical supply V/Hz	208-240 V/50-60 Hz/3	380-440 V/50-60 Hz/3	208-240 V/50-60 Hz/3	380-440 V/50-60 Hz/3
Certification Marks	UL	CE	UL	CE
Plug (to precise at time of order)	 NEMA 15-50P	 EU 5-Pole	 NEMA 15-50P	 NEMA 15-50P
Shipping Information				
Dimensions W (L) x D (P) x H	47.25 x 31.50 x 21.65 inches [1200 x 800 x 550 mm]		47.25 x 31.50 x 21.65 inches [1200 x 800 x 550 mm]	
Weight	150 lbs [68 kg]		150 lbs [68 kg]	

Note:
 Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only.
 Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Welbilt reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
 1177 Kamato Road,
 Mississauga, Ontario
 L4W 1X4 CANADA

General Inquiries 1-905-624-0260
USA Sales 1-800-424-2411
Canadian Sales 1-888-442-7526
US/Canada KitchenCare Parts & Service
1-844-724-2273

www.garland-group.com
 6583D
 06/20