

MANUAL GREASE TRAPS WITH BACTERIAL TREATMENT



BIO SERIES GGXM-25B

MANUAL GREASE TRAP WITH BACTERIAL TREATMENT

Superior Grease Management and Bio Treatment for Difficult Applications, including Coffee Shops, Ice Cream Stores, Confectionary Stores, and Restaurants



ASME
A112.14.3

Grease Guardian Bio Series Grease Traps incorporate proven grease trap technology with ASME/PDI approval with our unique dry solids strainer, grease level viewing window, and highly effective GB bacterial injection system.

The bacterial digesting treatment is a non-toxic, agent which helps digest fats oils and grease while eliminating odors in the kitchen wastewater.



Grease Guardian GGXM-25B

25 GPM - 60+
Pounds Grease
Capacity



Wall Mounted Automatic
Biological Dispenser

Bio Refills are required for the **GGXM** Bio Grease Traps, available in a 3 month pack or a 12 month pack. Each refill lasts one month.

Part# Bio-GB3 - 3 Month Bio Pack comprising of 3 Bio refills and 3 sets of batteries

Part# Bio-GB12 - 12 Month Bio Pack comprising of 12 Bio refills and 12 sets of batteries

First Bio-GB3 Bio Pack is included with GGXM-25B

304 Stainless Steel for superior hygiene

ASME 112.14.3 Approved

Integral Electronic Bacterial Control

Unique Dry Strainer design with front access

Globo viewing window - grease level monitoring

Fully sealed lid with quick access release clips

Compact Design for Under-sink Installations

MANUAL GREASE TRAPS WITH BACTERIAL TREATMENT




BIO SERIES - GGXM-25B

MANUAL GREASE TRAP WITH BACTERIAL TREATMENT


- ◆ Wall Mounted Automatic Biological Dispenser
- ◆ Grease Guardian Manual Grease Trap with grease level viewing window
- ◆ GGX has front access removable solids filter
- ◆ Uni-directional Inlets and Outlets conveniently located at the rear of the Grease Trap
- ◆ Hygienic Stainless Steel Grease Trap easily fits under sink / shelf




Dimensions

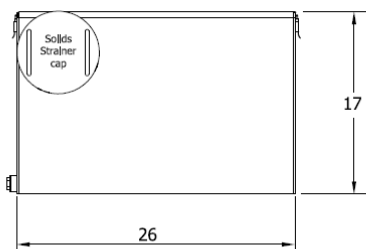

FRONT VIEW



END VIEW



TOP VIEW

TECHNICAL DATA

WEIGHT	60 pounds
MATERIAL	304 Stainless steel
INTERIOR	304 Stainless steel
FLOWRATE	25 gallons per minute
GREASE RETENTION	50+ pounds
SOLIDS STRAINER CAPACITY	6.6 pounds
TANK CAPACITY	16 gallons

GGXM STANDARD FEATURES

- 5 Year Warranty
- 16 Gauge stainless steel welded tank
- Fully sealed air tight system
- Universal flow direction
- Dry solids strainer
- Integral flow control
- Integral gas trap