




HALOTRON® I clean fire extinguishing agent discharges as a rapidly evaporating liquid, which is non-conductive, noncorrosive, and leaves behind no residue. Halotron® I is the clean agent market leader with a history of successful real-world protection of valuable assets. From model-scale aircraft to wide-body commercial aircraft, from data centers to pharmaceutical and other industrial plants, the Halotron® I agent has been used to extinguish the fire, limit damage, and help reduce downtime that can be caused by other agents.

Applications for these extinguishers include: data centers, laboratories, manufacturing plants, general office areas, computer rooms, telecommunication facilities, clean rooms, control rooms, warehouses, military electronics, vehicles including classic autos, boats, engine compartments, aircraft ramps, onboard aircraft, and in facilities that service aircraft and any facility where dry chemical extinguishers could cause unacceptable damage or contamination.

AVAILABLE IN 65 AND 150 LB. WHEELED EXTINGUISHERS

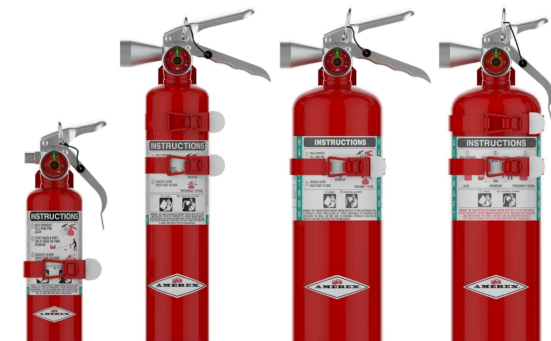

A384T
P/N 14400

B385TS
P/N 15231

B386T
P/N 15271

B394TS
P/N 16330

ALUMINUM VALVE



397
P/N 15509

398
P/N 15510

BRASS VALVE



RUGGED

- 6-Year manufacturer's warranty
- Stored-pressure design
- Dependable drawn-steel cylinders
- Durable high-gloss polyester powder paint
- All-metal valve construction
- Temperature range -40°F to 120°F

USER-FRIENDLY

- Maximum visibility during discharge
- No electrical conductivity back to the operator
- No thermal or static shock
- Leaves no residue
- QR coded and multilingual labels

ENVIRONMENT

- Low Global Warming Potential (GWP) 77 (CO₂ = 1.0, 100 year time horizon)
- Low Ozone Depletion Potential (ODP) - 0.0098 (CFC-11 = 1.0)
- Short atmospheric lifetime

OPTION

- Extinguishers are USCG approved with bracket listed on UL label
- Chrome cylinders (see chart below)

FAA APPROVED MODELS AVAILABLE (SEE CHART BELOW)

AGENT TYPE	HALOTRON® I					
VALVE TYPE	Anodized Aluminum				Chrome-Plated Brass	
DESIGN	Nozzle				Hose & Nozzle	
MODEL NUMBER	A384T	B385TS	B386T	B394TS	397	398
UL & ULC RATING	1B:C	2B:C	5B:C	5B:C	1A:10B:C	2A:10B:C
CAPACITY (LBS.)	1.4	2.5	5	5.5	11	15.5
*SHIPPING WT. (LBS.)	3.25	5.25	9.5	10	22.5	27.5
HEIGHT (IN.)	10	15.5	15.25	15	21.88	21.88
WIDTH (IN.)	3.5	6.38	5.75	5.13	9.25	9.25
DEPTH (IN.)	2.63	3	4.25	4.25	6	6
RANGE (INITIAL- FT.)	6-8	6-10	9-15	9-15	9-15	12-18
DISCHARGE TIME (SEC.)	9	9	9	9	9	14
OPTIONAL CHROME CYLINDER	Yes	Yes	Yes			
MINIMUM CONFINED SPACE REQUIREMENTS (CU. FT.)	196	350	700	770	1540	2170
NOMINAL OPERATING PRESSURE	125 PSIG	100 PSIG	100 PSIG	150 PSIG	125 PSIG	125 PSIG
FAA APPROVED MODEL				Yes	Yes	Yes
INCLUDED BRACKET	Vehicle	Vehicle	Vehicle	Aircraft	Wall	Wall

MANUFACTURED AND TESTED TO UL STANDARDS
COMPLIES WITH NFPA 10 STANDARD
ISO-9001/ ISO-14001 CERTIFIED
UL LISTED

CONFORMS TO TEST STANDARDS:
CAN/ULC-S566 - UL 2129 &
CAN/ULC-S508 - UL 711

*Shipping weight includes box.

