

### Flav-R 2-Go<sup>®</sup> Locker System - Countertop

Models: F2G-3-A, -22-A, -32-A F2G-3-C, -22-C, -32-C

The Hatco Flav-R 2-Go® Locker System - Countertop, designed specifically for your pick-up and third-party delivery needs, is capable of holding multiple orders of hot or ambient food with quick and secure access. By reducing congestion and allowing employees to focus on other functions, customers or delivery people can arrive, access their specific locker, and leave without waiting in line or disturbing the flow of other business.

### **Standard features**

- A great solution to handling pick-up, third-party delivery and to-go orders in a non-contact manner
- Floor mount and built-in models also available, see alternate spec sheets
- Individual lockers can have the heat turned off for ambient storage
- Each locker has a timer that will hold prepared and packaged food for up to 45 minutes
- Lockers come preset to 150°F (66°C) with a high temperature range up to 200°F (93°C) (All lockers will be one temperature)
- Large 10" (254 mm) touchscreen for easy viewing (front and/or back)
- On pass-through units, customer side stays locked. When the access code is used, the door unlocks and LED lights flash in the appropriate locker
- Internal lights can be programmed to six different colors: blue (standard), red, green, yellow, magenta or white (all lockers will be one color)
- Manual (standard) or POS integration capabilities available (outside vendor required)
- Available with pass-through or one-sided access. Available in two locker depth sizes, *Designer* colors and the ability to have a custom logo on the customer side glass doors

| Project  |  |  |  |
|----------|--|--|--|
| Item #   |  |  |  |
| Quantity |  |  |  |



**Options** (available at time of purchase only)

Designer Colors -

Non-standard colors are non-returnable – Warm Red standard –

□ Black □ Gray Granite □ White Granite □ Navy Blue □ Hunter Green □ Antique Copper

Right Side Control Panel – left side control panel standard – ☐F2G-3 ☐F2G-32

- □ Back panels Creates a non-pass-through unit (The cord and power switch will move to the side of the unit, operators left, if right side is not selected at time of order) (subtract .95" (24 mm) to the depth and add 1.21" (30 mm) to width) –
- ☐ Cord Location, operator side, bottom right corner in lieu of standard, Operator side, bottom left corner –

For operation, location and safety information, please refer to the Installation & Operating Manual.










# Flav-R 2-Go<sup>®</sup> Locker System - Countertop Models: F2G-3-A, -22-A, -32-A F2G-3-C, -22-C, -32-C

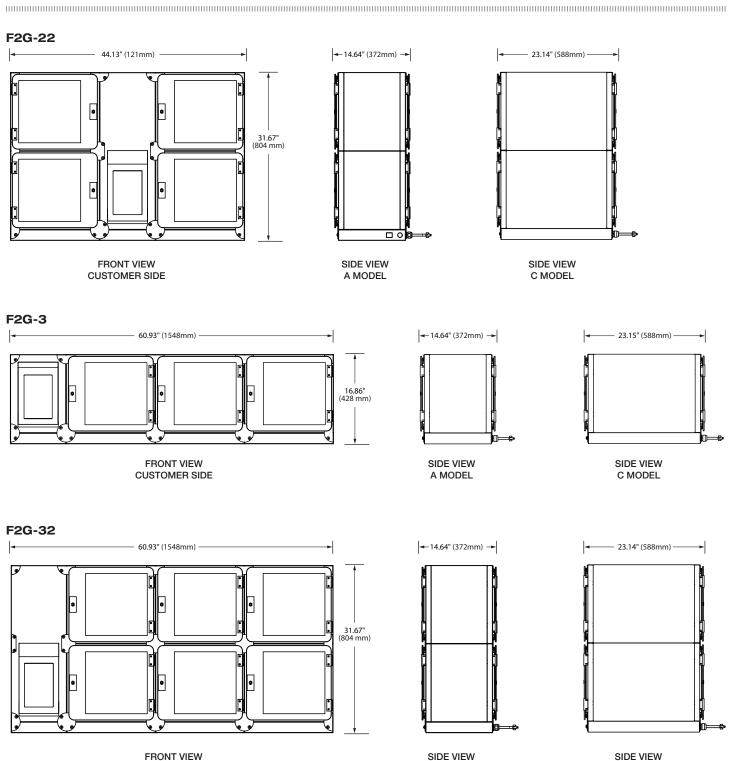

CUSTOMER SIDE

A MODEL

C MODEL



## Flav-R 2-Go<sup>®</sup> Locker System - Countertop Models: F2G-3-A, -22-A, -32-A F2G-3-C, -22-C, -32-C

### **SPECIFICATIONS**

Flav-R 2-Go® Locker Systems - Countertop


| Model    | Model Dimensions<br>(W x D x H)                   | Number of Lockers | Internal Locker<br>Dimensions (W x D x H) | Volts | Watts | Amps | Plug       |
|----------|---|-------------------|---|-------|-------|------|------------|
| F2G-22-A | 44.13" x 14.64" x 31.67"<br>(1121 x 372 x 804 mm) | 4 lockers         | 12" x 12" x 12"<br>(305 x 305 x 305 mm)   | 120   | 423   | 3.8  | NEMA 5-15P |
| F2G-22-C | 44.13" x 23.14" x 31.67"<br>(1121 x 588 x 804 mm) | 4 lockers         | 12" x 20.5" x 12"<br>(305 x 521 x 305 mm) | 120   | 551   | 4.8  | NEMA 5-15P |
| F2G-3-A  | 60.93" x 14.64" x 16.86"<br>(1548 x 372 x 428 mm) | 3 lockers         | 12" x 12" x 12"<br>(305 x 305 x 305 mm)   | 120   | 321   | 2.9  | NEMA 5-15P |
| F2G-3-C  | 60.93" x 23.14" x 16.86"<br>(1548 x 588 x 428 mm) | 3 lockers         | 12" x 20.5" x 12"<br>(305 x 521 x 305 mm) | 120   | 417   | 3.7  | NEMA 5-15P |
| F2G-32-A | 60.93" x 14.64" x 31.67"<br>(1548 x 372 x 804 mm) | 6 lockers         | 12" x 12" x 12"<br>(305 x 305 x 305 mm)   | 120   | 627   | 5.5  | NEMA 5-15P |
| F2G-32-C | 60.93" x 23.14" x 31.67"<br>(1548 x 588 x 804 mm) | 6 lockers         | 12" x 20.5" x 12"<br>(305 x 521 x 305 mm) | 120   | 819   | 7.1  | NEMA 5-15P |

### **CORD LOCATION**

Operator side, bottom left corner.

### **PLUG CONFIGURATIONS**

**NEMA 5-15P** 



**PRODUCT SPECS** Flav-R 2-Go® Locker System

The Locker System shall be a Flav-R 2-Go® Model ... , rated at ... volts, and ... watts, by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The lockers shall consist of magnetically locked hinged doors, heated base, a 10" (254 mm) touchscreen controller on one or both sides of the unit, a Power on/off

switch, LED lighting and a 6' (1829 mm) cord with plug attached.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 (414) 671-6350 www.hatcocorp.com support@hatcocorp.com