



Glo-Rite® Curved Display Lights

Models: HL5-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

A stylish choice for illuminating your serving area. The HL5 LED Display Light offers the highest light output that is ideal for illuminating food products with either a warm white light (3050K) or a cool or neutral white light (4100K).

The sleek, curved design is patented and the LED lighting delivers significant savings with lower energy consumption and greater reliability.

Hatco provides you with a wide variety of colors and lengths for any serving area.


Standard features

- Features a patented curved housing design that has energy efficient dual LED lights across the display lamp that provide longer performance and energy savings (compared to standard incandescent bulbs)
- Lengths available from 18"-72" (457-1829 mm) in 6" (152 mm) increments
- Field replaceable dual LED lights
- Matches the Hatco line of Glo-Ray® Curved Infrared Strip Heaters for a fully integrated look
- Angle brackets and end panels match housing color or finish and 6" (152 mm) power leads are standard
- Optional non-adjustable tubular stands and top or bottom mounting stands available

Project _____

Item # _____

Quantity _____

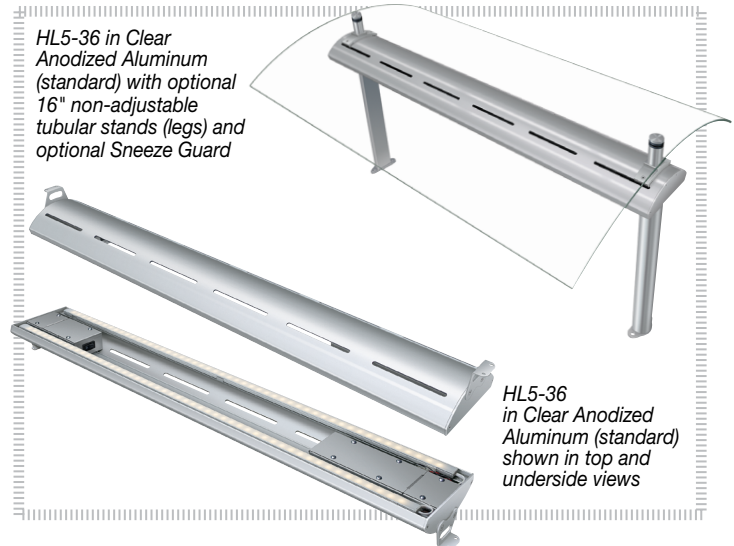

Options (available at time of purchase only)

LED Light

- ☐ Warm White (3050K) ☐ Cool or Neutral White (4100K)

Housing Color or Finish (Clear Anodized Aluminum is standard) – End panels and mounting brackets match unit color

Designer Color†

- ☐ Warm Red ☐ Black ☐ Gray Granite ☐ White Granite
☐ Navy Blue ☐ Hunter Green ☐ Antique Copper

Gloss Finish†

- ☐ Radiant Red ☐ Glossy Gray ☐ Bold Black ☐ Gleaming Gold
☐ Brilliant Blue

Curved Tempered Glass Sneeze Guard with penciled and polished edges
24"(610 mm) D x 4 1/8"(105 mm) H

- ☐ Black Anodized Hardware ☐ Clear Anodized Hardware

Non-Adjustable Tubular Stands (Clear Anodized Aluminum is standard and require Conduit or Wire Leads)

- ☐ 10" (254 mm) ☐ 12" (305 mm) ☐ 14" (356 mm) ☐ 16" (406 mm)

Non-Adjustable Top Mounting Stands (Clear Anodized Aluminum is standard and require Conduit or Wire Leads)

- ☐ 10" (254 mm) ☐ 12" (305 mm) ☐ 14" (356 mm) ☐ 16" (406 mm)

Non-Adjustable Bottom Mounting Stands (Clear Anodized Aluminum is standard and require Conduit or Wire Leads)

- ☐ 10" (254 mm) ☐ 12" (305 mm) ☐ 14" (356 mm) ☐ 16" (406 mm)

Designer Color†

- ☐ Warm Red ☐ Black ☐ Gray Granite ☐ White Granite
☐ Navy Blue ☐ Hunter Green ☐ Antique Copper

Gloss Finish†

- ☐ Radiant Red ☐ Glossy Gray ☐ Bold Black ☐ Gleaming Gold
☐ Brilliant Blue

Power Lead Length (6" [152 mm] Lead Length is standard) –

- ☐ 5' (1524 mm) – includes a 3' (914 mm) conduit
☐ 6' (1829 mm) – includes a 3' (914 mm) conduit
☐ 7' (2134 mm) – includes a 3' (914 mm) conduit
☐ 8' (2438 mm) – includes a 3' (914 mm) conduit
☐ 9' (2743 mm) – includes a 3' (914 mm) conduit
☐ 10' (3048 mm) – includes a 3' (914 mm) conduit

- ☐ 6' (1829 mm) Cord with Plug

†Non-standard colors are non-returnable



IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See www.hatcocorp.com/antimicrobial-paint for more information.

For operation, location and safety information, please refer to the Installation and Operating Manual.



HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



www.hatcocorp.com

support@hatcocorp.com

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)


[Chat](#)



Glo-Rite® Curved Display Lights

Models: HL5-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

HL5 Series

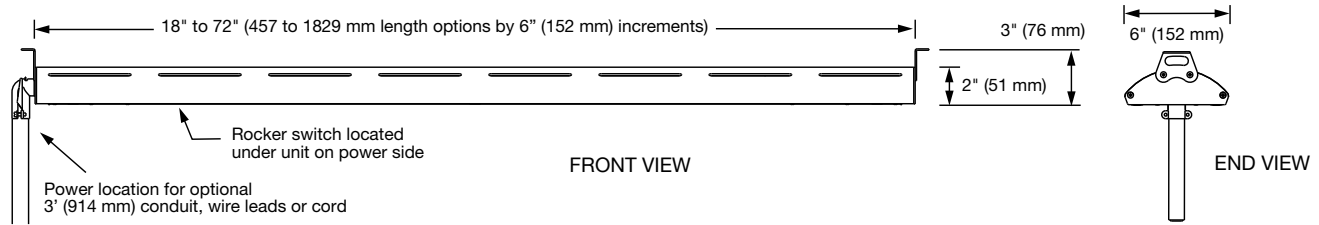

SPECIFICATIONS

Glo-Rite® Curved Display Lights

The shaded areas contain electrical information for International models

Model	Dimensions (Including Additional Height of Standard Angle Brackets) (W x D x H)	Height without Angle Brackets	Voltage (Single Phase)	Watts	Plug	Shipping Weight*
HL5-18	18" x 6" x 3" (457 x 152 x 76 mm)	2" (51 mm)	120	4	NEMA 5-15P	9 lbs. (4 kg)
			220-240		Schuko 7/7, BS-1363	
HL5-24	24" x 6" x 3" (610 x 152 x 76 mm)		120	6	NEMA 5-15P	12 lbs. (6 kg)
			220-240		Schuko 7/7, BS-1363	
HL5-30	30" x 6" x 3" (762 x 152 x 76 mm)		120	8	NEMA 5-15P	12 lbs. (6 kg)
			220-240		Schuko 7/7, BS-1363	
HL5-36	36" x 6" x 3" (914 x 152 x 76 mm)		120	9	NEMA 5-15P	12 lbs. (6 kg)
			220-240		Schuko 7/7, BS-1363	
HL5-42	42" x 6" x 3" (1067 x 152 x 76 mm)		120	11	NEMA 5-15P	14 lbs. (6 kg)
			220-240		Schuko 7/7, BS-1363	
HL5-48	48" x 6" x 3" (1219 x 152 x 76 mm)		120	12	NEMA 5-15P	16 lbs. (7 kg)
			220-240		Schuko 7/7, BS-1363	
HL5-54	54" x 6" x 3" (1372 x 152 x 76 mm)		120	14	NEMA 5-15P	17 lbs. (8 kg)
			220-240		Schuko 7/7, BS-1363	
HL5-60	60" x 6" x 3" (1524 x 152 x 76 mm)		120	16	NEMA 5-15P	18 lbs. (8 kg)
			220-240		Schuko 7/7, BS-1363	
HL5-66	66" x 6" x 3" (1676 x 152 x 76 mm)		120	17	NEMA 5-15P	19 lbs. (9 kg)
			220-240		Schuko 7/7, BS-1363	
HL5-72	72" x 6" x 3" (1829 x 152 x 76 mm)		120	19	NEMA 5-15P	20 lbs. (9 kg)
			220-240		Schuko 7/7, BS-1363	

* Shipping weight includes packaging.

ROCKER SWITCH

Location: Under unit on power side.

LEADS

6" (152 mm) leads on power side.

PRODUCT SPECS

Glo-Rite® Curved Display Lights

The Curved Display Lights shall be a Glo-Rite® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The HL5 Display Light shall be rated at ... watts, ... volts and be ... inches (millimeters) in overall width. It shall consist of an extruded aluminum housing with color or finish

matching brackets, end panels, and LED display lights.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



www.hatcocorp.com

support@hatcocorp.com

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)

[Chat](#)