



HEATER PROOFERS & CABINETS



Non-Insulated Heater Proofers

Economy Standard

1/2 Height Under the Counter

Universal Runner

Insulated Heater Proofer

Enclosed Mobile Transport Cabinets



NHPL-1836-ECOC

Heavy Duty
Polyurethane Swivel
Plate Caster
73819



Air baffle and circulating air blower provide even heat distribution.



Heater Proofers - Non-Insulated Economy

100% Pre-Tested Electrical Assembly

- Heavy Duty, aluminum construction designed for durability.
- Easy to Clean.
- Forced air design provides even heat distribution.
- 5" polyurethane plate casters for easy maneuverability and stability. Front casters are provided with brakes.
- Easy dual proof/heat control:
- "Proof/humidity" mode: Up to 95% humidity at 110°F (43°C)
- "Heat" mode: Maximum Temperatures up to 180°F (82°C)
- Clear door, extruded, anodized aluminum frame will not dull. A tight fit gasket is installed on the inside door frame.
- Door opens 270 degrees. Door lifts off for easy cleaning and accessibility.
- Control drawer is removable for quick and easy cleaning and maintenance.
- Drip trough catches condensation. Internal water pan collects condensation or is used in proofer mode.
- All controls are accessible without opening cabinet door. Easy to read real time LED thermometer display.
- Pan Capacity: 35 - 18" x 26" pans

Electrical specifications:

- 120 Volt-60 Hz, NEMA 5-15P
- 1440 Watts: 14.0 AMPS - Plug into any standard 110 outlet.

Model Number	Order#	Overall Dimensions						Approx. Ship Wt	
		Width		Length		Height			
		(in)	(mm)	(in)	(mm)	(in)	(mm)	(lb)	(kg)
NHPL-1836-ECOC	684668	21	533	30¾	781	66½	1,689	136	106

Caster Information

Swivel Plate Caster with 5" Polyurethane Wheel 738A (128784)
Swivel Plate Caster with 5" Polyurethane Wheel & Brake 738ABK (204185)
5" Polyurethane Wheel 7112 (122180)
Freight Class: 100



Items highlighted in red
are Express Ship!
See details on page 148.

Heater Proofers - Non-Insulated Standard Full & 1/2 Height 100% Pre-Tested Electrical Assembly

- Heavy Duty, aluminum construction designed for durability.
- Easy to Clean.
- Forced air design provide even heat distribution.
- 5" polyurethane plate casters for easy maneuverability and stability. Front casters are provided with brakes.
- Easy dual proof/heat control:
- "Proof/humidity" mode: Up to 95% humidity at 110°F (43°C)
- "Heat" mode: Maximum Temperatures up to 180°F (82°C)
- Corner bumpers provide protection to unit, associates & fixtures.
- Clear door, extruded, anodized aluminum frame will not dull. A tight fit gasket is installed on the inside door frame.
- Door opens 270 degrees. Door lifts off for easy cleaning and accessibility.
- Control drawer is removable for quick and easy cleaning and maintenance.
- Drip trough catches condensation. Internal water pan collects condensation or is used in proofer mode.
- All controls are accessible without opening cabinet door. Easy to read real time LED thermometer display.
- Pan Capacity: 35 - 18" x 26" pans NHPL-1836C
10 - 18" x 26" pans NHPL-1810HHC

Electrical specifications:

- 120 Volt-60 Hz, NEMA 5-15P
- 1440 Watts: 14.0 AMPS - Plug into any standard 110 outlet.

Model Number	Order#	Overall Dimensions						Approx. Ship Wt	
		Width		Length		Height			
		(in)	(mm)	(in)	(mm)	(in)	(mm)	(lb)	(kg)
NHPL-1836C	684684	21	533	30¾	781	66½	1,689	136	106
NHPL-1810HHC	684625	21	533	30¾	781	30 ^{2/3}	779	91	41

Caster Information

Swivel Plate Caster with 5" Polyurethane Wheel 738A (128784)


Swivel Plate Caster with 5" Polyurethane Wheel & Brake 738ABK (204185)

5" Polyurethane Wheel 7112 (122180)

Freight Class: 100



Items highlighted in red
are Express Ship!
See details on page 148

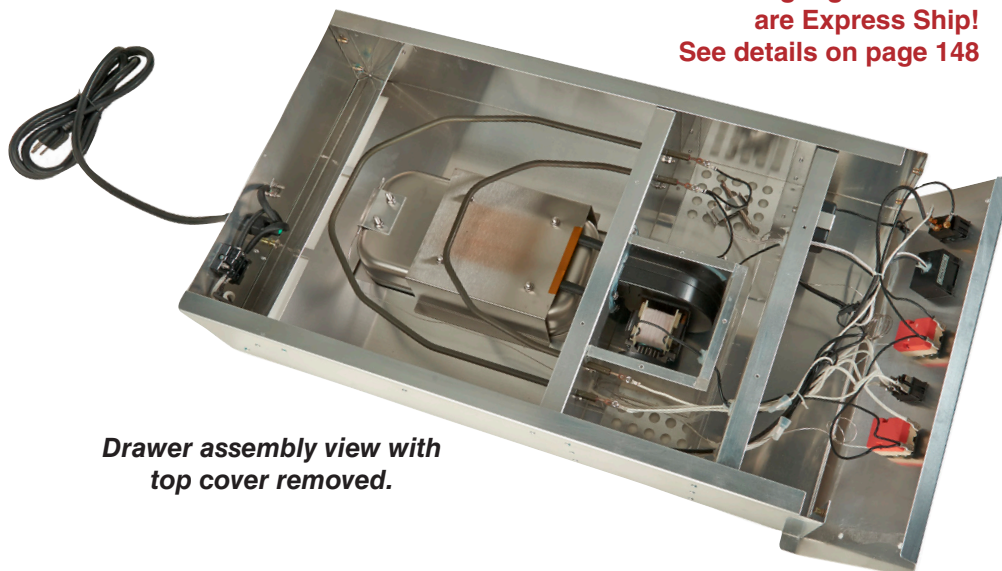

**Drawer assembly view with
top cover removed.**



NHPL-1836C



NHPL-1810HHC
Fits under counters and
tables.

For replacement parts
please see page 143.



NHPL-1825-UNC

Heater Proofers - Non-Insulated Universal Runner 100% Pre-Tested Electrical Assembly

- Non-insulated - Heavy duty aluminum construction.
- Forced air design provides even heat distribution.
- Removable chrome pan slides for variable spacing and for easy cleaning. Wire slided can be adjusted on 2" increments. Ships with 25 pan slide sets.
- 5" polyurethane plate casters for easy maneuverability and stability. Front casters are provided with brakes.
- Easy dual proof/heat control:
- "Proof/humidity" mode: Up to 95% RH at 110°F (43°C)
- "Heat" mode: Maximum Temperatures up to 180°F (82°C)
- Full length clear door opens 90 degrees.
- Field reversible door for right or left hanging is standard. Magnetic door latch for keeping door closed during transport. Easy pull handle for opening.
- Wire slided can be adjusted on 2" increments.
- Slides accommodate standard steam pans.
- Control drawer is removable for quick and easy cleaning and maintenance.
- Drip Trough catches condensation. Internal water pan collects condensation or is used in proofer mode.
- All controls are accessible without opening cabinet door. Easy to read real time LED thermometer display.
- Pan Capacity: 28 - 18" x 26" pans
- Corner bumpers provide protection to unit, associates and fixtures.

Electrical specifications:

- 120 Volt-60 Hz, NEMA 5-15P
- 1440 Watts: 14.0 AMPS - Plug into any standard 110 outlet.



Adjustable Universal Runners
Holds a variety of pan configurations.

Option: Additional runner slide (1)
NHPL-1825-UN-Runner
(657150)

Magnetic Door Latch



Field Reversible Door Mount

Model Number	Order#	Overall Dimensions						Approx. Ship Wt	
		Width		Length		Height			
		(in)	(mm)	(in)	(mm)	(in)	(mm)	(lb)	(kg)
NHPL-1825-UNC	684641	24	610	32	813	70	1,778	235	106

Caster Information

Swivel Plate Caster with 5" Polyurethane Wheel 738A (128784)

Swivel Plate Caster with 5" Polyurethane Wheel & Brake 738ABK (204185)

5" Polyurethane Wheel 7112 (122180)

Freight Class: 100



Heater Proofers - Insulated 35% Energy Savings! 100% Pre-Tested Electrical Assembly

- Heavy Duty, aluminum construction designed for durability.
- Easy to Clean.
- Forced air design provides even heat distribution.
- 5" polyurethane plate casters for easy maneuverability and stability. Front casters are provided with brakes.
- Easy dual proof/heat control:
- "Proof/humidity" mode: Up to 95% RH at 110°F (43°C)
- "Heat" mode: Maximum Temperatures up to 180°F (82°C)
- Corner bumpers provide protection to unit, associates & fixtures.
- Clear door, extruded, anodized aluminum frame will not dull. A tight fit gasket is installed on the inside door frame.
- Door opens 270 degrees. Door lifts off for easy cleaning and accessibility.
- Control drawer is removable for quick and easy cleaning and maintenance.
- Drip Trough catches condensation. Internal water pan collects condensation or is used in proofer mode.
- All controls are accessible without opening cabinet door. Easy to read real time LED thermometer display.
- Pan Capacity: 35 - 18" x 26" pans

Electrical specifications:

- 120 Volt-60 Hz, NEMA 5-15P
- 1440 Watts: 14.0 AMPS - Plug into any standard 110 outlet.



INHPL-1836

Model Number	Order#	Overall Dimensions						Approx. Ship Wt	
		Width		Length		Height			
		(in)	(mm)	(in)	(mm)	(in)	(mm)	(lb)	(kg)
INHPL-1836C	684609	21 ^{1/2}	546	32	813	66 ^{3/4}	1695	154	106

Caster Information

Swivel Plate Caster with 5" Polyurethane Wheel 738A (128784)

Swivel Plate Caster with 5" Polyurethane Wheel & Brake 738ABK (204185)

5" Polyurethane Wheel 7112 (122180)

Freight Class: 100



Items highlighted in red are Express Ship!
See page 148 for details.



For replacement parts please see page 143.