Halsey Taylor HydroBoost In-Wall Bottle Filling Station Non-Filtered Non-Refrigerated Stainless

Model HTHBLR-NF

PRODUCT SPECIFICATIONS

Halsey Taylor HydroBoost® In-Wall Bottle Filling Station Non-Filtered Non-Refrigerated Stainless, Features shall include Antimicrobial, Green Counter™, Laminar Flow, Real Drain, Sanitary Sensor Activated. Electronic Bottle Filler Sensor activation. Product shall be Wall Mount (Inwall Frame/Plate), for Indoor applications, serving 1 station(s). Unit shall be certified to UL 399 and CAN/CSA C22.2 No. 120. Unit shall be lead-free design which is certified to NSF/ANSI 61 & 372 (lead free) and meets Federal and State low-lead requirements.

Special Features:	Antimicrobial, Green Counter™, Laminar Flow, Real Drain, Sanitary Sensor Activated	
Finish:	Stainless Steel	
Power:	115V/60Hz	
Bubbler Style:	No Bubbler	
Activation by:	Electronic Bottle Filler Sensor	
Mounting Type:	Wall Mount (Inwall Frame/Plate)	
Chilling Capacity:	Non-refrigerated	
Full Load Amps	1	
Rated Watts:	15	
Dimensions (L x W x H):	19-3/4" x 3-1/2" x 40-13/16"	
Approx. Shipping Weight:	33 lbs.	
Installation Location:	Indoor	
No. of Stations Served:	1	

- Touchless, sensor-activation, designed for easy use.
- Green Counter: Informs user of number of 20 oz. plastic water bottles saved from waste.
- Laminar flow provides clean fill with minimal splash.
- Silver Ion Antimicrobial protection on key plastic components to inhibit the growth of mold and mildew.
- Real Drain System eliminates standing water.



Included with Product:

Bottle Filler (7457000083). Mounting Frame (MFWS100)

▼ Ships in multiple boxes

A Century of Tradition and Quality. For more than 100 years, Elkay has been making innovative

products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.



PRODUCT COMPLIANCE

ADA & ICC A117.1 Buy American Act CAN/CSA C22.2 No. 120 GreenSpec® NSF/ANSI 61 & 372 (lead free)

UL 399









Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards. Installation may require additional components and/or construction features to be fully compliant. Consult the local Authority Having Jurisdiction if necessary.

Installation Instructions (PDF) - 98558C Installation Instructions (PDF) - 98560C

Electrical components and water system are warranted for 12 months from date of installation. Warranty pertains to drinking water applications only. Non-drinking water applications are not covered under warranty.

Warranty (PDF)


PART:	_QTY:
PROJECT:	
CONTACT:	
DATE:	
NOTES:	
APPROVAL:	

In keeping with our policy of continuing product improvement, Halsey Taylor reserves the right to change product specifications without notice. Please visit Halseytaylor.com for the most current version of Halsey Taylor product specification sheets. This specification describes a Halsey Taylor product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Halsey Taylor HydroBoost In-Wall Bottle Filling Station Non-Filtered Non-Refrigerated Stainless

Model HTHBLR-NF






IMPORTANT! INSTALLER PLEASE NOTE:

The grounding of electrical equipment such as telephone, computers, etc., to water lines is a common procedure. This grounding may be in the building or may occur away from the building. This grounding can čausé electrical feedback into a water cooler, creating an electrolysis which causes a metallic taste or causes an increase in the metal content of the water. This condition is avoidable by using the proper materials as indicated below. To minimize electrically induced corrosion, all water coolers should be connected to the water supply using an electrically isolating coupling. This cooler is furnished with non-metallic filter which meets this requirement. The drain fittings which are provided by the installer should also be plastic to electrically isolate the cooler from the building plumbing system.

These products are designed to operate on 20 psi to 105 psi supply line pressure.

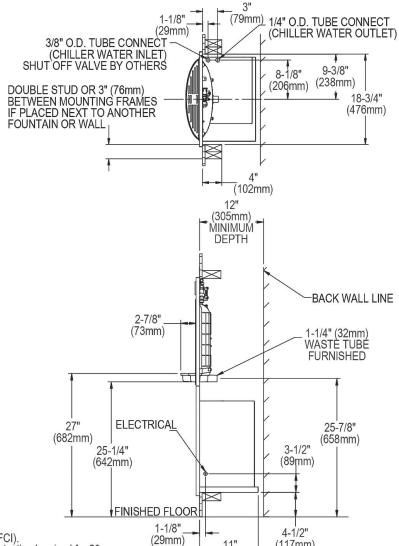


11"

(279mm)

(117mm)

BOTTLE FILLER SPECIFICATIONS




Note: New Installations Must Use Ground Fault Circuit Interrupter (GFCI) It is highly recommended that the circuit be dedicated and the load protection be sized for 20 amps.

In keeping with our policy of continuing product improvement, Halsey Taylor reserves the right to change product specifications without notice. Please visit Halseytaylor.com for the most current version of Halsey Taylor product specification sheets. This specification describes a Halsey Taylor product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



MOUNTING FRAME MFWS100 WITHOUT CHILLER SHELF

IMPORTANT! INSTALLER PLEASE NOTE:

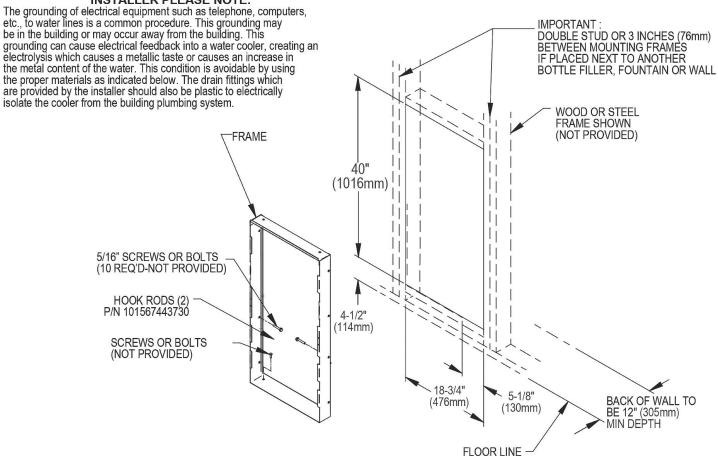

In keeping with our policy of continuing product improvement, Halsey Taylor reserves the right to change product specifications without notice. Please visit Halseytaylor.com for the most current version of Halsey Taylor product specification sheets. This specification describes a Halsey Taylor product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.