

General Information

Project Name: _____

Consultant: _____

Item #: _____

Model #: _____

Quantity: _____



Specifications

SFT Shallow Floor Troughs are 14GA type 300 series stainless steel, with large integral coves and pitched .635cm per foot to a 6½" OD waste outlet with 10.16cm OD tailpiece. Perforated waste basket provided at each drain. Anchor straps welded to the sides secure trough to the floor.

Recessed flange and 2.54cm deep ledge for IMC grating are integral with the unit. Trough is 5.08cm deep overall.

Joints are TIG welded and leak-proof. Exposed surfaces finished brush satin.

Product Guide

Use for food prep facilities where floor thickness limits trough depth to 5.08cm.

Integral coves, deep pitch and a large waste cup, assure quick and complete drainage.

Recessed flange supports floor tile and provides a grout pocket.

Setting frame for waterproof membrane and/or integral seepage flange with "weep" holes can be added for wet floor areas.




Options*

- ☐ **DOD** - 7.62cm, 8.89cm, 12.7cm, 15.24cm, 20.32cm OD Tube (circle one)
- ☐ **WTO** - Waste Tube over 7.62cm Long
- ☐ **AW** - Additional Wastes
- ☐ **WCP** - Waste Cup Strainers
- ☐ **BH** - Beehive Strainers (Each)
- ☐ **OCW** - Off Center Waste (Each)
- ☐ **ST12** - Scrap Tray Up to 45.72cm Wide
- ☐ **PWT** - Perforated Waste Pipe
- ☐ **SF-2** - Special Size Setting Flange 5.08cm Deep
- ☐ **SF-4** - Special Size Setting Flange 5.08cm to 10.16cm Deep
- ☐ **OWT** - Oversize Waste Tube
- ☐ **FSG** - Seepage Flange w/ Weep Holes
- ☐ **ST20** - Scrap Tray 50.8cm Long
- ☐ **DSE** - Drain on the End
- ☐ **ROD** - Rim on Drain
- ☐ **BSPC** - Basket Strainer w/ Handle & Chain
- ☐ **BXD** - Box Type Drain
- ☐ **BSX** - Beehive Strainer for Box Drain

*See Price List for Complete Options

SFT-10 1121

DRAWINGS

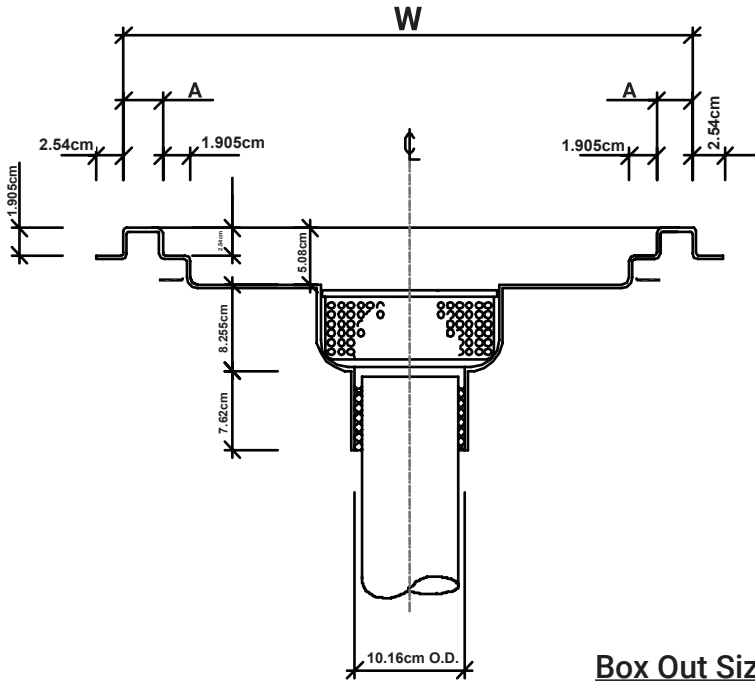


A = 2.54cm for Troughs up to 38.1cm Wide
 A = 3.81cm for Troughs over 38.1cm Wide

Box Out Size

Trough Area

- Width (PIT) = Width ("W") + 10.16cm Minimum
- Length (PIT) = Length ("L") + 10.16cm Minimum
- Depth (PIT) = Depth of Trough + 1.27cm + Finish Floor
- Size of Rough-In Hole For Drains 19.05cm Ø Minimum

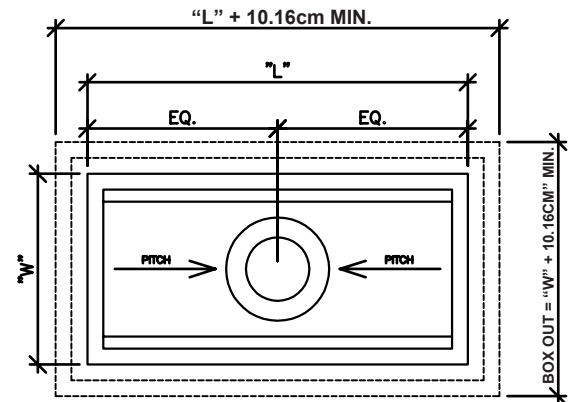

SHALLOW FLOOR TROUGHS

Model	Size (W x L)	Model	Size (W x L)	Model	Size (W x L)	Model	Size (W x L)
□ SFT-1224	30.48cm x 60.96cm	□ SFT-1824	45.72cm x 60.96cm	□ SFT-2424	60.96cm x 60.96cm	□ SFT-3024	76.2cm x 60.96cm
□ SFT-1230	30.48cm x 76.2cm	□ SFT-1830	45.72cm x 76.2cm	□ SFT-2430	60.96cm x 76.2cm	□ SFT-3030	76.2cm x 76.2cm
□ SFT-1236	30.48cm x 91.44cm	□ SFT-1836	45.72cm x 91.44cm	□ SFT-2436	60.96cm x 91.44cm	□ SFT-3036	76.2cm x 91.44cm
□ SFT-1248	30.48cm x 121.92cm	□ SFT-1848	45.72cm x 121.92cm	□ SFT-2448	60.96cm x 121.92cm	□ SFT-3048	76.2cm x 121.92cm
□ SFT-1260	30.48cm x 152.4cm	□ SFT-1860	45.72cm x 152.4cm	□ SFT-2460	60.96cm x 152.4cm	□ SFT-3060	76.2cm x 152.4cm
□ SFT-1272	30.48cm x 182.88cm	□ SFT-1872	45.72cm x 182.88cm	□ SFT-2472	60.96cm x 182.88cm	□ SFT-3072	76.2cm x 182.88cm
□ SFT-1284	30.48cm x 213.36cm	□ SFT-1884	45.72cm x 213.36cm	□ SFT-2484	60.96cm x 213.36cm	□ SFT-3084	76.2cm x 213.36cm
□ SFT-1296	30.48cm x 243.84cm	□ SFT-1896	45.72cm x 243.84cm	□ SFT-2496	60.96cm x 243.84cm	□ SFT-3096	76.2cm x 243.84cm
□ SFT-12108	30.48cm x 274.32cm	□ SFT-18108	45.72cm x 274.32cm	□ SFT-24108	60.96cm x 274.32cm	□ SFT-30108	76.2cm x 274.32cm
□ SFT-12120	30.48cm x 304.8cm	□ SFT-18120	45.72cm x 304.8cm	□ SFT-24120	60.96cm x 304.8cm	□ SFT-30120	76.2cm x 304.8cm

Note - Standard troughs up to 243.84cm have one (1) waste at center. Over 243.84cm, troughs have two (2) wastes equidistant.

Specifications subject to change without notice.

SFT-10 1121