



Project _____

Model # _____ Quantity _____



Mobile Culinary Station

Models:

Model #	Number of Ranges	Number of Air Filter Systems	Number of Refrigerated Drawers	Number of Power Management Systems	Power Supply Voltage	Range Peak Power
MCS1800	2	1	2	1	208-240	1800 W
MCS3572	2	1	2	1	208-240	2600 W

Description:

Spring USA's Mobile Culinary Station is a mobile unit that provides high-speed heating, refrigerated drawers for easy replenishment of food items and quiet, efficient air filtering that removes grease laden vapor and odors all within a beautiful, stainless-steel cabinet with heavy duty casters. Each unit offers flush mounted induction ranges with LED power/temp display, (2) heavy duty refrigerator drawers, a downdraft air filter system with easy access to filters and an integrated power source that powers the entire unit.

Standard Warranty:

- One year, parts & labor (excluding filters)
- Refrigeration warranty by manufacturer

Agency Listings:

- ETL
- UL STD 197
- CSA C22.2 #109
- CSA C22.2 #120
- UL 471



Mobile Culinary Station

Construction & Performance Features:

Cabinet

- Heavy duty, easy to clean, stainless steel work top
- Black-body, wrap-around finish
- Front locking, 5" diameter casters with rubber tires

Induction Ranges (*Model #SM-181R or SM-261R*)

- Choice of 1800 watts, 120 volt or 2600 watts, 240 volt
- Easy to clean, 5 mm thick, tempered glass cooktop
- Black, tempered glass faceplate
- Power on/off with power on/pan present indicator light
- SmartScan technology
- Solid state controls with over/under voltage protection
- Cook/Temp mode touch pad with indicator lights
- Knob-set thermostat control with digital LED display
- Cook mode levels 1-20 and temp mode range from 100°F-400°F

Refrigerated Drawers

- Drawers accept standard food pans
- Hermetically sealed compressor, finned evaporator and condenser

Air Filter System (*Model #AF-350*)

- Cabinet mounted downdraft filtration system
- Stainless steel, counter-level, capture flue(s)
- Easy-service drawer slide for filter access
- Washable pre-filter, primary cell filter, and carbon absorption filter
- 96.7% capture of 1-3-micron particulate
- Quiet running 350-watt blower

Power Management System (*Model #PM2221, PM2231, or PM2251*)


- Cabinet mounted for single point power connection
- Stainless steel enclosure and hardware
- 6 ft. power cord with NEMA 14-50P plug
- Includes NEMA 14-50R receptacle
- All outlets are surge protected



Mobile Culinary Station

Available Accessories/Alternative Configurations:

- Designer cabinet body-wrap finishes (special order)
- Push handle
- Replacement filters
 - Galvanized baffle prefilter (Item #AF9879)
 - Rigid-cell primary filter (Item #AF98710)
 - Ring-panel final filter (Item #AF98711)
- Induction ready cookware (See Spring USA catalog)



Item #AF9879



Item #AF98710



Item #AF98711

Electric Requirements:

Each Mobile Culinary Station comes with its own Power Management System, powering the entire unit with a single receptacle, eliminating the need for multiple receptacles at various voltages. The Power Management System includes five receptacles and can combine 120-volt and 240-volt power into one central power source of 240-volt. This simplifies the electrical requirements of each unit.

Below are the requirements of the Power Management system per the Mobile Culinary Station model.


Model #	Voltage	Phase	Hertz	kW	Amps	Plug
MCS1800	208-240	1	60	4.43	22.4	NEMA 14-50P
MCS3572	208-240	1	60	6.03	23.4	NEMA 14-50P

For requirements of the individual components (induction ranges or air filter system) please see their corresponding specification sheets.


Mobile Culinary Station

Key Dimensions:


TOP VIEW

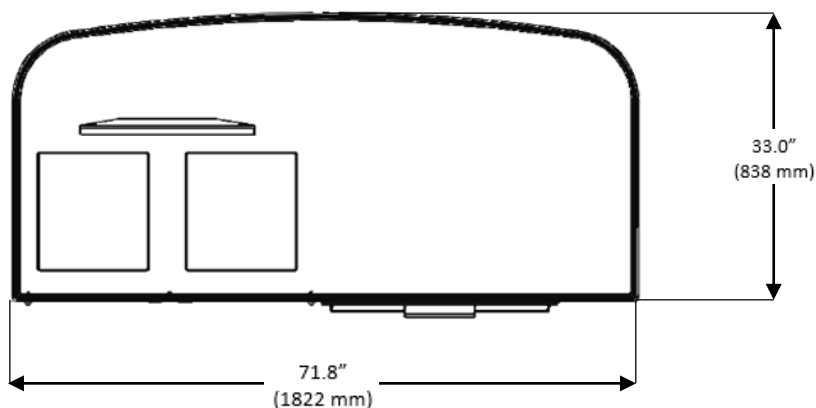

FRONT VIEW

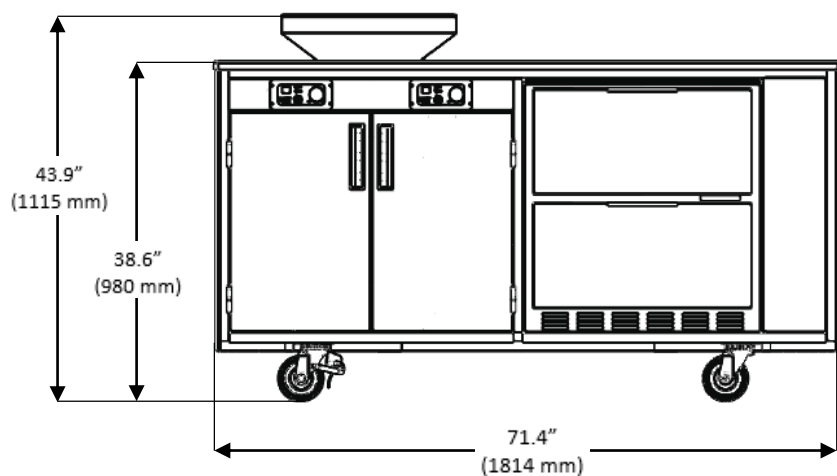

SIDE VIEW

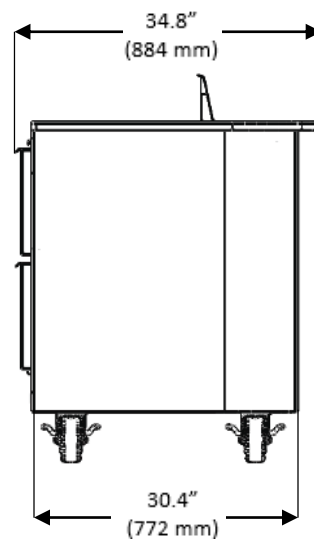

Optional push handle adds approximately 6" to the overall length.



Project _____

Model # _____ Quantity _____

Mobile Culinary Station

Shipping Dimensions:

Model #	Length	Width	Height	Weight
MCS1800	78" (1981 mm)	40" (1016 mm)	50" (1270 mm)	841 lb. (382 kg)
MCS3572				

Notes & Conditions:

1. Ensure that you have dedicated power wherever you are planning to use your Mobile Culinary Station. Refer to the manual for detailed instructions regarding operation.
2. Ensure the unit has proper ventilation at all times so it does not overheat.
3. The air filtration system is design exclusively for use with built-in induction ranges and cannot be used as a stand alone device or with other heating devices.
4. Induction ranges require use of ferrous metal, induction-ready cookware.
5. Spring USA Induction Servers and Induction Warmers/Ranges are designed to work together as a system. Optimal performance is achieved by using Spring USA components in conjunction with each other. As the first to offer such induction systems, Spring USA cannot warranty the performance of facsimile products offered by other companies.
6. Refer to individual specification sheets for the induction ranges, air filter system, or power management system for detailed information.