

{13.21}



Metro HotBlox® Xpress Quick-Pick Holding Cabinets

Countertop hot food holding that's quick-to-pick, quick-to-serve.

- **Compact, shallow depth design:** is perfect on or above the counter to create useable space in front or under the unit. Provides instant access to hot food for faster service. 3 Sizes to choose from, available in reach-in and pass-thru configurations.
- **Quick flip doors & adjustable shelves:** allow for easy access and effortless picking of food to process orders more efficiently.
- **Crispy or moist holding:** with the same cabinet using Metro's hybrid convection – radiant heating technology. Flexibility to switch from one style of food to another throughout the day.
- **Built-in ceiling vents:** with convection airflow keeps crispy food crispy, releasing unwanted humidity given off by the food.
- **Radiant floor element:** helps generate humidity by placing a pan of water on the floor to keep moist foods moist.
- **LED lighting:** improves visibility to help facilitate order picking or to display hot food prominently in display, self serve, or concession applications.
- **Touchscreen Control Option:** displays relative humidity levels inside the cabinet to give the operator valuable feedback and help maintain better food quality. Menu presets help assure repeatability across your operation. Programmable timers help manage holding times and first-in-first-out (FIFO), giving better control over food quality & consistency. Auto ON / OFF feature powers up and down everyday. USB port with built-in HACCP data logging to enhance food safety and save / load customized settings.
- **Simple Control Option:** Electro-mechanical thermostat and simple digital thermometer are a more cost effective option for basic holding needs.
- **Undercounter:** available by adding dolly and full door options.
- **Free standing:** available by adding dolly and stacking kit options.



Available Models



Touchscreen Controls



Simple Controls



Reach-in Models		HBCS4	HBCS6	HBCS8
Touchscreen Controls		HBCS4-T	HBCS6-T	HBCS8-T
Simple Controls		HBCS4-B	HBCS6-B	HBCS8-B

Pass-thru Models		HBCS4	HBCS6	HBCS8
Touchscreen Controls		HBCS4-TP	HBCS6-TP	HBCS8-TP
Simple Controls		HBCS4-BP	HBCS6-BP	HBCS8-BP


ELECTRICAL SPECIFICATIONS	120V, 60Hz, 875W / NEMA 5-15P
---------------------------	-------------------------------

- For 220-240V, 50/60Hz option, add "X" to 120V model number (ie- HBCS6-TX or HBCS6-TXP, 735-875W, NEMA 6-15P)
- For cabinets with accessories, add "A" to end of model number (ie- HBCS6-TA or HBCS6-TPA)

Metro Heated cabinets are for hot food holding applications only.

All Metro Catalog Sheets are available on our website: metro.com

Dimensions

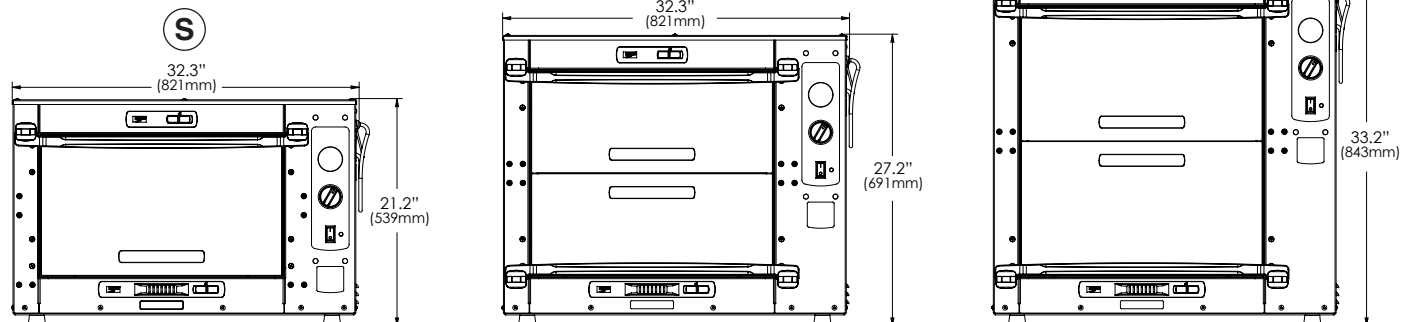

Flip Door: Reach-in models are 16.9" (429mm) deep, pass-thru are 17.8" (452mm) deep.

Full Door: Reach-in models are 17" (431mm) deep, pass-thru are 18.4" (468mm) deep.

Specifications

Cabinet Construction: .063" (1.6mm) thick aluminum body with high-density fiberglass insulation.

Flip Doors: .177" (4.5mm) thick polycarbonate with red polymer handles, and multi-position polymer detent hinges. Doors hold open at 120° and 170°, without secondary mechanical support. Cabinets ship standard with flip doors, S4 models open upwards, S6 and S8 models top door upwards and bottom downwards. Doors are field configurable to open up or down based on customer preference and application.

Full Doors: .063" (1.6mm) aluminum with welded corners, polycarbonate window, and flush mounted chrome plated high strength magnetic latch with lever action release. Field reversible, double hinged, 180° swing. Optional, can be ordered in lieu of flip doors.

Door Gaskets: High temperature, cabinet mounted santoprene gaskets. Removable without tools.

Shelves and Pan Slides: .100" (2.5mm) thick aluminum slides & nickel chrome plated wire shelves, adjustable on 1.5" (38mm) increments. Can be installed flat or slanted by approximately 9° or 18° (1 or 2 positions). S4 cabinets include 2 shelf levels, S6 include 3 levels, and S8 models include 4 levels. Useable shelf space is 19" (483mm) x 12" (305mm), when spaced evenly, provides 5.5" (140mm) of useable vertical space. Option to double amount of slides in lieu of shelves, 4 sets for S4 models, 6 sets for S6, and 8 sets for S8 models. Spaced on 3" (76mm) centers.

LED lights: all models supplied with (4) ceiling mounted lights. Each, 1.6" (41mm) diameter lens, 220 lumens. Neutral, white light (3500 K color temperature).

Feet / Casters: all models supplied with 1" (25mm) rubber feet. Dolly with 3" (76mm) rubber swivel casters, 2 with brakes is available as an add-on option.

Power Cord: 6' (183cm) long cord with NEMA 5-15P plug on 120V models and NEMA 6-15P on 220-240V models.

Heating System: Thermostatically controlled hybrid convection – radiant system. 675W heating element, circulating fan, ducted air circulating system with 200W radiant heating element under floor surface.

Performance: 90°F (32°C) to 190°F (88°C) temperature range.

Recommended Clearances for Enclosures: 1.5" (38mm) on cabinet sides and back. Always maintain at least 1" of space under cabinet to countertop surface.

Stacking Requirements: Maximum stacked height shall never exceed 75" (1905mm). All cabinets can be stacked in (2) unit configurations, or a maximum (1) S6 and (2) S4 cabinets per stacked unit. Stacked cabinets must maintain 2" (51mm) spacing using proper stacking kit with proper ventilation.

Pan Capacities

Cabinet Size	With Shelves					With Pan Slides			
	Sheet Pans	1/3 Pans	12"x20" Steam - GN 1/1 Pans			Sheet Pans	12"x20" Steam - GN 1/1 Pans		
	13"x18"	2.5" 65mm	2.5" 65mm	4" 100mm	6" 150mm	13"x18"	2.5" 65mm	4" 100mm	6" 150mm
S S4	2	6	2	2	1	4	4	2	1
M S6	3	9	3	3	2	6	6	4	2
L S8	4	12	4	4	3	8	8	5	3

{13.21}



Metro HotBlox® Xpress Quick-Pick Holding Cabinets


Options & Accessories



Stacking Kit
(customer must install)
HBCS-STACK



Riser Kit
(customer must install)
HBCS-RISER



Additional Shelf
(May require ordering additional set
of slides, HBCS-SLIDEPR)
HBCS-SHELF



Dolly base with 3" casters
(customer must install)
HBCS-3CASTER



Additional Slide Pair
HBCS-SLIDEPR

HBCS8-DOOR-R



Pass-thru unit shown
with optional doors
& pan slides.

HBCS8-F-DOOR

Pan slide option (in lieu of shelves)

HBCS4-SLIDES (4 slide levels, S4 models)

HBCS6-SLIDES (6 slide levels, S6 models)

A HBCS8-SLIDES (8 slide levels, S8 models)

Full door option (in lieu of flip doors)

HBCS4-F-DOOR (front door, S4 models)

HBCS6-F-DOOR (front door, S6 models)

B HBCS8-F-DOOR (front door, S8 models)

HBCS4-DOOR-R (rear door, S4 pass-thru models)

HBCS6-DOOR-R (rear door, S6 pass-thru models)

C HBCS8-DOOR-R (rear door, S8 pass-thru models)

Offset door latch (for full doors only)

HBC-OFFLATCH

Alternate full door hinging options

HBC-LHINGE (factory left hand hinging)

HBC-SAMESIDE (same-side pass-thru door hinging)