



Item# \_\_\_\_\_

Job \_\_\_\_\_



## Standard




5MB Wheel Brake



5M Resilient

## Stainless Steel, Cart Washable

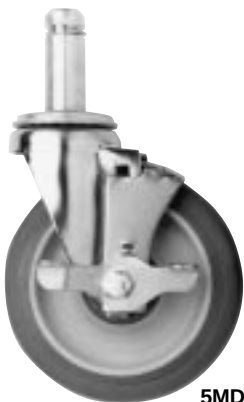

5MDBGSA



5MDGSA

## Polymer Casters



5PC



5PCB

## METRO™ STEM CASTERS

- **Metro Stem-Type Casters** are designed to fit Super Erecta Shelf® posts to form shelf carts and other mobile units.
- **Stainless Steel, Cart-Washable Casters** offer grease seals and zerk fittings. Can withstand high-pressure washings.
- **Polymer Casters:** Innovative polymer stem casters offer total corrosion resistance and enhanced durability. For all medium-duty applications.
- **Resilient Rubber Tread:** A molded, soft tread that provides good floor protection along with quiet operation. Non-marking.
- **Polyurethane Tread:** Long-wearing; resists abrasion. Non-marking, shock absorbing.
- **Wheel Brakes:** Foot-operated. Available on all caster models.
- **Caster Load Ratings:** From 125 lbs. to 300 lbs. (57 to 136kg).
- **Donut Bumpers:** Furnished standard on all Metro stem casters.
- **Additional Caster Types Available.**

**Note:** SPECIAL WHEELS — V-groove, Conductive, Steel and Phenolic — are available on request. For additional information, contact InterMetro Industries Corporation or your InterMetro representative.



InterMetro Industries Corporation  
North Washington Street  
Wilkes-Barre, PA 18705  
[www.metro.com](http://www.metro.com)

Job \_\_\_\_\_

# METRO™ STEM CASTERS



## DIMENSIONS: Standard Casters — Stem-Type

| Cat. No. | Type        | Wheel Dia. |      | Face  |      | Wheel Tread        | Load Rating |      | Approx. Pkd. Wt. |      |
|----------|-------------|------------|------|-------|------|--------------------|-------------|------|------------------|------|
|          |             | (in.)      | (mm) | (in.) | (mm) |                    | (lbs.)      | (kg) | (lbs.)           | (kg) |
| 4LD      | Stem/Swivel | 4          | 102  | 1/2   | 12   | Resilient          | 125         | 56   | 1 1/2            | .6   |
| 5LD      | Stem/Swivel | 5          | 127  | 1/2   | 12   | Resilient          | 125         | 56   | 2                | .9   |
| 5M       | Stem/Swivel | 5          | 127  | 1 1/4 | 32   | Resilient          | 200         | 90   | 2 1/2            | 1.1  |
| 5MB      | Stem/Brake  | 5          | 127  | 1 1/4 | 32   | Resilient          | 200         | 90   | 2 3/4            | 1.2  |
| 5MR      | Stem/Rigid  | 5          | 127  | 1 1/4 | 32   | Resilient          | 200         | 90   | 3 1/2            | 1.5  |
| 5MDA     | Stem/Swivel | 5          | 127  | 1 1/4 | 32   | High Modulus Donut | 250         | 111  | 2 1/2            | 1.1  |
| 5MDBA    | Stem/Brake  | 5          | 127  | 1 1/4 | 32   | High Modulus Donut | 250         | 111  | 2 5/8            | 1.17 |
| 5MDRA    | Stem/Rigid  | 5          | 127  | 1 1/4 | 32   | High Modulus Donut | 250         | 111  | 2 3/8            | 1.08 |
| 5MP      | Stem/Swivel | 5          | 127  | 1 1/4 | 32   | Polyurethane       | 300         | 135  | 2 1/8            | .94  |
| 5MPB     | Stem/Brake  | 5          | 127  | 1 1/4 | 32   | Polyurethane       | 300         | 135  | 2 1/4            | 1    |
| 5MPR     | Stem/Rigid  | 5          | 127  | 1 1/4 | 32   | Polyurethane       | 300         | 135  | 2                | .9   |

**NOTE 1:** Stem casters are shipped with donut bumper **at no additional charge**.

**NOTE 2:** Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width must be known.

**NOTE 3:** Load Height for all 5M, 5MD and 5MP casters —  $6\frac{7}{32}'' \pm \frac{1}{16}''$  ( $155 \pm 1.5\text{mm}$ ).

**NOTE 4:** Load Height for 4LD caster —  $4\frac{5}{16}'' \pm \frac{1}{16}''$  ( $118 \pm 1.5\text{mm}$ ).

**NOTE 5:** Load Height for 5LD caster —  $5\frac{5}{8}'' \pm \frac{1}{16}''$  ( $143 \pm 1.5\text{mm}$ ).

**NOTE 6:** Brakes are foot-operated.

## DIMENSIONS: Stainless Steel Cart-Washable Casters — Stem-Type

| Cat. No. | Type   | Wheel Dia. |      | Face  |      | Wheel Tread        | Load Rating |      | Approx. Pkd. Wt. |      |
|----------|--------|------------|------|-------|------|--------------------|-------------|------|------------------|------|
|          |        | (in.)      | (mm) | (in.) | (mm) |                    | (lbs.)      | (kg) | (lbs.)           | (kg) |
| 5MDGSA   | Swivel | 5          | 127  | 1 1/4 | 32   | High Modulus Donut | 150         | 68   | 2 1/2            | 1.1  |
| 5MDBGSA  | Brake  | 5          | 127  | 1 1/4 | 32   | High Modulus Donut | 150         | 68   | 2 5/8            | 1.17 |
| 5MDRGSA  | Rigid  | 5          | 127  | 1 1/4 | 32   | High Modulus Donut | 150         | 68   | 2 3/8            | 1.08 |
| 5MPGSA   | Swivel | 5          | 127  | 1 1/4 | 32   | Polyurethane       | 300         | 135  | 2 1/8            | .94  |
| 5MPBGSA  | Brake  | 5          | 127  | 1 1/4 | 32   | Polyurethane       | 300         | 135  | 2 1/4            | 1    |
| 5MPRGSA  | Rigid  | 5          | 127  | 1 1/4 | 32   | Polyurethane       | 300         | 135  | 2                | .9   |

**NOTE 1:** Stem casters are shipped with donut bumper **at no extra charge**.

**NOTE 2:** Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width must be known.

**NOTE 3:** Load Height for all 5MD and 5MP casters —  $6\frac{7}{32}'' \pm \frac{1}{16}''$  ( $155 \pm 1.5\text{mm}$ ).

**NOTE 4:** All casters are grease sealed with zerk fittings in swivel and axle.

**NOTE 5:** Brakes are foot-operated.

**NOTE 6:** "D" in model number designates donut wheel made of high-modulus rubber.

## DIMENSIONS: Polymer Casters — Stem-Type

| Cat. No. | Type   | Wheel Dia. |      | Face  |      | Wheel Tread  | Load Rating |      | Approx. Pkd. Wt. |      |
|----------|--------|------------|------|-------|------|--------------|-------------|------|------------------|------|
|          |        | (in.)      | (mm) | (in.) | (mm) |              | (lbs.)      | (kg) | (lbs.)           | (kg) |
| 5PC      | Swivel | 5          | 127  | 1 1/4 | 32   | Polyurethane | 300         | 135  | 2                | .9   |
| 5PCB     | Brake  | 5          | 127  | 1 1/4 | 32   | Polyurethane | 300         | 135  | 2                | .9   |
| 5PCR     | Rigid  | 5          | 127  | 1 1/4 | 32   | Polyurethane | 300         | 135  | 2                | .9   |

**NOTE 1:** Optional thread guards (blue) may be ordered by adding "-TG" to the desired model number (eg. 5PC-TG, 5PCB-TG, 5PCR-TG)

**NOTE 2:** Stem casters are shipped with donut bumpers **at no extra charge**.

**NOTE 3:** Rigid casters are held in place by a connecting channel. When ordering, shelf depth **must be** provided.

**Manufactured by:**  
**InterMetro Industries Corp.**  
North Washington Street  
Wilkes-Barre, PA 18705

Phone 717-825-2741  
FAX 717-825-2852  
For Product Information, call 1-800-433-2232  
For Customer Service, call 1-800-992-1776



**InterMetro Industries Corporation**  
North Washington Street  
Wilkes-Barre, PA 18705  
www.metro.com

L02-041  
Rev. 9/98 B.J  
Printed in U.S.A.  
Information and specifications are subject to change  
without notice. Please confirm at time of order.