

### Refrigerated Self-Service Multi-Purpose Island - 4' Case Depth



MODEL SHOWN: MI44R

- MI44R
- MI45R
- MI46R
- MI48R

Lengths include end panels	
50-1/8"L x 48-1/2"D x 39-1/8"H	
62-1/8"L x 48-1/2"D x 39-1/8"H	
74-1/8"L x 48-1/2"D x 39-1/8"H	
98-1/8"L x 48-1/2"D x 39-1/8"H	

#### STANDARD FEATURES

- Breeze w/EnergyWise s/c refrigeration
- 1" bumper, double strip (specify color)
- Blue Fin coated coil
- Casters
- Compressor air intake in one side & out other side. All louvered panels cannot be blocked
- Corrosion resistant stainless steel tub & fan shroud
- Integrated average product temperature adjustable from 38°F to 40°F
- NOTE: Maximum load height is 8-1/4" up from deck
- NOTE: Upper trim matches exterior color
- One year parts & labor; 5 year compressor warranty
- Removable deck pans provide complete access to evaporator coil & refrigeration connections
- Solid metal deck
- Straight insulated glass ends

Features	Standard	Options
<b>EXTERIOR COLOR</b>	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Painted (stock colors, specify RAL#) <input type="checkbox"/> Stainless steel (includes lower base)
<b>INTERIOR COLOR</b>	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel
<b>TRIM COLOR</b>	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel
<b>BASE</b>	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel (w/stainless ext. only)
<b>ELECTRICAL CONNECT</b>	<input type="checkbox"/> 6' Straight blade power cord (self-cont.)	<input type="checkbox"/> 6' Locking power cord (self-cont.)
<b>MISCELLANEOUS</b>		<input type="checkbox"/> Clean Sweep® coil cleaner (n/a w/remote) <input type="checkbox"/> Second year parts & labor warranty (excludes compressor)




# Oasis®

## Product Specifications

<b>Intended Environment:</b> Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.		
<b>Zone</b>	<b>Intended Product To Be Displayed</b>	<b>Warmest Avg Prod Temp ° F</b>
1	Packaged raw meat (38°) Packaged produce/deli (40°)	38-40

PLAN VIEW

SIDE VIEW

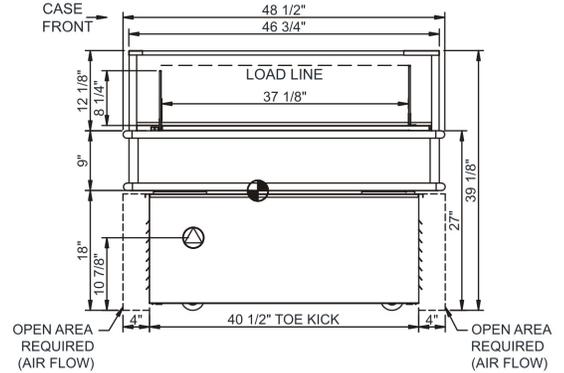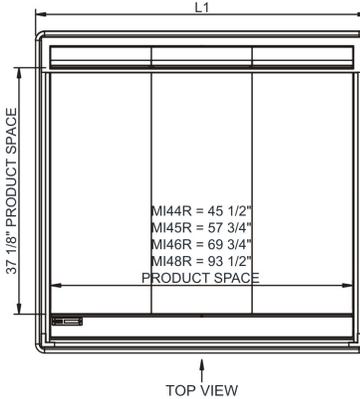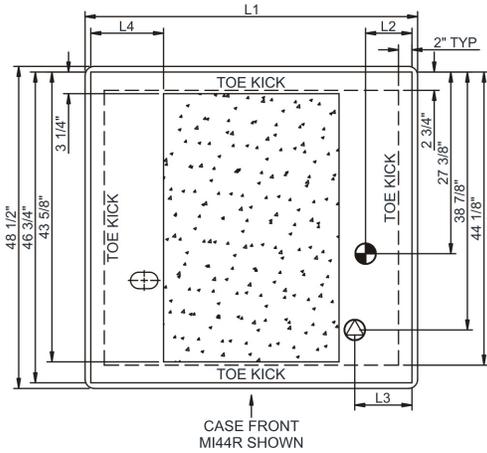

	"L3"	"L4"
MI44R	8 5/8"	11"
MI45R	8 5/8"	11"
MI46R	9 3/4"	10 3/8"
MI48R	21"	10 1/2"

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"		System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
MI44R	N/A	50.13	7.00	Self-Contained	Circuit #1	110-120	1	60	16.00	1,480	2+G	5-20P or L5-20P	N/A	N/A	N/A	850
MI45R	N/A	62.13	7.00	Self-Contained	Circuit #1	110-120	1	60	15.15	1,535	2+G	5-20P or L5-20P	N/A	N/A	N/A	1,000
MI46R	N/A	74.13	7.00	Self-Contained	Circuit #1	208-240	1	60	12.00	1,899	2+G	6-20P or L6-20P	N/A	N/A	N/A	1,100
MI48R	N/A	98.13	7.00	Self-Contained	Circuit #1	208-240	1	60	15.31	2,982	2+G	6-20P or L6-20P	N/A	N/A	N/A	1,200

\*\*\* Does not include electric defrost on freezer models.

**Important Notes:**

- 1) **ELECTRICAL NOTE:** If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- ⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Regulatory Approvals:	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF 7

