



TRIPLE BLEND: ALES, LAGERS AND STOUTS

- On-site accurate blending of CO₂ and nitrogen gases.
- Save money by not purchasing expensive premixed gas cylinders.
- Save labor by not changing gas cylinders.
- Increase profits by serving a consistent perfect pint.




MM300

Part No.	Gas Blends	Shipping Weight
□ MM300	Ales / Lagers: 75% CO2 / 25% N2	4 kg
	Ales / Lagers: 60% CO2 / 40% N2	8 lbs
	Stouts: 25% CO2/75% N2	

Performance

Inlet Barb:	9.52mm (3/8")
Outlet Barb:	9.52mm (3/8")
Outlet Pressure:	Factory preset at 3.45 bar (50 psi), non-adjustable
Accuracy and Flow Range:	2% of full scale or better with the flow range of .4 to 40 liters per minute (.85 to 85 cubic feet per hour)

Dimensions

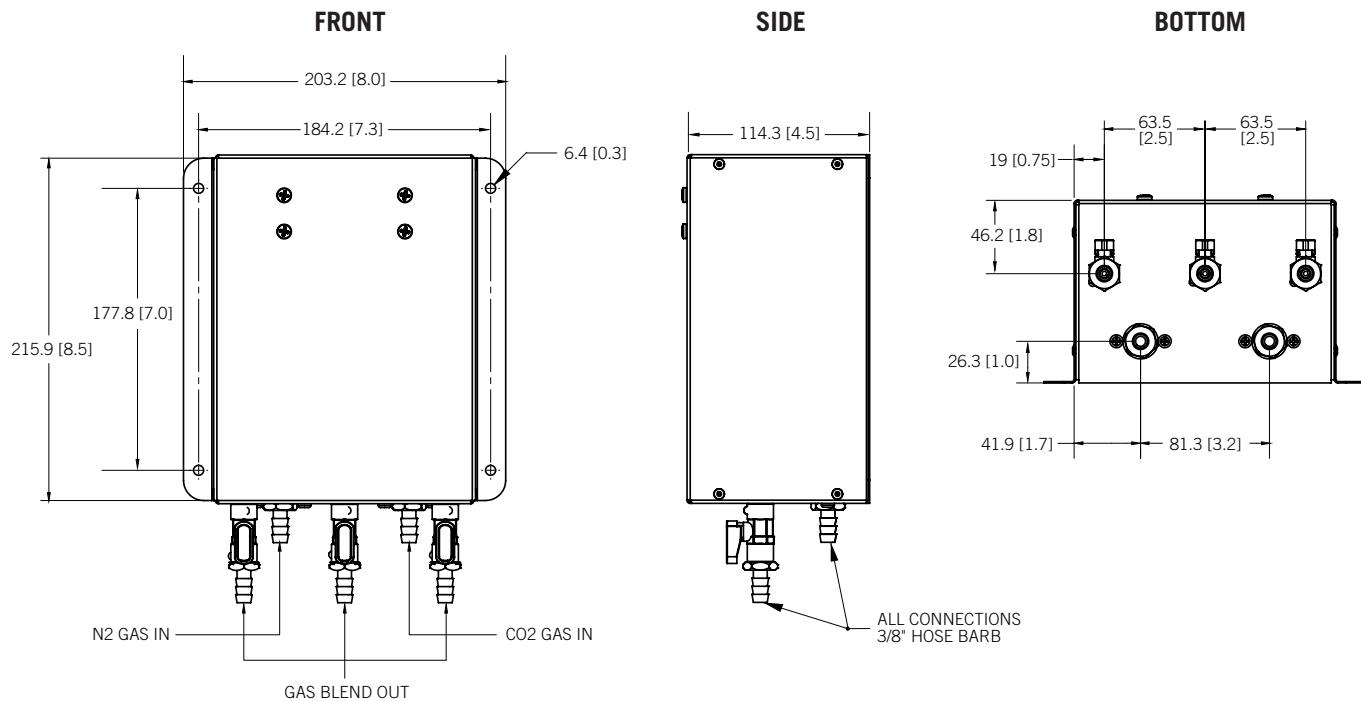

Toll-Free: 1-866-327-4159
www.micromatic.com

West

19791 Bahama St.
 Northridge, CA 91324
 Tel. (818) 701-9765
 Fax. (818) 701-9844

Central

10726 North Second St.
 Machesney Park, IL 61115
 Tel. (815) 968-7557
 Fax. (815) 968-0363

Southeast

15111 Dispense Ln.
 Brooksville, FL 34604
 Tel. (352) 799-6331
 Fax. (352) 796-2429

Northeast

4601 Saucon Creek Rd.
 Center Valley, PA 18034
 Tel. (610) 625-4464
 Fax. (610) 625-4466