

# HSM-38/3S

## HEATED SHELF MERCHANDISER



- Three-shelf merchandiser incorporates thermal kinetic glass technology to provide three evenly heated display surfaces.
- Packaged foods are held at safe temperatures to offer quality holding on each of the three independently controlled shelves.
- Low wattage fluorescent lighting at the top of each shelf enhances the display while the glass shelves provide the low power usage of kinetic energy.
- Vertical display maximizes packaged product capacity in a small linear footprint while the glass side panels offer greater product visibility from both sides of each illuminated shelf.

The multi-shelf merchandiser includes heavy-duty, non-magnetic stainless steel construction throughout. Each of the three (3) shelves are controlled by one (1) adjustable thermostat with a range of 0 to 10, and includes one (1) heat-on indicator light. The controls are protected by a sliding panel on the front of the merchandiser. Two (2) shelves are angled at 8° for visibility, and include one (1) warm-light fluorescent above each shelf. The bottom shelf is flat. Front mounted heat-guards provide customer protection. Solar cool, bronze side glass reflects heat back into the product area and mirrors the display to enhance the merchandising effect. 4" (102mm) adjustable legs, stainless steel front panel and black laminate end panels are standard.

☐ **MODEL HSM-38/3S:** Three-tier, self-service merchandiser, 38" (964mm) width



ANSI/NSF 4


COOKING APPLIANCE  
584m


IP X4

### FACTORY INSTALLED OPTIONS

- Electrical Choices
  - ☐ 208-240V
  - ☐ 230V
- Reach-in merchandiser is standard.
  - ☐ Specify pass-through design as a special order.
- Front Panel color choices:
  - ☐ Stainless Steel, standard
  - ☐ Black, optional
  - ☐ Burgundy, optional

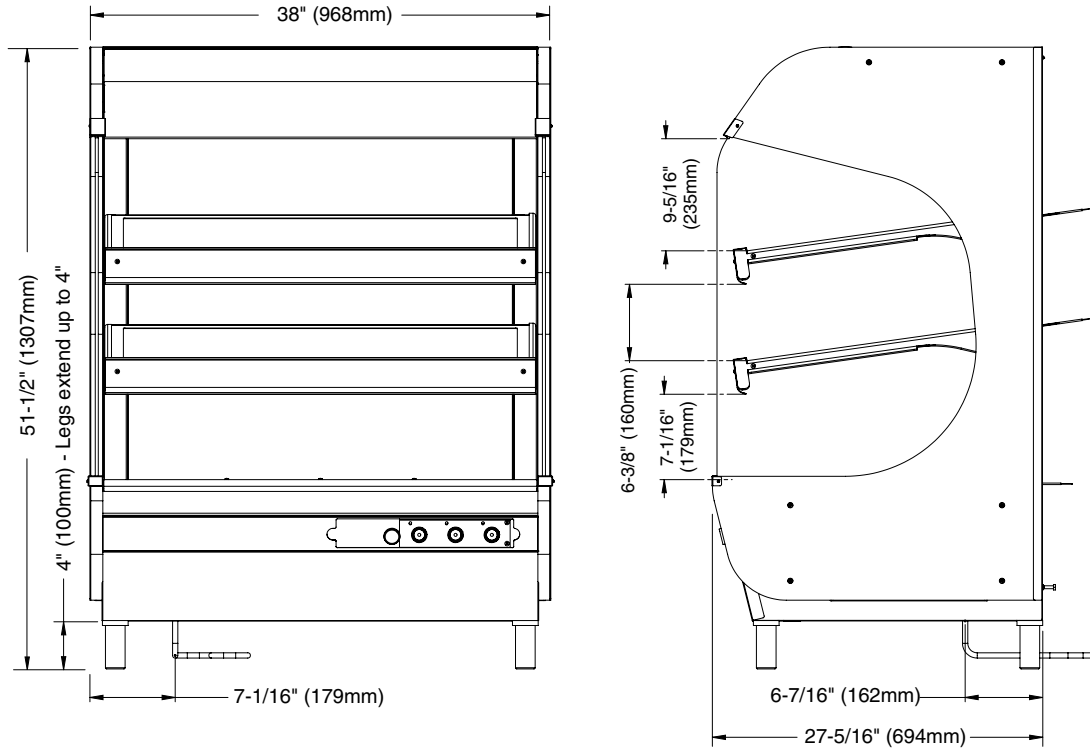


W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA

FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

[www.alto-shaam.com](http://www.alto-shaam.com)



### EXTERIOR DIMENSIONS: H x W x D

51-1/2" x 38" x 27-5/16"  
(1307mm x 968mm x 694mm)

### SHELF DIMENSIONS: W x D

Top two shelves: 32-7/8" x 20" (835mm x 508mm)  
– spaced at 7-3/8" (187mm) centers  
Bottom shelf: 33-3/8" x 23" (848mm x 584mm)  
– spaced at 7-7/8" (200mm) centers

### ELECTRICAL, HSM-38/3S THREE SHELF UNIT

VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW		
208	1	60	10.8	2.3		NEMA 6-20P
240	1	60	12.5	3.0		20A-250V
RECOMMENDED						
MUST BE ON ITS OWN 20AMP CIRCUIT						
230	1	50/60	11.8	2.7		CEE 7/7 220-230V PLUG

### INSTALLATION REQUIREMENTS

Unit must be installed level. It must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions. In order to maintain NSF standards, stationary models must be sealed at bottom by NSF approved sealant or equipped with 4" (102mm) legs for counter top applications.

### PRODUCT CAPACITY

72 lb (33 kg) MAXIMUM  
24 lb (11 kg) MAXIMUM PER SHELF

#### EACH SHELF

Eight (8) chicken boats with dome cover

### WEIGHT

NET 335 lb (152 kg)  
SHIP 595 lb (270 kg)

#### CRATE DIMENSIONS: (L x W x H)

36" x 46" x 65"  
(914mm x 1168mm x 1651mm)

### CLEARANCE REQUIREMENTS

4" (102mm) at back of unit

### OPTIONS & ACCESSORIES

#### Base Stand

<input type="checkbox"/> Stainless Steel	5004919
<input type="checkbox"/> Black	5004920
<input type="checkbox"/> Burgundy	5002703