

PRODUCT SPECIFICATIONS

9" 1500 Unit Specifications

Input Voltage (nominal, AC, 50/60Hz)	volts 120 to 277
Input Power (typical)	watts 15
Input Current @ 120V AC	amps 0.125
Luminous Flux (typical)	lumens 1500


24" 2900 Unit Specifications

Input Voltage (nominal, AC, 50/60Hz)	volts 120 to 277
Input Power (typical)	watts 30
Input Current @ 120V AC	amps 0.242
Luminous Flux (typical)	lumens 2900

48" 4350 Unit Specifications

Input Voltage (nominal, AC, 50/60Hz)	volts 120 to 277
Input Power (typical)	watts 39
Input Current @ 120V AC	amps 0.325
Luminous Flux (typical)	lumens 4350

- Safety Testing: Complies to UL and/or CSA standards
- NSF International: NSF/ANSI 2 compliant
- Ingress Protection: IP65 compliant
- IESNA LM80-08: LEDs used comply with LM80-08 standards ensuring verifiable life-span.

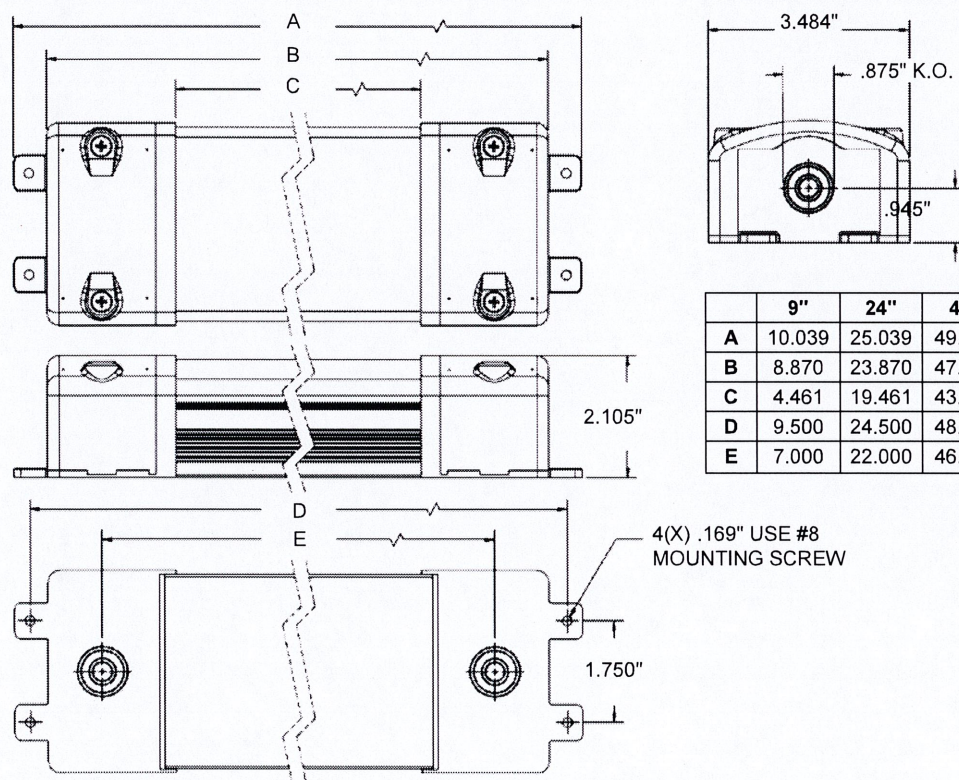

	9"	24"	48"
A	10.039	25.039	49.039
B	8.870	23.870	47.870
C	4.461	19.461	43.461
D	9.500	24.500	48.500
E	7.000	22.000	46.000



727 Second Street | Hudson, WI 54016
800-955-5253 | 715-386-6149 FAX
www.norlake.com



Revision Date: 6/18
Part Number: 158416