

ITEM NO:	
PROJECT:	
DATE:	

Refrigerated Self-Service Dual Sided Case

□ NR3647RSSV2

Lengths include end panels 36"L x 33"D x 51-5/8"H



STANDARD FEATURES
■ NOTE: Glass warranty onl

- NOTE: Glass warranty only applicable to first point of delivery
- Breeze~E (Type-II) w/ EnergyWise s/c refrigeration
- (2) Levels of clear glass shelving removable and adjustable on 1" centers
- Blue Fin coated coil
- Compressor air intake from rear and out front panel at toe kick. Front panel cannot be blocked.
- Condensate pan (self-contained refrig. only)
- Integrated average product temperature of 40°F or less
- LED top & shelf lights
- One piece formed ABS plastic tub
- One year parts & labor; 5 year compressor warranty

Features	Standard	Options
EXTERIOR COLOR	□ Black	 □ Painted (non-stock colors, specify RAL#) □ Painted (stock colors, specify RAL#) □ Stainless steel
INTERIOR COLOR	□ Black	 □ NOTE: Interior color must be FDA & NSF approved □ Painted (stock colors, specify RAL#) □ Stainless steel
PANEL EXTERIOR	 Laminated (non-premium) Confirm pattern/grain direction 	□ Laminated (premium) Confirm pattern/grain direction□ Stainless steel
BASE SUPPORT	□ Adjustable, locking casters	□ 6"H stainless steel legs□ Shims (standard w/ remote)
END PANEL LEFT	□ Full end panel	□ No end panel w/ synchronized defrost
END PANEL RIGHT	□ Full end panel	□ No end panel w/ synchronized defrost
LOWER FRONT PANEL	□ Black	□ Painted (stock colors, specify RAL#)□ Stainless steel
LOWER REAR PANEL	□ Black	□ Painted (stock colors, specify RAL#)□ Stainless steel
LIGHTS	□ LED 3500K w/ frosted lens	□ LED 3000K w/ frosted lens□ LED 4000K w/ frosted lens
ELECTRICAL CONNECT	□ 6' Straight blade power cord (self-cont.)	□ 6' Locking power cord (self-cont.)□ Electrical leads (remote)
REFRIGERATION	□ Breeze~E (Type-II) w/ EnergyWise s/c refrigeration (rear access)	 □ Breeze~E (Type-II) w/ EnergyWise s/c refrigeration (front access) □ Remote w/thermostat, solenoid & TXV (front access) □ Remote w/thermostat, solenoid & TXV (rear access)
MISCELLANEOUS		□ Second year parts & labor warranty (excludes compressor)
ACCESSORIES		□ Clean Sweep® coil cleaner (n/a w/remote) □ Clear acrylic security cover, removable, locking




Intended Environment: Type II - Designed to operate in ambient conditions of 80°F and 60% relative humidity unless noted otherwise in system information below.

Intended Product To Be Displayed


Warmest Avg Prod Temp ° F

PLAN VIEW

Packaged refrigerated products SIDE VIEW



NOTE: SELF-CONTAINED REFRIGERATION CONNECTIONS ONLY ACCESSIBLE BY PULLING OUT CONDENSER DRAWER

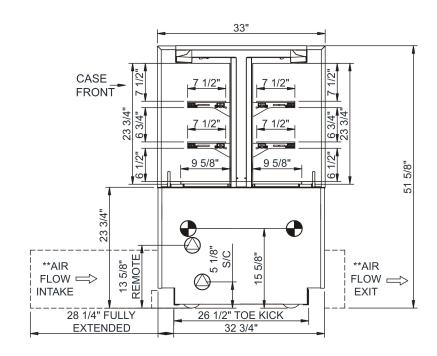

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD). LOCATION OF DRAIN TUBE FOR REMOTE REF ONLY (SUPPLIED WITH 3/4" OR 11/2" PVC TUBE).

REFRIGERATION LINE CONNECTION.

SELF-CONTAINED CASE SERVICE ACCESS AREA.

REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps	Watts	Wires	NEMA Plug	SST	Rack	Para. Rack BTUH	Est Wt	
NR3647RSSV2	N/A	36.00	.00	Self-Contained	Circuit #1	208-240	1	60	10.98	1,565	2+G	6-15P or L6-15P	N/A	N/A	N/A	800

*** Does not include electric defrost on freezer models.

R	leg	ul	at	o	ry	Α	р	р	ro	٧	a	Is	•

All Models Accordance with AHRI Std 1200 ETL Listed to UL 471

ETL Listed to CAN/CSA 22.2 No. 120

ETL Sanitation to NSF 7







Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Back side of counter must be open or vented the full length of the unit to allow proper ventilation for the refrigeration system.
- 3) Glass warranty only applicable to first point of delivery.

<u> MARNING:</u> This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.