


Size (inches) Nominal W x H x D	Size (inches) Actual W x H x D	Koch Part Number	Capacity (CFM)	Initial Resistance (inches W.G.)	Media Area (Sq. Ft.)
12 x 24 x 4	11-3/8x23-3/8x3-3/4	102-790-023	1000	0.39	9.9
16 x 20 x 4	15-1/2x19-1/2x3-3/4	102-790-025	1115	0.39	11.4
16 x 24 x 4	15-3/8x23-3/8x3-3/4	102-054-005	1340	0.39	13.6
16 x 25 x 4	15-1/2x24-1/2x3-3/4	102-790-026	1400	0.39	14.2
18 x 24 x 4	17-1/2x23-3/8x3-3/4	102-790-027	1500	0.39	16.1
20 x 20 x 4	19-1/2x19-1/2x3-3/4	102-790-028	1400	0.39	14.4
20 x 24 x 4	19-1/2x23-3/8x3-3/4	102-790-029	1675	0.39	17.3
20 x 25 x 4	19-1/2x24-1/2x3-3/4	102-790-030	1740	0.39	18.1
24 x 24 x 4	23-3/8x23-3/8x3-3/4	102-790-031	2000	0.39	21.0

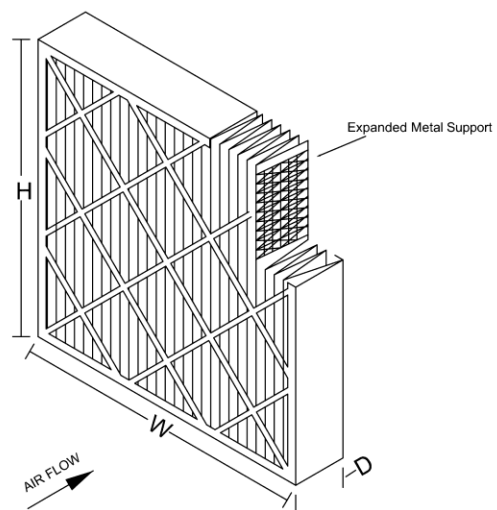

Standard Construction:

1. 100% Synthetic Media Upstream and Impregnated Carbon Media Downstream
2. Rust Resistant Expanded Metal Support on Downstream Side
3. Moisture Resistant Beverage Board Frame (24 point)
4. Double Wall Frame
5. 9 Pleats per Linear Ft.
6. Carbon Weight: 77 gsm

Specifications:

1. Efficiency: MERV 8 (ASHRAE Standard 52.2-2012)
2. Efficiency: 25-30% (ASHRAE Standard 52.1-1992)
3. Final Resistance: 1.0" W.G.
4. Rated Velocity: 500 FPM
5. Classified per UL Standard 900
6. Max Operating Temp: 150 degree Fahrenheit and 66 Celsius
7. Tolerance: Height & Width - +/- 1/8"
8. Tolerance: Depth - +/- 1/16"

Koch Filter Corporation
Filtration Products Crafted with Pride
KFC
P.O. Box 3186 - Louisville KY 40201
625 W. Hill Street - Louisville KY 40208
Phone: (502) 634-4796 FAX: (502) 637-2280

Odorkleen ES
4" Standard Capacity

Drawn By:

Matt Ball

Date:

August 19, 2013

REV.

D