

**\* NEW MODELS**



**COMMERCIAL POWER AT  
AN AFFORDABLE PRICE**



SE2UL CX208

**LCT**  
**LIQUID COMBUSTION TECHNOLOGY**



SE3SL CX223


### Pump:

- Constructed of corrosion resistant polyester
- Stainless Steel fasteners throughout
- EPDM elastomer (Buna and Viton® available)
- Stainless steel shaft seal with carbon/ceramic faces
- Your choice of 2" or 3" ports
- Maximum shut off pressure 52 psi
- Suction Lift to 25 ft (7.6 meters)
- Flows to 300 GPM

### Engine:

- LCT CX PRO, 208cc / 223cc overhead valve engine
- Cast iron cylinder liner
- Viton oil seal
- Low oil shut-off for extra engine protection
- Meets Carb and EPA emission standards
- Dual Ball Bearings
- Forged steel crankshaft and camshaft
- Large capacity fuel tank
- 3 year warranty

### PERFORMANCE CURVES

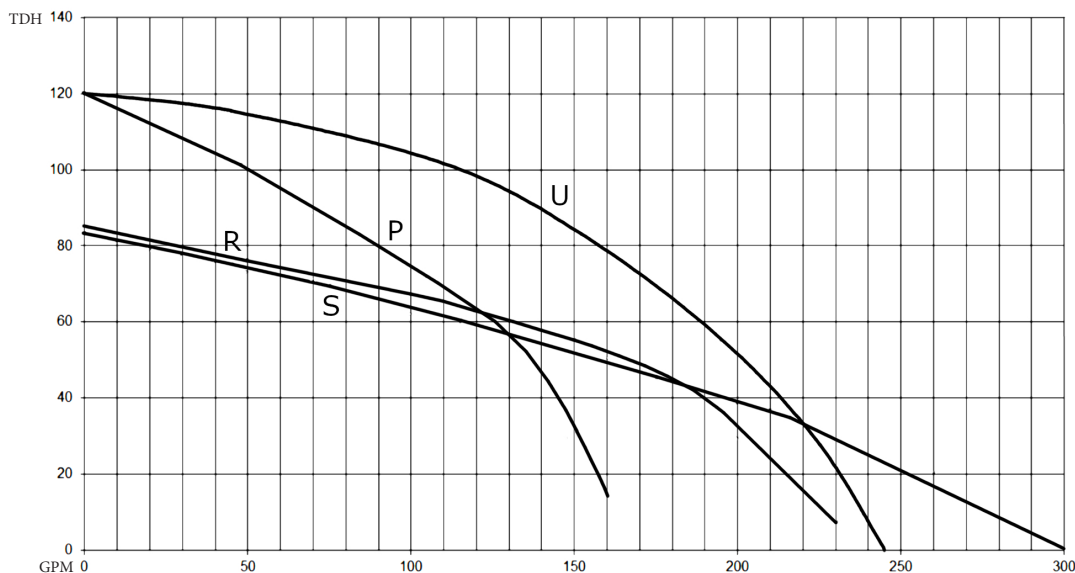

CURVE	MODEL	PORT SIZE	MAX FLOW	MAX TDH	WEIGHT
P	SE2PL E5.5	2" NPT	150 GPM	120 ft.	50 lbs
U	SE2UL CX208	2" NPT	200 GPM	120 ft.	50 lbs
R	SE2RL CX208	2" NPT	230 GPM	83 ft.	50 lbs
S	SE3SL CX223	3" NPT	280 GPM	83 ft.	55 lbs



Division of ASM Industries, Inc.

41 Industrial Circle  
Lancaster PA 17601

email: [sales@pacerpumps.com](mailto:sales@pacerpumps.com)

[www.pacerpumps.com](http://www.pacerpumps.com)

Phone: 717-925-8240

Toll Free: 800-233-3861

FAX: 717-925-8242

