

PRO-16 Floor Model Proofer



SIZE:

PRO-16 - 74-1/16" High, 24-5/16" Wide, 33-3/4" Deep
1932 mm High, 618 mm Wide, 857 mm Deep

NU-VU's PRO-16 Floor model proofer has a stainless steel exterior and tempered glass doors for full view of your product. A manual fill water pan located at the bottom of the unit provides the humidity, while the fan provides uniform distribution of heat and humidity.

The PRO-16 has a capacity of 16 full size pans and 32 half-size pans.

CONSTRUCTION:

- Welded stainless steel exterior
- Aluminum interior
- Fully insulated
- Control panel accessible through front and top of unit
- Heating elements accessible inside of cabinet, and through bottom

CONTROLS:

- Mechanical controls
- Indicator light for thermostat
- Separate heat and humidity controls

LABORATORY CERTIFICATION AND APPROVAL



STANDARD FEATURES:

- Stainless steel exterior
- Aluminum interior
- Heavy duty casters
- Full view tempered glass door
- Silicone rubber door gaskets
- Manual fill water pan
- Cord and plug

OPTIONAL FEATURES:

- Warmer
- Set of 6" legs

NU-VU® PRO-16 Floor Model Proofer




NU-VU® Food Service Systems

www.nu-vu.com
5600 13th Street
Menominee, MI 49858

1-800-338-9886 Toll Free
1-906-863-4401 Phone
1-906-863-5889 Fax

PRO-16 Floor Model Proofer

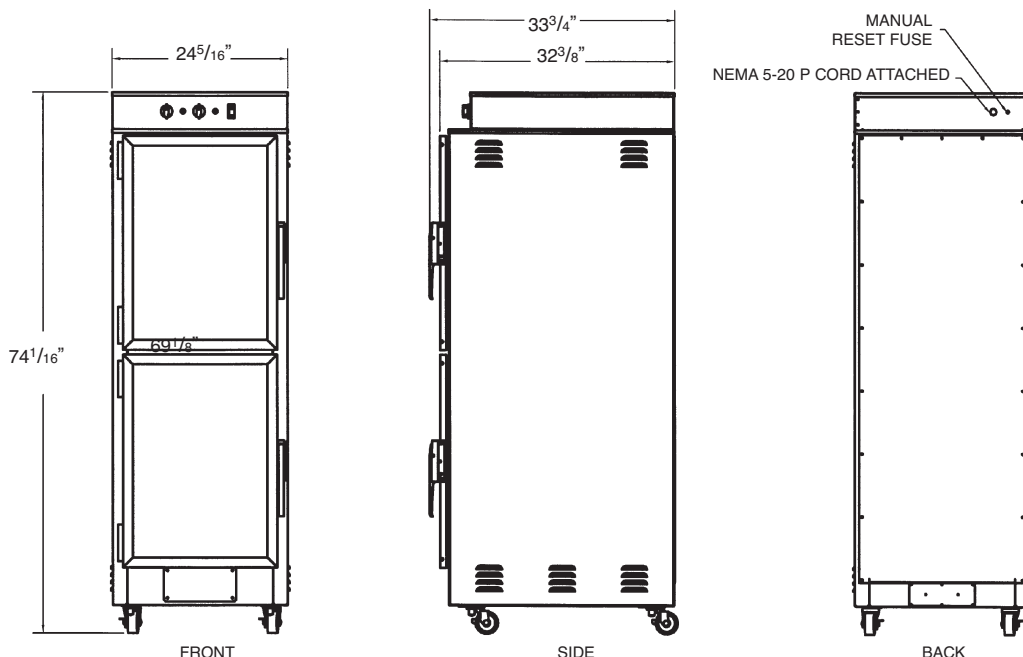

SPECIFICATIONS:

INSTALLATION:

Allow four inches on each side and back of unit for ventilation of oven.

SERVICE CONNECTIONS:

- PRO-16 is shipped from factory with cord and plug, NEMA 5-20P

ELECTRICAL:

Amp Draw	120/1
	17.5

LISTINGS:

The PRO-16 has NSF & C-ETL-US listings.



CAPACITY:

	18"x26" Sheet Pans	13"x18" Sheet Pans	Spacing
Proofer	16	32	3-5/16"

DIMENSIONS:

	Height	Width	Depth
Exterior	74-1/16"	24-5/16"	33-3/4"
Interior	57-3/8"	18-3/8"	28-7/8"

DOOR SWING: Proofer - 23-7/8" (606 mm)

PACKING SIZE:

87" High, 40" Wide, 33" Deep
(2210 mm High, 1016 mm Wide, 838 mm Deep)

SHIPPING WEIGHT:

350 Pounds (159 Kg), FOB Menominee, MI 49858

NU-VU® PRO-16 Floor Model Proofer